

# Replacing the LED board



1) Turn off power to luminaires.



2) Remove 4 screws from LED board.



3) Board will hang, held by 2 wires.




4) Loosen 2 top screws and remove top cover.



5) Cut blue and red LED board wires and remove bad LED board.



6) Route the new wires through the wire way hole in the housing.


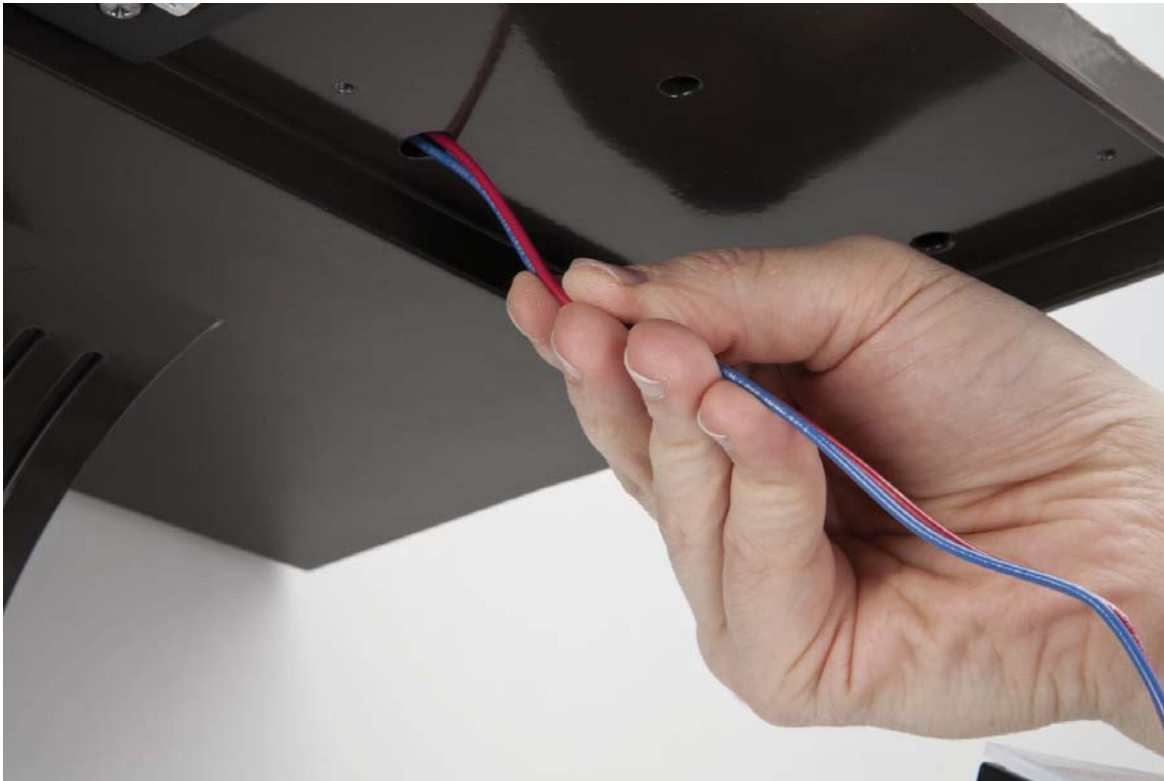


7) Screw in 4 LED board screws.





8) Strip wires and use wire nuts to connect red to red and blue to blue.

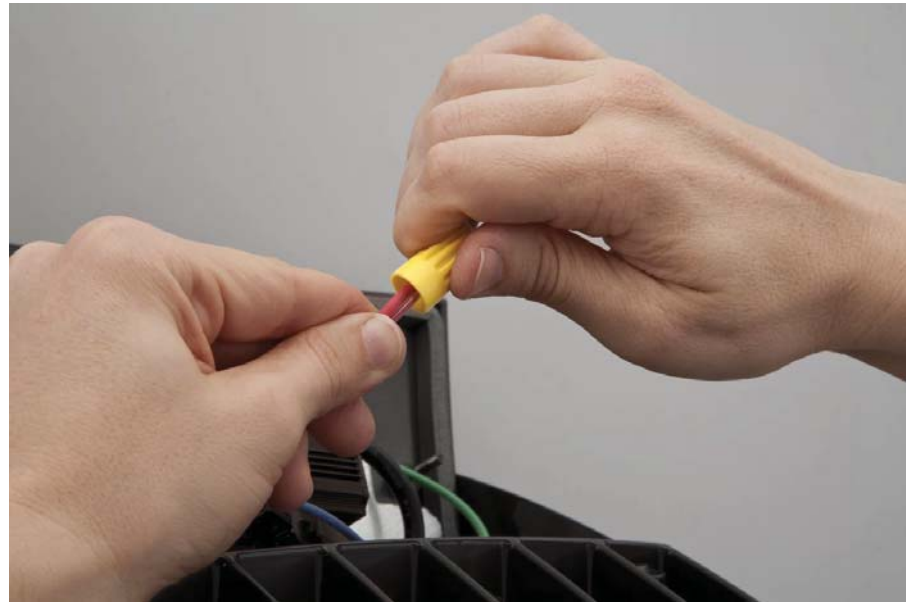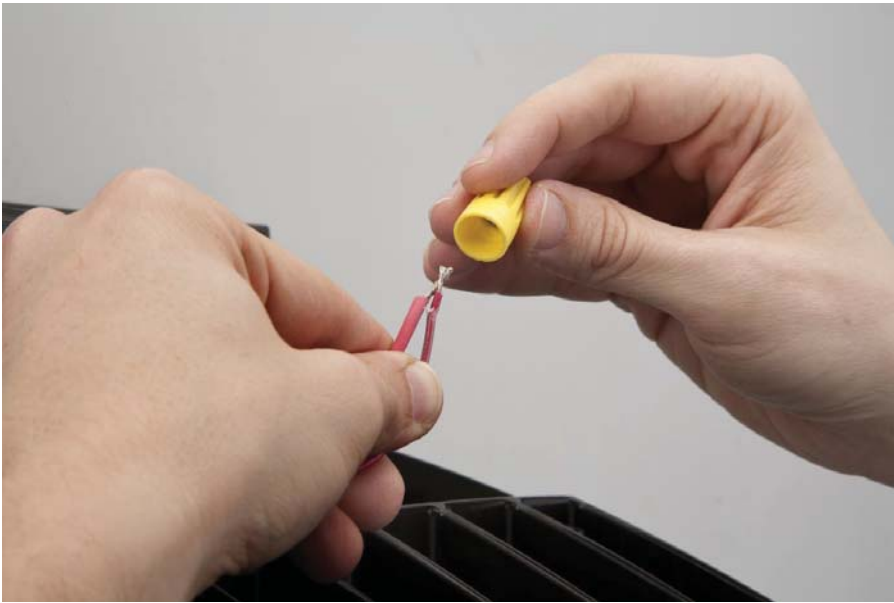

9) Reinstall lid, making sure no wires are pinched. Screw down 2 screws.

