

Occupancy / Vacancy Sensors

FEATURES:

- Turn lights On/Off automatically
- Provides built-in On/Off pushbutton
- Time delay Off setting is adjustable from 15 seconds to 30 minutes
- Single pole feed & Single output
- Zero crossing function
- Adjustable sensitivity settings
- Standard decorator wall plate included
- Controls incandescent, CFL, and LED lighting
- Five year warranty

Decorator Passive Infrared Wall Switch Occupancy Sensors (2 in 1)

DESCRIPTION	CAT.NO.	RATING	COVERAGE	COLOR
Single Pole, Decorator Wall Switch PIR Occupancy Sensor	DWOS	Incandescent: 800W @ 120VAC Fluorescent: 800VA @ 120VAC Motor: 1/4HP @ 120VAC	180°, 1200sq.ft	White
Single Pole, Decorator Wall Switch PIR Occupancy Sensor Built-in Night light	DWOS-NL	Incandescent: 800W @ 120VAC Fluorescent: 800VA @ 120VAC Motor: 1/4HP @ 120VAC	180°, 1200sq.ft	White
3-Way, Decorator Wall Switch PIR Occupancy Sensor	DWOS-3R	Incandescent: 800W @ 120VAC Fluorescent: 800VA @ 120VAC Motor: 1/4HP @ 120VAC	180°, 1200sq.ft	White




DWOS



DWOS-NL

Coverage Pattern:

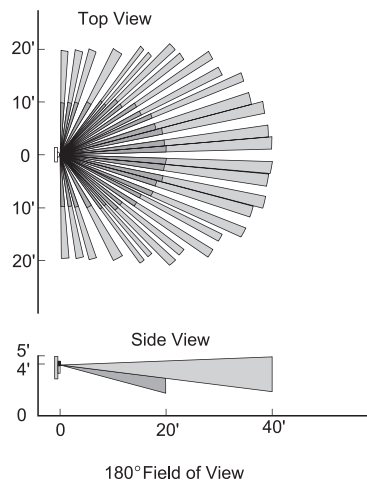

Best: 320 sq.ft.
Regular: 800 sq.ft.
Maximum: 1200 sq.ft.



TESTING & CODE COMPLIANCE:

- UL/CUL Listed
- ISO9001 registered manufacturing facility

TYPICAL APPLICATIONS:

- Offices
- Copy Rooms
- Storage Closets
- Small Conference Rooms
- Small Restrooms
- Maintenance Closets
- Break Rooms

