


PL H 9.5W DIR TITANIUM LED SERIES



9.5W REPLACES




**26W
CFL**

60% Energy Savings

PRO



- Easy to install - Plug & Play Direct
- Ballast output power control technology
- Exceptional efficacy 98 LPW
- Compatible with most electronic ballasts
- Available in 2700K, 3000K, 3500K & 4000K CCT




PL PRODUCT FEATURES

High Performance - Ballast Smart Control

The PL DIR lamp's ballast smart control technology allows for high performance even on lower powered ballasts, making it a suitable replacement for 13W, 18W, 26W, 32W and 42W CFL PL lamps.

Ballast Type	Lumens	Bare Lamp
13W	590	5.2W
18W	700	6W
26W	935	9.5W

Adjustable Base

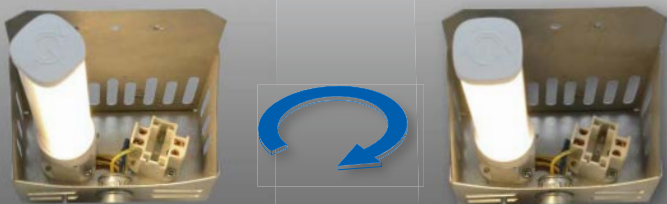


This PL H lamp features a base that can be rotated 310° to fit any socket configuration. After installation simply rotate the lamp to achieve maximum light output.

PL H 9.5W DIR TITANIUM LED SERIES




APPLICATIONS


Retail

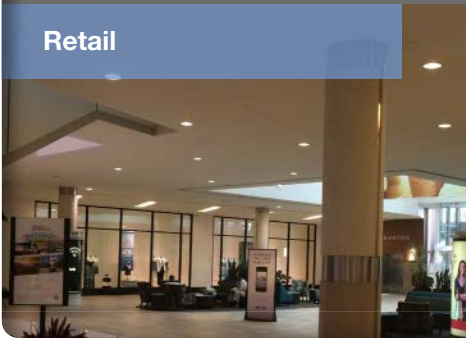

Hospitality

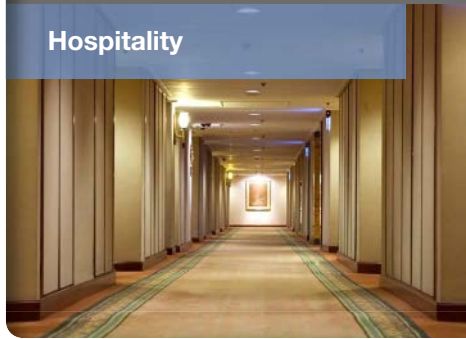


Office

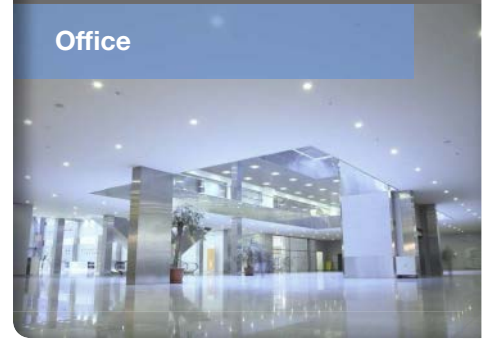

Ref.#: DS157-PLH-9.5W-DIR

Base: G24q & GX24q (4-pin CFL)
Voltage: Ballast compatible 120-277V
PF: 0.9
Lifetime: 50,000 hrs
Weight: 0.18lb / 82g

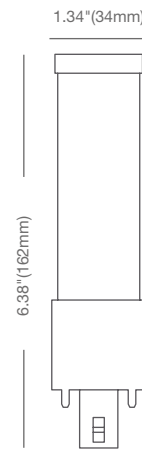

SPECIFICATIONS*

Model	Product	Power (W)	CCT	CRI (typ.)	Lumens	LPW	Beam Angle
9.5PLH/827/DIR	57899	9.5	Soft White 2700K	80	870	92	110°
9.5PLH/830/DIR	57900	9.5	Warm White 3000K	80	920	97	110°
9.5PLH/835/DIR	57901	9.5	Neutral White 3500K	80	920	97	110°
9.5PLH/840/DIR	57902	9.5	Cool White 4000K	80	935	98	110°

BALLAST PERFORMANCE

Ballast Type	Bare Lamp (W)	System (W)	2700K Lumens	3000K Lumens	3500K Lumens	4000K Lumens
13W	5.2	6.9	520	540	540	590
18W	6	8	620	650	650	700
26W	9.5	11.5	870	920	920	935
42W	10.4	13	980	1020	1020	1050

Testing Method: Power and lumen output will vary based on number of lamps, ballast and fixture type. Above data is indicative only.

* Specification data is preliminary and may be subject to change

** Suitable for damp locations. Not for use where directly exposed to weather or water

*** Not intended for use in enclosed fixtures

**** Full installation guide and more details available on website