# SYLVANIA SMART<sup>+</sup> ZigBee<sup>®</sup> PAR38

# Soft White Lamp



Experience intelligent, connected lighting solutions in your home with SYLVANIA SMART<sup>+</sup> connected lights and accessories. Using a ZigBee® compatible home automation hub, easily set up your devices to accommodate your daily routine by creating schedules and automations that fit your lifestyle. Our ZigBee smart home lighting products can be combined with many other ZigBee devices and platforms to build the ultimate smart home automation system.

#### **Key Features & Benefits**

- Smart lighting controlled by smartphone or tablet, as well as through voice integration
- Compatible with major smart home automation systems
- Create schedules and light scenes to enhance your experience. Group lights to control them all at once
- SMART<sup>+</sup> System is controllable from inside the home or on the go

- On/Off/Dimming functions
- Color temperature: 3000 Kelvin
- Life: 11,000 hours rated life\*
- CRI 80+
- Wet Rated for Outdoor use

#### **Product Offering**

Ordering Abbreviation	Wattage	CCT	Contains
SMART+ PAR38 Soft White	13W	3000K	1 PAR38 LED Lamp

#### **Application Information**

### **Applications**

- General lighting
- Recessed downlights
- Track lighting
- Wall washer

#### **Market Segments**

- Residential
- Small business

#### **Application Notes**

- SMART<sup>+</sup> PAR38 requires ZigBee compatible home automation hub (Sold separately)
- 2. Product activation requires active WiFi Network and ZigBee compatible home automation hub (must be placed in range of wireless router)
- 3. Lamp turns on at 3000K, 100% brightness, but can be customized using the ZigBee compatible hub
- 4. 2-year limited product warranty
- 5. Operating temperature between -4°F and +113°F (-20°C and +45°C)
- 6. Suitable for use in dry, damp and wet indoor and outdoor locations
- 7. Do not install in totally enclosed luminaires
- 8. Not intended for use with dimmers, emergency light fixtures or exit lights
- Lamp dims via wireless control and will not operate with a dimmer switch, remove all existing dimmers and replace with a regular switch, leave lamp in ON position

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, please see www.sylvania.com/fcc15 br.

 $^{\star}\text{LED Lamp lifetime is defined as the number of hours when 50\% of a large group of identical lamps reaches 70\% of its initial lumens and the state of the s$ 

#### Specifications and Certifications







Contains: FCC ID: DZO-LDV-AETHER IC: 11099A-LDVAETHER



















# **Specification Data**

Catalog #	Туре
Project	
Project Comments	
Prepared by	


# **Ordering Information**

Item Number	Ordering Description	Wattage	Voltage	Lumens	CCT	Beam Angle	CRI	Life
74580	LED13PAR38DIM10YS+	13	120	1050	3000K	40°	80+	11.000


Ord	lering	a G	uide

LED	13	PAR38	DIM	10Y	S+	
LED	Wattage:	Lamp Type	Dimmable	Life	SMART <sup>+</sup>	
	13	PAR38				

# **Lamp Dimensions**

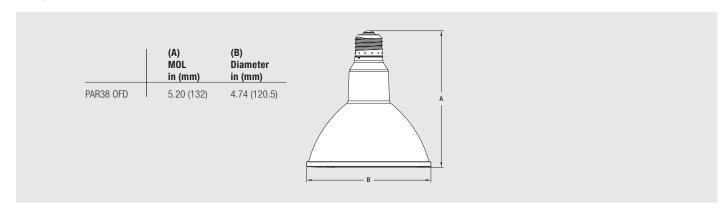

# **Photometric Distribution**

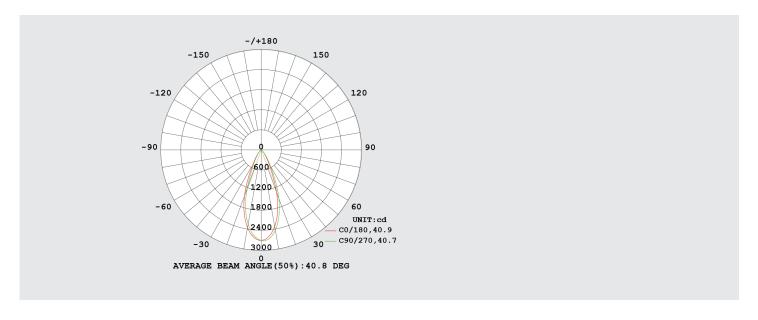

SYLVANIA and LEDVANCE are registered trademarks.

All other trademarks are those of their respective owners. Licensee of product trademark SYLVANIA in general lighting. Specifications subject to change without notice.

