

# LED-SLC12

# LED OUTDOOR LIGHT WITH SENSOR

LED New Construction and Remodel • Wet Location Rated • Replaceable LED Bulb



### Specifications:

#### Description:

LED outdoor Jelly Jar flood light with dusk to dawn photocell sensor provides safety and security in many commercial and residential applications. It is designed and built to be an energy efficient alternative to Metal Halides, High Pressure Sodium fixtures. The housing is made with durable polycarbonate materials. White diffuser. Wet location rated. Available in bronze and white finishes. Sensor lens cover provided for manual operation.

#### Features:

Heavy-duty, polycarbonate housing.  
Integrated photocell for Dusk to Dawn operation.  
White diffuser  
LED A19 Replaceable bulb

#### Performance:

Input Power	12W, Max LED lamp 15W
Input Voltage	120V
Input Frequency	60Hz
Initial Lumens	1100
Deliver Lumens	1000
CCT	4000k
CRI	80+
LPW	83.33
LED Bulb	12W 120V LED A19 Bulb
Life Hour	25,000 hrs
Warranty	3 years Limited
Listing	cETLus Classified. Wet Location
Accessories	Dia. 0.14" x 0.95" L Screw x 2 P3 Connector x 3, Mounting bracket x 1 Nipple x 1, Tooth washer x 1, Hex nut x 1 Decorative nut x 1, Light sensor cover x 1

#### Image:




White



Bronze

#### Included Mounting Option:

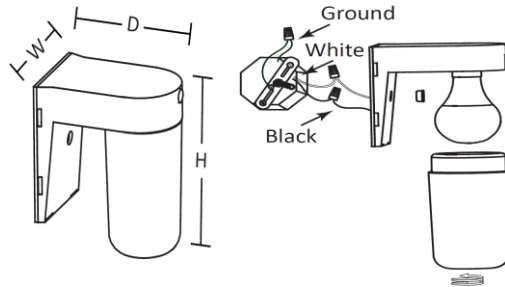

W=4 1/2" D=6 1/8" H=7 5/8"

#### Catalog Number:

Base	Finish	Color Temp.	CRI	Voltage
LED-SLC12WT	White	4000K	80+	120V
LED-SLC12BZA	Bronze	4000K	80+	120V

#### Electrical Data:

Input Voltage	120V
Input Frequency	60Hz
Power Factor	≥0.5

\*3000k/5000k available by request

