



COLOR/WATTAGE SELECTABLE LED FULL CUTOFF WALL PACK
WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS










WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.

CAUTION

- Carefully observe the grounding procedure under the installation section.
- Tighten all fixture components to their recommended torque values.

Installation Instructions

<p>Step 1. Remove the front cover by unscrewing the 2 screws on the right side of the fixture, and lay aside. (Fig1)</p> <p>Step 2. Method A: Drill holes at the three “A” mounting points on the rear housing (Fig2), and drill holes on the wall as per the hole locations on the rear housing (Fig3).</p>	   <p>Fig1</p> <p>Fig2</p> <p>Fig3</p>
<p>Method B: Drill holes as per existing junction box (Fig4).</p>	 <p>Fig4</p>
<p>Step 3. Feed the wires through the 1/2” knock out (Fig5), and install the rear housing.</p>	 <p>Fig5</p>
<p>Method A: Attach the rear housing to the wall using 3 screws (not provided). (Fig6)</p> <p>Method B: Attach the rear housing using 4 screws (not provided) to the existing junction box on the wall (Fig7).</p>	  <p>Fig6</p> <p>Fig7</p>
<p>Step 4. Attach the front cover with the rear housing, and connect the male and female connectors. (Fig8)</p>	 <p>Fig8</p>
<p>Step 5. Choose your desired wattage and color temperature using the DIP switches (located inside the unit). (Fig9)</p>	 <p>Fig9</p>



COLOR/WATTAGE SELECTABLE LED FULL CUTOFF WALL PACK

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Step 6. Check that the fixture works properly and secure the fixture using the 2 side screws. Installation is complete. (Fig10)


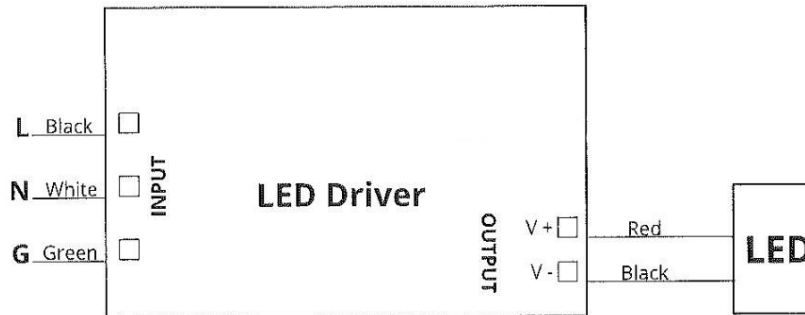


Fig 10

Wiring Diagram



⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.



COLOR/WATTAGE SELECTABLE LED FULL CUTOFF WALL PACK WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.