



# WATTAGE SELECTABLE UFO LED HIGH BAY FIXTURE

## WARNING, CAUTION, SAFETY, AND INSTALLATION INSTRUCTIONS

### WARNING

- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.
- Wait until the luminaire has cooled down before servicing.

### CAUTION

- Consult a qualified electrician to ensure correct branch circuit conductor.
- Not for use with an electric generator.
- Use wires that comply with UL or other local standards for wiring. The voltage AC120-277V should be wired with no less than 14 AWG, and the voltage AC220-480V should be wired with no less than 16 AWG.
- Do not install in narrow or enclosed areas.
- For use in environments where an accumulation of non-conductive dust on the luminaire may be expected.
- Do not install in a hazardous environment. The ambient temperature must not exceed the rated operating temperature of the product.
- Terminal block is not included.
- The external cord of this luminaire is not replaceable. If the cord is damaged, discard the luminaire and contact the manufacturer.
- Use with listed waterproof strain relief bushing when connecting the power supply cord to an outlet box.

### NOTICE

- Fixture mounting height should be no higher than 98 feet (30m).
- External passive 0-10V dimmers are supported.

## Installation Instructions

### Ring Mount Instruction

1. Mark the location on the ceiling to mount the fixture, making sure it can support the fixtures' weight.
2. Drill a hole for the hook and screw the hook into the hole.
3. Attach the chain to the hook. (Figure 1)
4. Attach the fixture to the chain and connect the power to the black wire, the neutral to the white wire, and green to ground.
5. Figure 2 presents fixture suspension from the 2 each provided safety cables.

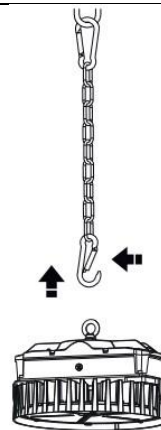


Figure 1

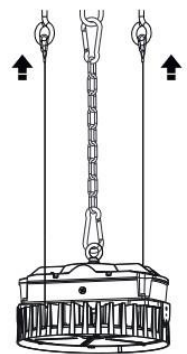


Figure 2




# WATTAGE SELECTABLE UFO LED HIGH BAY FIXTURE

## WARNING, CAUTION, SAFETY, AND INSTALLATION INSTRUCTIONS

### Surface Mount Instruction

<ol style="list-style-type: none"> <li>1. Install the expansion screw connecting the bracket to the ceiling, making sure that location can support the weight of the fixture.</li> <li>2. Connect the fixture onto the bracket and tighten the expansion screw. (Figure 4, Figure 5)</li> </ol>	<p>M 12 2 PCS 25 Nm 10 mm</p> <p>M 6 2 PCS 5.0 Nm 5 mm</p> <p>Figure 4      Figure 5</p>
<ol style="list-style-type: none"> <li>3. Adjust the fixture angle and connect power to the black wire, neutral to the white wire, and green to ground. (Figure 6)</li> </ol>	<p>Fix Screws</p> <p>Adjustable Angle <math>\pm 45^\circ</math></p> <p>Figure 6</p>

### Wiring Diagrams

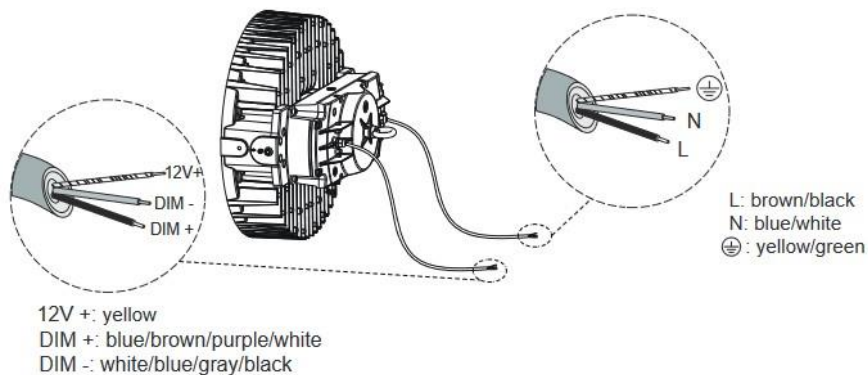

### Notice:

- Please use the dimming+, dimming- (DC10V) marked leads to connect to outside dimmer.
- Class 1 wiring only.
- Please assure a cumulative leakage current of less than 3.5mA on the control circuit.
- The AUX control wire with shrinkable tubing shall not be damaged (no connection).



## Wattage Adjustment Instruction

- Adjust the wattage with the wattage adjust switch atop of fixture.
- The default factory setting is maximum power. (Figure 15)

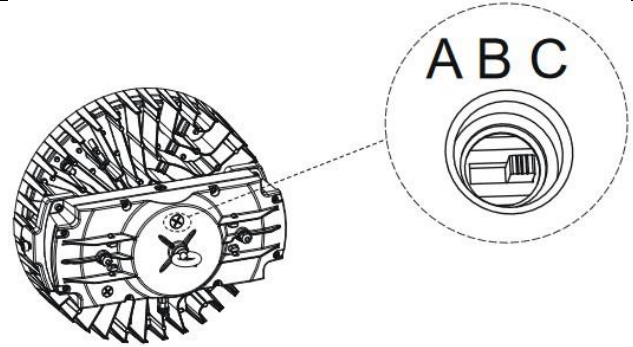


Figure 15

## **⚠ WARNING**

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

## **⚠ ADVERTENCIA**

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.



## WATTAGE SELECTABLE UFO LED HIGH BAY FIXTURE

### WARNING, CAUTION, SAFETY, AND INSTALLATION INSTRUCTIONS

- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.