



COLOR SELECTABLE LED CANOPY FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING

- Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.
- Read all installation instructions carefully before installation.
- Before installing, check the fixture for damage and make sure all accessories are present. If any pieces are missing or damaged, contact the manufacturer immediately.

CAUTION

- In the event of smoke or fire, turn off the power immediately and call a licensed electrician.
- Do not use an electric generator to test this fixture.

Installation Instructions

Installation Method 1: Surface Mounting

1. Disassemble the driver box cover. (Figure 2-1)
2. Loosen the 3/4" plug on the driver box cover using a screwdriver. (Figure 2-2)
3. Mark and drill the mounting holes in the ceiling according to the drill pattern. (Figure 2-3)
Drill Pattern Dimensions:
 - Outer Diameter: Ø90.0
 - Inner Diameter: Ø84.00
 - Depth: Ø71.0
4. Attach the driver box cover to the ceiling. (Figure 2-4)
5. Clip the safety cable in the driver box cover to the hook inside the driver box. (Figure 2-5)
6. Connect the input line and ground. If the fixture is equipped with a sensor, adjust the sensor settings. Take relevant waterproofing measures after the wires are connected. (Figure 2-6)
7. Align the driver box cover with the metal clips inside the driver box and press upward to fasten it together. (Fixture 2-7)
8. Lock the driver box in place using the four screws provided. The installation is complete. (Figure 2-8)



Figure 2-1



Figure 2-2




Figure 2-3




Figure 2-4




Figure 2-5




Figure 2-6




Figure 2-7




Figure 2-8



COLOR SELECTABLE LED CANOPY FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Installation Method 2: Pendant Mounting to 3/4" Stem

Stem is supplied by others

1. Disassemble the driver box cover. (Figure 1-1)
2. Loosen the 3/4" plug on the driver box cover using a screwdriver. (Figure 1-2)
3. Screw the driver box cover to the end of the stem. (Figure 1-3)
4. Clip the safety cable in the driver box cover to the hook inside the driver box. (Figure 1-4)
5. Connect the input line and ground. If the fixture is equipped with a sensor, adjust the sensor settings. Take relevant waterproofing measures after the wires are connected. (Figure 1-5)
6. Align the driver box cover with the metal clips inside the driver box and press upward to fasten it together. (Figure 1-6)
7. Lock the driver box in place using the four screws provided. The installation is complete. (Figure 1-7)

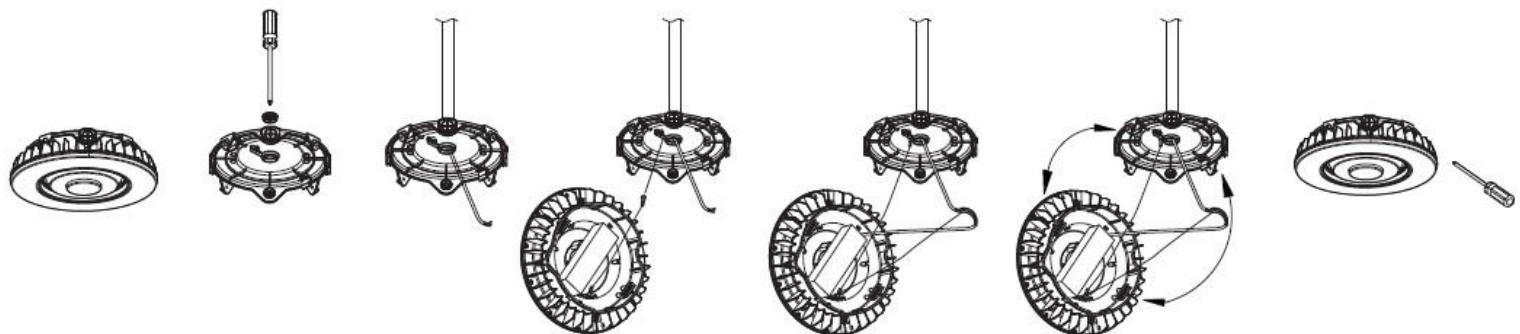


Figure 1-1

Figure 1-2

Figure 1-3


Figure 1-4

Figure 1-5

Figure 1-6

Figure 1-7

Wiring Diagrams

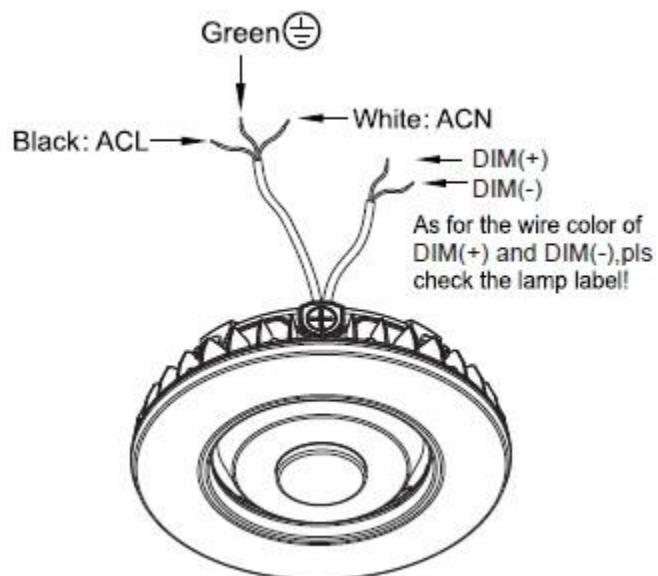



COLOR SELECTABLE LED CANOPY FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Field-Adjustable CCT


The color temperature (CCT) can be adjusted using the DIP switch (see figure below). The DIP switch has three options (left, middle, right) that corresponds to three color temperatures (3000K, 4000K, 5000K).

NOTE: Please turn off the power before adjusting the color temperature.

1. The DIP switch is located inside of the driver box (see fixture below).
2. Select a color temperature by sliding the switch left or right to the desired setting.

Factory Default Settings:

- PLT-13150 – 55W, 5000K
- PLT-13151 – 100W, 5000K

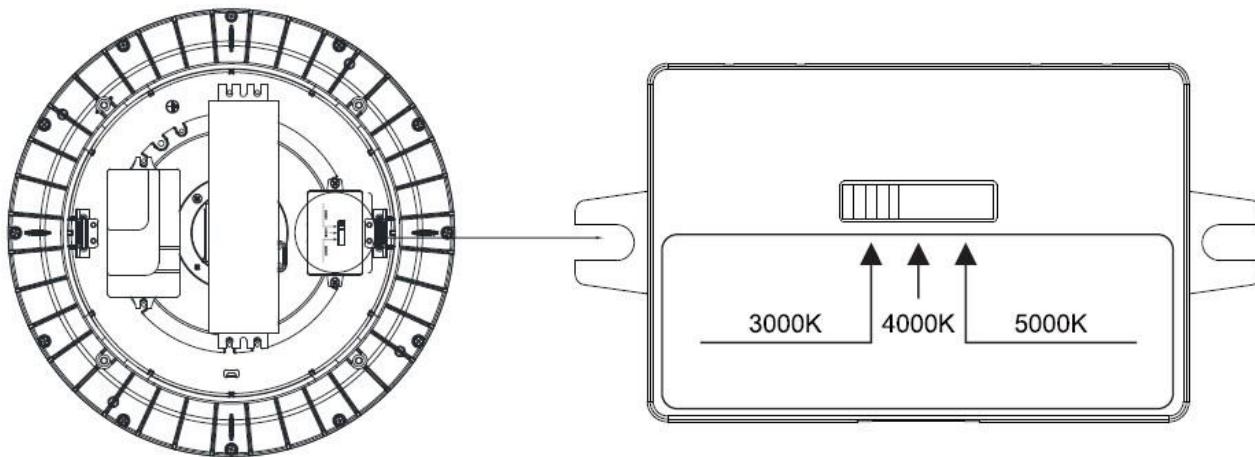

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be



COLOR SELECTABLE LED CANOPY FIXTURE

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.