



WALL MOUNT BRACKET FOR SELECT LINEAR FIXTURES

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING


- Installation, service, and maintenance of luminaires should be performed by a qualified licensed electrician.

CAUTION


- This wall mount bracket is compatible with PLT-90516

Installation Instructions

1. Open the accessory package and take out the accessories as shown in the diagram.

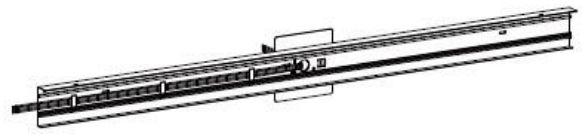

2. Drill mounting holes on the wall that corresponds with the mounting holes on the wall bracket, then insert plastic anchors (provided) into the holes.

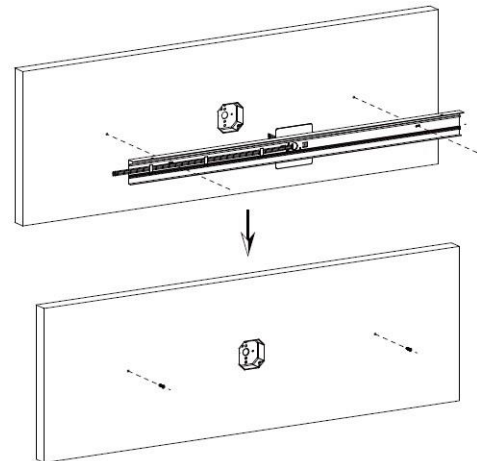





WALL MOUNT BRACKET FOR SELECT LINEAR FIXTURES


WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

3. Feed the power cord through the cover plate and use the wire nuts (provided) to connect the wires in the J-box (not provided).

After wiring connections are made, use two M4x30 screws (provided) to attach the bracket to the wall.

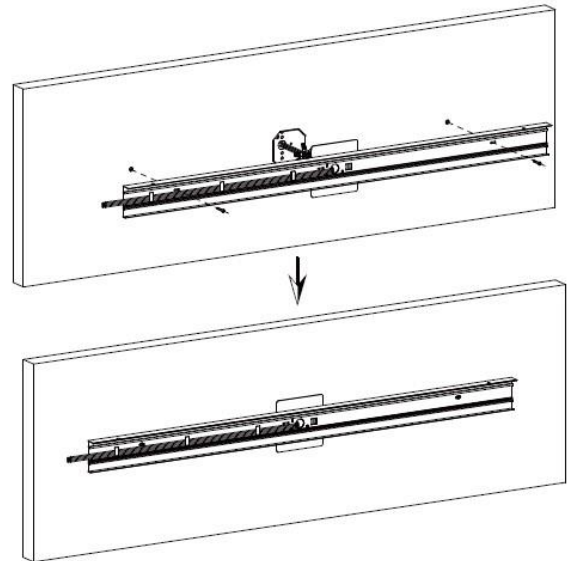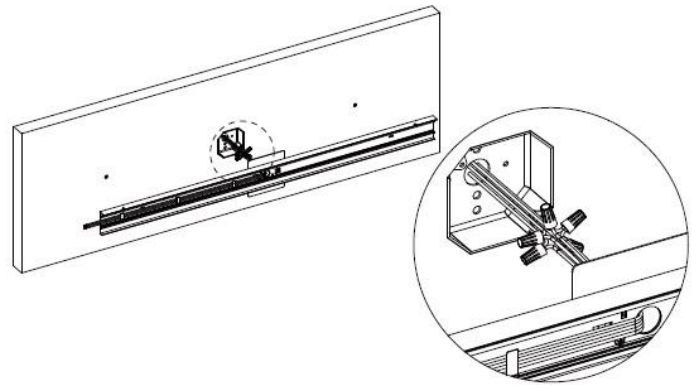

4. Remove both end caps, two suspension brackets, and silicone plugs from the fixture.

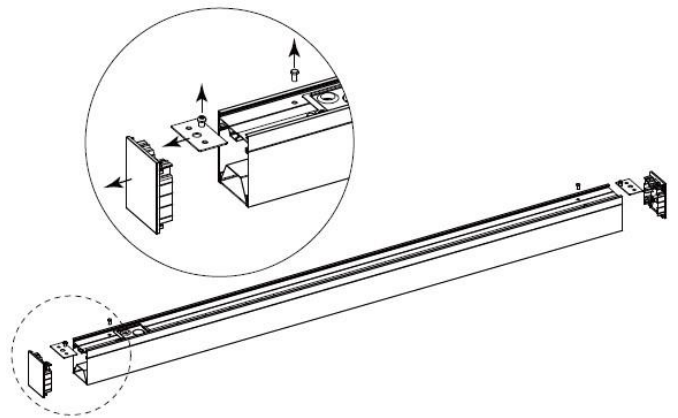




WALL MOUNT BRACKET FOR SELECT LINEAR FIXTURES

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

5. Attach the fixture to the wall mount bracket using two M5x12 screws (provided).

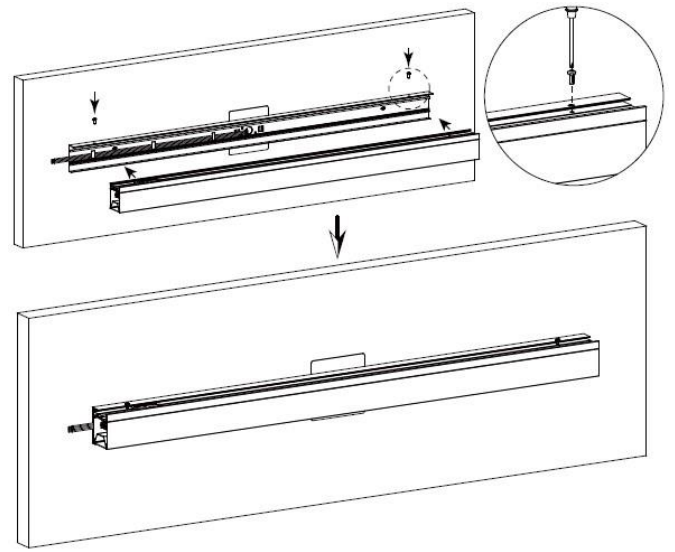


6. Connect the power cord to the fixture's input wires and plug the N, L, and G wires into the terminal block.


- White wire into terminal N
- Black wire into terminal L
- Yellow/Green wire into grounding terminal

Pink and purple wires are for dimming. If you are not using the dimming feature, cap these wires with wire nuts (provided).

- Purple: Dim+
- Pink: Dim-

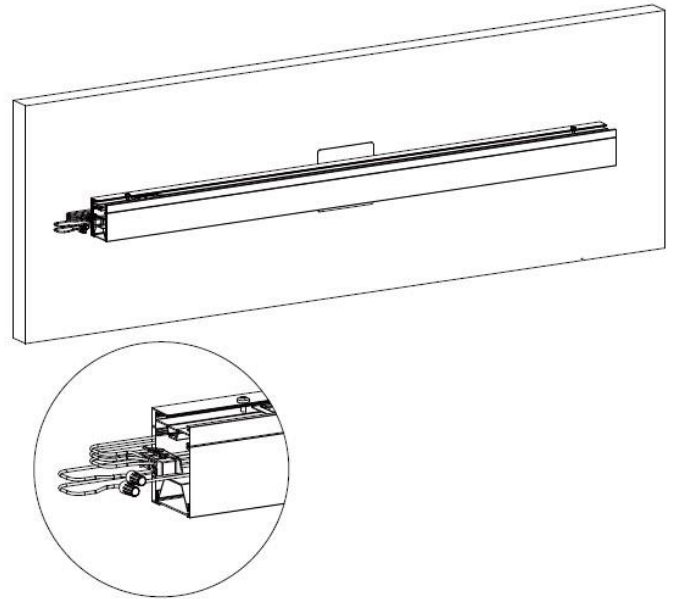

7. Tuck the wires into the fixture, and place wall mount end caps (provided) onto both ends.

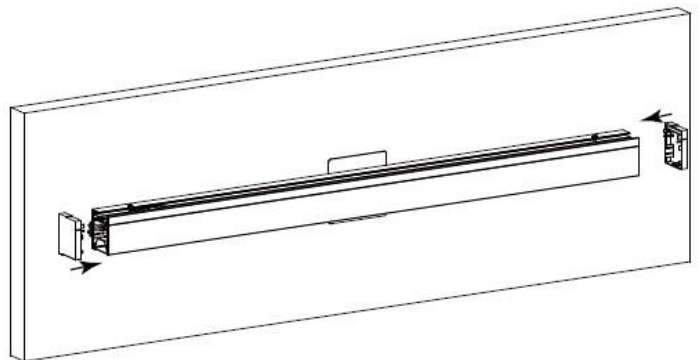




WALL MOUNT BRACKET FOR SELECT LINEAR FIXTURES

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

8. Installation is complete for a single fixture.

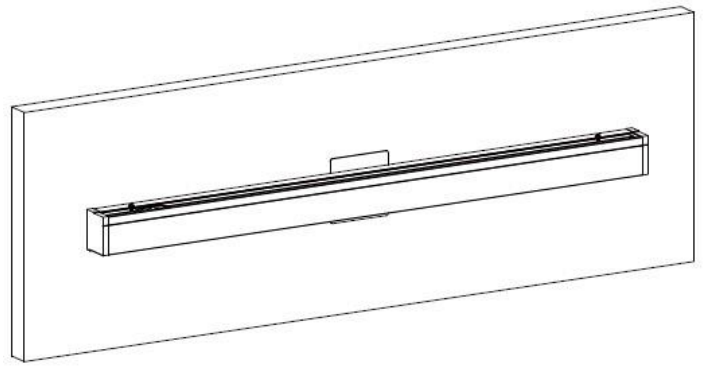

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.



WALL MOUNT BRACKET FOR SELECT LINEAR FIXTURES

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.