



T8 LED READY STRIP LIGHT FIXTURES

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

WARNING

- Installation, service, and maintenance of luminaries should be performed by a qualified licensed electrician.
- To reduce the risk of fire, electrical shock, or personal injury, read and follow all warnings and installation instructions before installation.

CAUTION

- This fixture operates LED lamps only. Do not attempt to install or operate fluorescent lamps in this fixture.
- All wiring must be installed in accordance with National Electric Code (NEC) and local electrical codes.
- Not suitable for wet locations.
- Verify that supply voltage is correct by comparing it with the fixture label information.
- To avoid damage and/or product malfunction, do not modify the fixture or replace accessories without confirming with the supplier first.
- To prevent fire, this fixture is rated for use in 120-277V, 50-60Hz protected circuit and 90°C rated supply wire.


NOTICE

- Account for small parts and destroy packing material, as these may be hazardous to children.

Compatible Lamps and Hardware List

Item #	Model Number	Compatible Lamps	Hardware List
PLT-50428	PLTSPR1111	Relamp only with 4' Single-Ended TYPE B T8 LED Lamp(s), ≤27.9W per lamp	Screws – 2 pcs Plastic Anchors – 2 pcs Guard Coil – 1 pc Twist-on Fastening Clip – 2 pcs
PLT-50429	PLTSPR2111	Relamp only with 4' Single-Ended TYPE B T8 LED Lamp(s), ≤27.9W per lamp	Screws – 2 pcs Plastic Anchors – 2 pcs Guard Coil – 1 pc Twist-on Fastening Clip – 2 pcs
PLT-50430	PLTSPR2112	Relamp only with 4' Double-Ended TYPE B T8 LED Lamp(s), ≤27.9W per lamp	Screws – 2 pcs Plastic Anchors – 2 pcs Guard Coil – 1 pc Twist-on Fastening Clip – 4 pcs
PLT-50431	PLTSPR3111	Relamp only with 4' Single-Ended TYPE B T8 LED Lamp(s), ≤27.9W per lamp	Screws – 2 pcs Plastic Anchors – 2 pcs Guard Coil – 1 pc Twist-on Fastening Clip – 4 pcs
PLT-50432	PLTSPR3112	Relamp only with 4' Double-Ended TYPE B T8 LED Lamp(s), ≤27.9W per lamp	Screws – 2 pcs Plastic Anchors – 2 pcs Guard Coil – 1 pc Twist-on Fastening Clip – 8 pcs

Installation Instructions

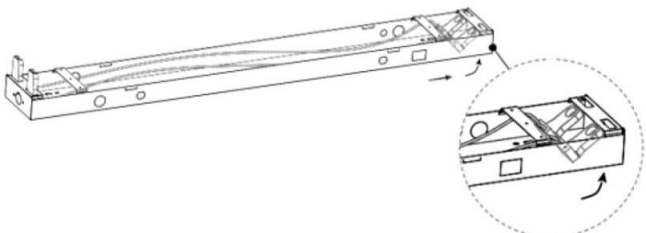
Step 1. Push the T8 lampholders up and into the rectangular cutouts at each end.	
--	--




T8 LED READY STRIP LIGHT FIXTURES

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Step 2. Pull the T8 lampholders until each snaps into place.

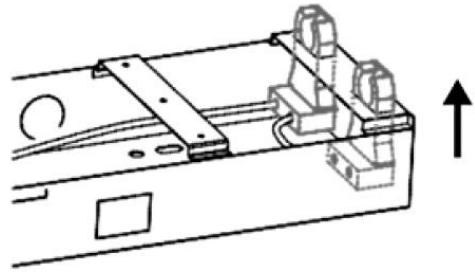


Step 3. Ensure each T8 lampholder is securely in place.

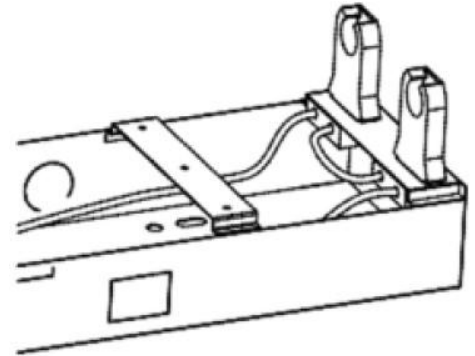


Step 4.

- Turn off the AC main power to ensure safety before proceeding.
- Mount the fixture onto a flat surface using the provided screws and plastic anchors.
- Pull the AC main wires through the knockout hole to prepare for internal wiring.
- Connect the (L), (N), and (Grnd) wires to the terminal block on the "input" side. Refer to the wiring diagram for guidance.

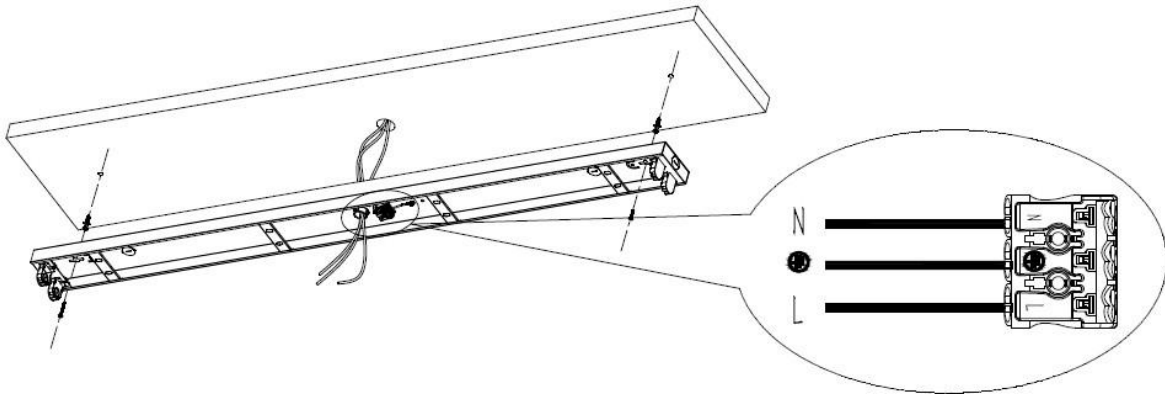

Step 5. Install the wiring cover by positioning it over the wired area.

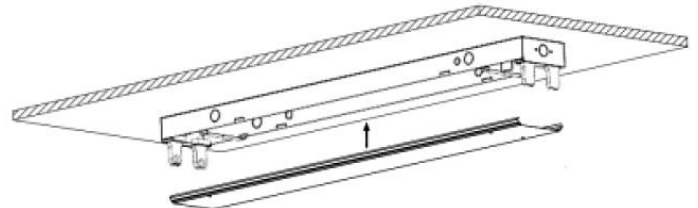





T8 LED READY STRIP LIGHT FIXTURES

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

Step 6. Secure the wiring cover by inserting the twist-on fastening clips and rotating them 90° until the cover is firmly in place.

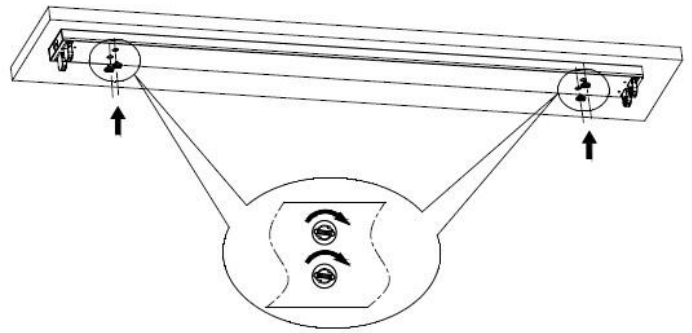

Step 7. Install the T8 LED tubes. Make sure the powered end of each tube is inserted into a powered lampholder.

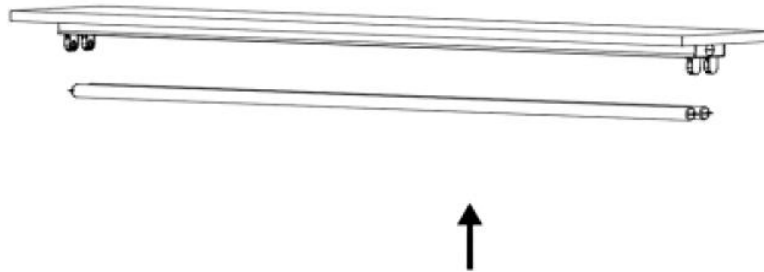

⚠ WARNING

- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- To reduce the risk of death, personal injury, or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Proper grounding is required to ensure safety.
- Power must be turned off at the breaker before installation or maintenance.
- This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
- Wear gloves and eye protection at all times while installing, servicing, or performing maintenance on the luminaire, and avoid direct eye exposure to the light source while it is on.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not install damaged product. Inspect luminaire for damage that may have occurred during transit. If damaged, contact the manufacturer immediately.
- These instructions do not purport to cover all details or variations in equipment nor to provide every possible contingency to meet in connection with installation, operation, or maintenance. Should further information be desired or should particular problems arise which are not covered sufficiently for the purchaser's or owner's purposes, contact the manufacturer.



T8 LED READY STRIP LIGHT FIXTURES

WARNING, CAUTION, SAFETY AND INSTALLATION INSTRUCTIONS

⚠ ADVERTENCIA

- Antes de instalar, reparar o realizar el mantenimiento de rutina de este equipo, siga estas precauciones generales.
- Para reducir el riesgo de muerte, lesiones personales o daños a la propiedad por fuego, descarga eléctrica, caída de piezas, cortes / abrasiones y otros peligros, lea todas las advertencias y instrucciones incluidas con y en la caja del dispositivo y todas las etiquetas del dispositivo.
- Se requiere una conexión a tierra adecuada para garantizar la seguridad.
- Se debe apagar la energía en el disyuntor antes de la instalación o el mantenimiento.
- Este producto debe ser instalado de acuerdo con el código de instalación aplicable por una persona familiarizada con la construcción y operación del producto y los peligros involucrados.
- Utilice guantes y protección para los ojos en todo momento durante la instalación, el servicio o el mantenimiento de la luminaria, y evite la exposición directa de los ojos a la fuente de luz mientras está encendida.
- Para evitar daños o abrasiones en el cableado, no exponga el cableado a bordes de láminas de metal u otros objetos afilados.
- No instale un producto dañado. Inspeccione la luminaria en busca de daños que puedan haber ocurrido durante el tránsito. Si está dañado, comuníquese con el fabricante de inmediato.
- Estas instrucciones no pretenden cubrir todos los detalles o variaciones en el equipo ni proporcionar todas las posibles contingencias a cumplir en relación con la instalación, operación o mantenimiento. Si desea obtener más información o si surgen problemas particulares que no están suficientemente cubiertos para los propósitos del comprador o propietario, comuníquese con el fabricante.