





GE
Lighting

19873 - 35PAR36/H/SP5

GE PAR36 - Very Narrow Spot

- Standard Halogen - Crisp, white light

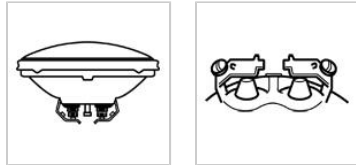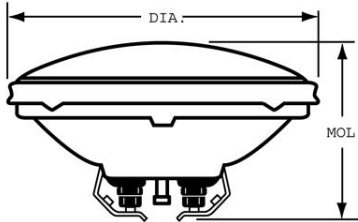

CAUTIONS & WARNINGS

Caution

- Lamp may shatter and cause injury if broken
 - Do not use lamp if outer glass is scratched or broken.

Warning

- Risk of Burn
 - Allow lamp/fixture to cool before handling.
- A damaged lamp emits UV radiation which may cause eye/skin injury
 - Turn power off if glass bulb is broken. Remove and dispose of lamp.
- Pressurized lamp--unexpected rupture may cause injury, fire, or property damage
 - Do not exceed 110% of rated voltage.
 - Do not use lamp if outer glass is scratched or broken.
- Risk of Fire
 - Keep combustible materials away from lamp.
 - Use in fixture rated for this product.

GENERAL CHARACTERISTICS

Lamp Type	Sealed Beam - PAR
Bulb	PAR36
Base	Screw Terminals
Filament	C-6
Rated Life (NOM)	4000.0 h
Primary Application	Very Narrow Spot

PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	250.0
Beam Spread (NOM)	5.0 °
Beam Spread - Horizontal	8.0 - 10.0 °
Beam Spread - Vertical	6.0 - 10.0 °
Center Beam Candlepower (CBCP) (NOM)	25000.0
Color Temperature (NOM)	3050.0 K
Max. Beam Candlepower (MBCP) (MAX)	25000.0
Nominal Initial Lumens per Watt (NOM)	7.142857

ELECTRICAL CHARACTERISTICS

Wattage (NOM)	35.0
Voltage (NOM)	12.0

DIMENSIONS

Maximum Overall Length (MOL) (NOM)	2.750 in(69.8 mm)
Bulb Diameter (DIA) (NOM)	4.500 in(114.3 mm)

PRODUCT INFORMATION

Product Code	19873
Description	35PAR36/H/SP5
Standard Package	Case
Standard Package GTIN	00043168198738
Standard Package Quantity	12
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168970273