



PL-T Triple 4-Pin Base

PL-T 32W/827/A/4P/ALTO

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

Product data

| General Information | |
|------------------------------------|---------------------|
| Cap-Base | GX24Q-3 [GX24q-3] |
| LSF Preheat 2000 h Rated | 99 % |
| LSF Preheat 4000 h Rated | 98 % |
| LSF Preheat 6000 h Rated | 97 % |
| LSF Preheat 8000 h Rated | 90 % |
| | |
| Light Technical | |
| Color Code | 827 [CCT of 2700K] |
| Initial lumen (Nom) | 2250 lm |
| Luminous Flux (Rated) (Nom) | 2250 lm |
| Color Designation | Incandescent White |
| Chromaticity Coordinate X (Nom) | 453 |
| Chromaticity Coordinate Y (Nom) | 418 |
| Correlated Color Temperature (Nom) | 2700 K |
| Luminous Efficacy (rated) (Nom) | 68.2 lm/W |
| Color Rendering Index (Nom) | 82 |
| LLMF 2000 h Rated | 92 % |
| LLMF 4000 h Rated | 88 % |
| LLMF 6000 h Rated | 85 % |
| LLMF 8000 h Rated | 84 % |


| LLMF 12000 h Rated | 81 % |
|-------------------------------|------------------------|
| | |
| Operating and Electrical | |
| Power (Rated) (Nom) | 33.0 W |
| Lamp Current (Nom) | 0.320 A |
| | |
| Temperature | |
| Design Temperature (Nom) | 28 °C |
| | |
| Controls and Dimming | |
| Dimmable | Yes |
| | |
| Mechanical and Housing | |
| Cap-Base Information | 4P |
| | |
| Approval and Application | |
| Energy Efficiency Label (EEL) | B |
| Mercury (Hg) Content (Nom) | 1.4 mg |
| | |
| Product Data | |
| Order product name | PL-T 32W/827/A/4P/ALTO |

PL-T Triple 4-Pin Base

| | |
|---------------------------------|--------------|
| EAN/UPC - Product | 046677384432 |
| Order code | 458281 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 10 |
| Material Nr. (12NC) | 927911082750 |

| | |
|--------------------|------------------------|
| Net Weight (Piece) | 70.000 g |
| ILCOS Code | FSM-32/27/1B-E-GX24q=3 |


Dimensional drawing




PL-T ALTO 32W/827/4P A

| Product | D (max) | A (max) | B (max) | C (max) |
|------------------------|---------|---------|----------|----------|
| PL-T 32W/827/A/4P/ALTO | 41 mm | 98.7 mm | 123.0 mm | 138.7 mm |

Photometric data

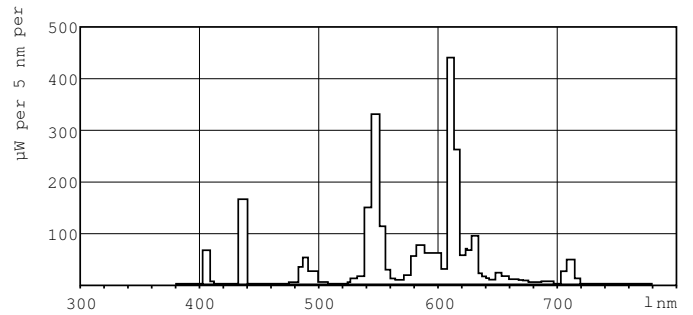

Lightcolor /827

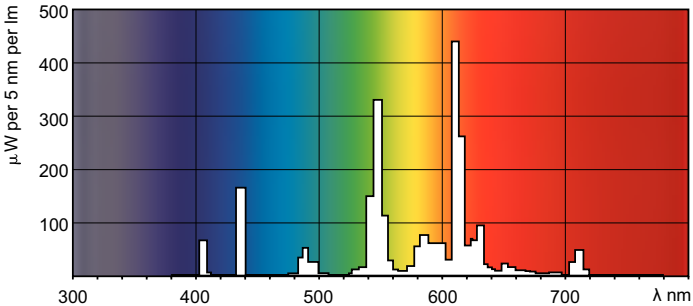

Lightcolor /827

