


USHIO





CHARACTERISTICS & SPECIFICATIONS

12V EUROSTAR™ REFLEKTO™

C-8 Filament
Universal Burn Position

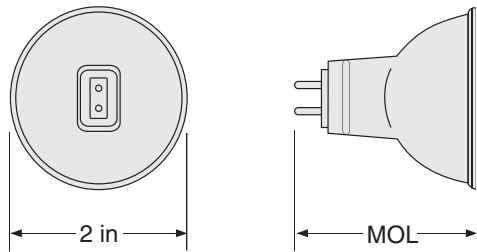

GU5.3

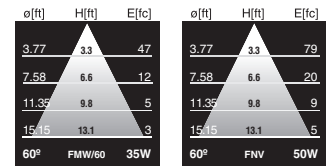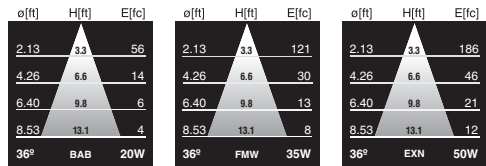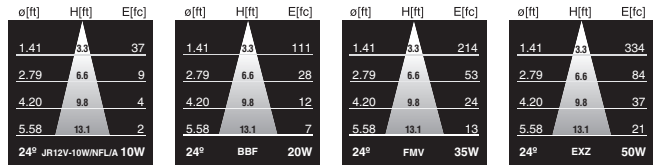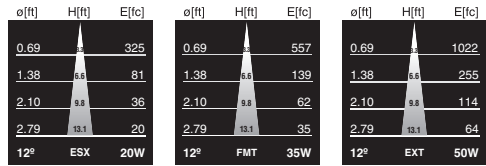

Watts (W)	Ushio Ordering Code	Ushio Lamp Code	MOL (in)	Color Temp (K)	Beam Angle	Beam Spread	Luminous Intensity (cd)	Avg Life (h)
10	1002143	JR12V-10W/NFL24/A, EUROSTAR-REFLEKTO	1.77	2800	24°	Narrow Flood	400	1200
20	1000368	ESX/C/A, EUROSTAR-REFLEKTO	1.77	2950	12°	Spot	3500	3500
20	1000369	ESX/C/A/FG, EUROSTAR-REFLEKTO	1.78	2950	12°	Spot	3500	3500
20	1000033	BBF/C/A/FG, EUROSTAR-REFLEKTO	1.78	2950	24°	Narrow Flood	1200	3500
20	1000009	BAB/C/A, EUROSTAR-REFLEKTO	1.77	2950	36°	Flood	600	3500
20	1000010	BAB/C/A/FG, EUROSTAR-REFLEKTO	1.78	2950	36°	Flood	600	3500
35	1000549	FMT/C/A, EUROSTAR-REFLEKTO	1.77	2950	12°	Spot	6000	3500
35	1000550	FMT/C/A/FG, EUROSTAR-REFLEKTO	1.78	2950	12°	Spot	6000	3500
35	1000556	FMV/C/A, EUROSTAR-REFLEKTO	1.77	2950	24°	Narrow Flood	2300	3500
35	1000557	FMV/C/A/FG, EUROSTAR-REFLEKTO	1.78	2950	24°	Narrow Flood	2300	3500
35	1000570	FMW/C/A, EUROSTAR-REFLEKTO	1.77	2950	36°	Flood	1300	3500
35	1000571	FMW/C/A/FG, EUROSTAR-REFLEKTO	1.78	2950	36°	Flood	1300	3500
35	1001682	FMW/60/C/A, EUROSTAR-REFLEKTO	1.77	2950	60°	Wide Flood	510	3500
35	1001683	FMW/60/C/A/FG, EUROSTAR-REFLEKTO	1.78	2950	60°	Wide Flood	510	3500
50	1000417	EXT/C/A, EUROSTAR-REFLEKTO	1.77	3000	12°	Spot	11000	3500
50	1000418	EXT/C/A/FG, EUROSTAR-REFLEKTO	1.78	3000	12°	Spot	11000	3500
50	1000427	EXZ/C/A, EUROSTAR-REFLEKTO	1.77	3000	24°	Narrow Flood	3600	3500
50	1000428	EXZ/C/A/FG, EUROSTAR-REFLEKTO	1.78	3000	24°	Narrow Flood	3600	3500
50	1000402	EXN/C/A, EUROSTAR-REFLEKTO	1.77	3000	36°	Flood	2000	3500
50	1000403	EXN/C/A/FG, EUROSTAR-REFLEKTO	1.78	3000	36°	Flood	2000	3500
50	1000590	FNV/C/A, EUROSTAR-REFLEKTO	1.77	3000	60°	Wide Flood	850	3500
50	1000591	FNV/C/A/FG, EUROSTAR-REFLEKTO	1.78	3000	60°	Wide Flood	850	3500