



# ADVENTURE POWER<sup>®</sup>

UPG No. 41544

## 12N12A-4A-1

### Conventional Battery


This battery is specially designed as a high-performance battery used for motorcycles. The characteristics are high cranking AMPS, high vibration resistant and long cycle life.

#### Specification

<b>Nominal Voltage</b>	12 Volts
<b>Nominal Capacity (10H-R)</b>	12 Ah
<b>Approximate Weight (With Acid)</b>	7.72 lbs. (3.5 kgs)
<b>Recommended Maximum Charging Current Limit</b>	3.6A
<b>Equalization and Cycle Service</b>	14.8 VDC/unit Average at 25°C
<b>Cycle Life (JIS D 5302:2004)</b>	250
<b>Terminal Type</b>	F



#### Physical Dimensions: in (mm)

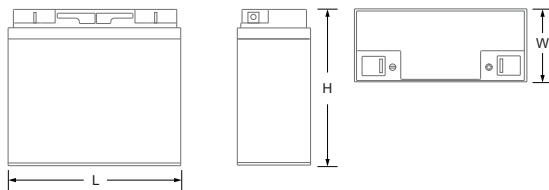

**L:** 5.24" (133mm) **H:** 6.30" (160mm) **W:** 3.15" (80mm)  
All data subject to change without notice.


#### Terminal Configuration



#### Polarity



#### Exhaust



Front



Side



Terminals

#### Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle.
- Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

#### Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than 4 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the Energizer<sup>®</sup> Maintainer 4000 battery charger.
- This charger/ maintainer can remain connected to the battery indefinitely.

[www.upgi.com](http://www.upgi.com)