



ADVENTURE POWER[®]

UPG No. 41547

12N24-3
Conventional Battery


This battery is specially designed as a high-performance battery used for motorcycles. The characteristics are high cranking AMPS, high vibration resistant and long cycle life.

Specification

Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	24 Ah
Approximate Weight (With Acid)	16.09 lbs. (7.3 kgs)
Recommended Maximum Charging Current Limit	7.2A
Equalization and Cycle Service	14.8 VDC/unit Average at 25°C
Cycle Life (JIS D 5302:2004)	225
Terminal Type	C



Physical Dimensions: in (mm)

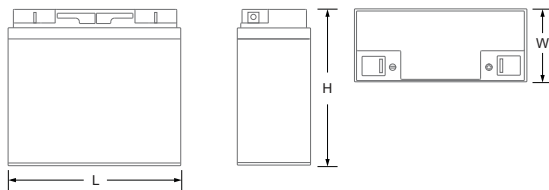

L: 7.24" (184mm) **H:** 6.93" (176mm) **W:** 4.88" (124mm)
All data subject to change without notice.

Terminal Configuration



Polarity



Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle.
- Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than 7 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the Energizer[®] Maintainer 4000 battery charger.
- This charger/ maintainer can remain connected to the battery indefinitely.

www.upgi.com

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@upgi.com