



# ADVENTURE POWER<sup>®</sup>

UPG No. 41522

## 6N6-1D Conventional Battery


This battery is specially designed as a high-performance battery used for motorcycles. The characteristics are high cranking AMPS, high vibration resistant and long cycle life.

### Specification

<b>Nominal Voltage</b>	6 Volts
<b>Nominal Capacity (10H-R)</b>	6 Ah
<b>Approximate Weight (With Acid)</b>	2.43 lbs. (1.1kgs)
<b>Recommended Maximum Charging Current Limit</b>	1.8A
<b>Equalization and Cycle Service</b>	7.4 VDC/unit Average at 25°C
<b>Cycle Life (JIS D 5302:2004)</b>	250
<b>Terminal Type</b>	M




### Physical Dimensions: in (mm)

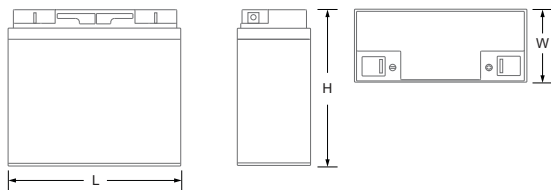


**L:** 3.90" (99mm) **H:** 4.37" (111mm) **W:** 2.24" (56.9mm)  
All data subject to change without notice.

### Terminal Configuration



### Polarity



### Exhaust



Front



Side



Terminals

### Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle.
- Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

### Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than 2 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the 6V 500mah dual stage regulated battery charger.
- This charger/ maintainer can remain connected to the battery indefinitely.

[www.upgi.com](http://www.upgi.com)