



ADVENTURE POWER[®]

UPG No. 42517

UB10L-B2 Conventional Battery


This battery is specially designed as a high-performance battery used for motorcycles. The characteristics are high cranking AMPS, high vibration resistant and long cycle life.

Specification

Nominal Voltage	12 Volts
Nominal Capacity (10H-R)	11 Ah
Approximate Weight (With Acid)	7.28 lbs. (3.3 kgs)
Recommended Maximum Charging Current Limit	3.3A
Equalization and Cycle Service	14.8 VDC/unit Average at 25°C
Cycle Life (JIS D 5302:2004)	225
Terminal Type	D



Physical Dimensions: in (mm)

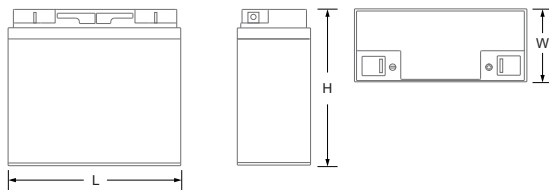

L: 5.28" (134mm) **H:** 5.71" (145mm) **W:** 3.54" (90mm)
All data subject to change without notice.

Terminal Configuration



Polarity



Exhaust



Front



Side



Terminals

Filling Instructions

- Before filling, ensure your new battery is the correct size for your vehicle.
- Once the battery is filled, it cannot be returned to vendor.
- Only use the acid pack that comes with your battery.
- Fill all cells to the "FULL" mark and wait 30 minutes.
- After 30 minutes, any cell that has settled below the "FULL" mark should be topped off to the "FULL" mark.
- Replace the sealer caps before charging the battery.

Charging Instructions

- Charge the battery fully before installing.
- Never charge this battery with a charger that delivers more than 3 amps of current. Larger chargers will harm the battery.
- For optimum performance, UPG recommends charging and maintaining with the Energizer[®] Maintainer 2000 battery charger.
- This charger/ maintainer can remain connected to the battery indefinitely.

www.upgi.com

1720 Hayden Drive | Carrollton, Texas 75006 | P 469.892.1122 | T 866.892.1122 | F 469.892.1123 | sales@upgi.com

VR110509