

# DULUX® S ECOLOGIC® Compact Fluorescent Lamps



SYLVANIA DULUX S ECOLOGIC compact fluorescent lamps are an energy saving option over incandescent lamps. These lamps provide even light distribution and similar light output. When compared to a 90 Watt incandescent the 13 Watt DULUX S ECOLOGIC lamp will have up to 75% energy savings and ten times longer life.

DULUX S ECOLOGIC lamps are designed to meet the Federal Toxicity Characteristic Leaching Procedure (TCLP) criteria for classification as non-hazardous waste in most states\* and is RoHS compliant.

\* Always check your local and state regulations.

## Key Features & Benefits

- High Efficacy
  - Uses less energy than an incandescent lamp of comparable lumen output
- Reduced greenhouse gas and mercury emissions from power generation compared to incandescent lamps
- Long 10,000 hour average rated life
  - Reduces relamping requirements and related costs
- Two-pin lamps with integral starter
- 82 CRI
- 10,000-hour average rated life
- Lead-free glass
- TCLP and RoHS compliant

ECOLOGIC® is a comprehensive program of OSRAM SYLVANIA focused on addressing environmental issues at all stages of lamp life.



This light source meets restrictions on hazardous substances.



## Product Offering

Lamp Type	Watts	CCT
CF5DS/800/ECO	5W	2700K, 4100K
CF7DS/800/ECO	7W	2700K, 3500K, 4100K, 5000K
CF9DS/800/ECO	9W	2700K, 3500K, 4100K, 5000K
CF13DS/800/ECO	13W	2700K, 3500K, 4100K, 5000K

## Application Information

### Applications

Down lights  
Exit signs  
Surface mounted fixtures  
Task lighting  
Wall sconces

### Application Notes

1. 2-Pin, preheat lamps designed for magnetic ballast operation.
2. Minimum starting temperatures available on next page.
3. Rule of thumb: to estimate the appropriate compact fluorescent lamp wattage, divide the incandescent wattage by 4.
4. Lamps manufactured to prevent socket deformation due to overheating when operated on magnetic ballasts of any supply voltage.



## Ordering Information

Item Number	Ordering Abbreviation	NEMA Generic Designation	Base	Watts	Volts	Amps	Initial Lumens	Mean Lumens	Avg. Rated Life (hrs.)*	CRI	Min. Starting Temp. (F/C)**
21279	CF5DS/827/ECO	CF5W/G23/827	G23	5	35	.180	230	210	10,000	82	-22°/-30°
21278	CF5DS/841/ECO	CFT5W/G23/841	G23	5	35	.180	230	210	10,000	82	-22°/-30°
21277	CF7DS/827/ECO	CFT7W/G23/827	G23	7	45	.180	400	360	10,000	82	-4°/-20°
21276	CF7DS/835/ECO	CFT7W/G23/835	G23	7	45	.180	400	360	10,000	82	-4°/-20°
21274	CF7DS/841/ECO	CFT7W/G23/841	G23	7	45	.180	400	360	10,000	82	-4°/-20°
21275	CF7DS/850/ECO	CFT7W/G23/850	G23	7	45	.180	400	360	10,000	82	-4°/-20°
21272	CF9DS/827/ECO	CFT9W/G23/827	G23	9	59	.180	580	520	10,000	82	14°/-10°
21273	CF9DS/835/ECO	CFT9W/G23/835	G23	9	59	.180	580	520	10,000	82	14°/-10°
21270	CF9DS/841/ECO	CFT9W/G23/841	G23	9	59	.180	580	520	10,000	82	14°/-10°
21271	CF9DS/850/ECO	CFT9W/G23/850	G23	9	59	.180	580	520	10,000	82	14°/-10°
21136	CF13DS/827/ECO	CFT13W/GX23/827	GX23	13	59	.180	800	720	10,000	82	14°/-10°
21133	CF13DS/830/ECO	CFT13W/GX23/830	GX23	13	59	.180	800	720	10,000	82	14°/-10°
21137	CF13DS/835/ECO	CFT13W/GX23/835	GX23	13	59	.180	800	720	10,000	82	14°/-10°
21134	CF13DS/841/ECO	CFT13W/GX23/841	GX23	13	59	.180	800	720	10,000	82	14°/-10°
21135	CF13DS/850/ECO	CFT13W/GX23/850	GX23	13	59	.180	800	720	10,000	82	14°/-10°

\*Based on 3 hrs per start


\*\*At rated line voltage

## Ordering Guide

CF	9	DS	/	8	27	/	ECO
Compact Fluorescent	Wattage: 5, 7, 9 and 13 watts	DULUX® Single		8 = 82 CRI	27 = 2700K 30 = 3000K 35 = 3500K 41 = 4100K 50 = 5000K		ECOLOGIC®


## Lamp Dimensions

Ordering Abbreviation	(A) MOL [in (mm)]	(B) Max. Base Face to Top of Lamp [in (mm)]	(C) Max. Base Length [in (mm)]	(D) Max. Base Width [in (mm)]	(E) Max. Guide Post Length [in (mm)]
CF5DS	4.21 (107)	3.26 (83.0)	1.28 (32.5)	0.83 (21.0)	0.9 (23)
CF7DS	5.31 (135)	4.41 (112.0)	1.28 (32.5)	0.83 (21.0)	0.9 (23)
CF9DS	6.50 (165)	5.60 (142.0)	1.28 (32.5)	0.83 (21.0)	0.9 (23)
CF13DS	7.09 (180)	6.10 (155.0)	1.28 (32.5)	0.83 (21.0)	0.9 (23)




## Technical Information


Lumen Maintenance Curve  
DULUX S, S/E, D, D/E, T & T/E

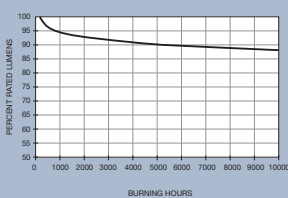


DULUX 827

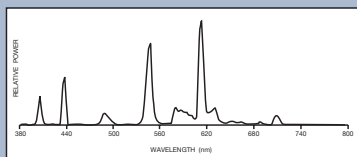


DULUX 830

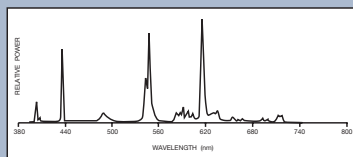


Typical Fluorescent Lamp Mortality

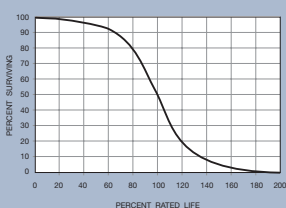

DULUX 835

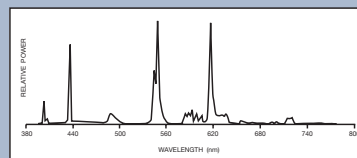

DULUX 841

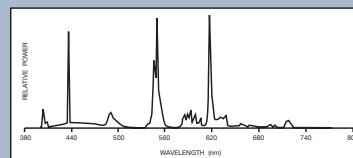

SYLVANIA, QUICKSENSE and QUICK 60+ are registered trademarks of OSRAM SYLVANIA Inc.  
SEE THE WORLD IN A NEW LIGHT is a registered trademark of OSRAM SYLVANIA Inc.  
QUICKTRONIC and DULUX are registered trademarks of OSRAM AG.  
Specifications subject to change without notice.

## Specification Data

Fixture Description
Project/Job
SYLVANIA lamp
SYLVANIA ballast
Date
Type:

## Sample Specification

Lamp(s) shall be (a) DULUX S ECOLOGIC (CF5/ECO, CF7/ECO, CF9/ECO, CF13/ECO) compact fluorescent 2-pin lamp(s). Lamp(s) shall have a correlated color temperature of (2700K, 3000K, 3500K, 4100K or 5000K). Lamp(s) shall be TCLP and RoHS compliant.

### United States

#### OSRAM SYLVANIA

100 Endicott Street  
Danvers, MA 01923

### Trade

Phone: 1-800-255-5042  
Fax: 1-800-255-5043

### National Accounts

Phone: 1-800-562-4671  
Fax: 1-800-562-4674

### OEM/Special Markets

Phone: 1-800-762-7191  
Fax: 1-800-762-7192

### Display/Optic

Phone: 1-888-677-2627  
Fax: 1-800-762-7192

### SYLVANIA Lighting Services

Phone: 1-800-323-0572  
Fax: 1-800-537-0784

### Canada

#### OSRAM SYLVANIA LTD.

2001 Drew Road  
Mississauga, ON L5S 1S4

### Trade

Phone: 1-800-263-2852  
Fax: 1-800-667-6772

### OEM/Special Markets/Display/Optic

Phone: 1-800-265-2852  
Fax: 1-800-667-6772

### SYLVANIA Lighting Services

Phone: 1-800-663-4268  
Fax: 1-866-239-1278

### Mexico

#### OSRAM MEXICO

Headquarters  
Tultitlan/Edo de Mexico  
011-52-55-58-99-18-50

www.sylvania.com