



SPECIFICATION SHEET : TC11200350-15C

This Is An Original Product From Fulham Co., Inc



Description: Independent direct current power supply. High efficiency and Reduced weight and size. Constant current output. Power output 8 to 15 Watts.


This Driver Will Operate Following LED modules:

Any LED Module designed to accept constant current input up to 350mA.

ELECTRICAL DATA

INPUT VOLT	120V ± 10%, 50/60Hz
POWER FACTOR	>0.50
EFFICIENCY	>80% @ Full Load
CURRENT PROTECTION	Yes
CONSTANT CURRENT, VOLTAGE OR POWER	Constant Current
OUTPUT CURRENT	0.35A
OUTPUT VOLTAGE	24-50V
MINIMUM LOAD	8W
OUTPUT SHORT CIRCUIT PROTECTION	Yes
OUTPUT OPEN CIRCUIT PROTECTION	Yes
OUTPUT TO GROUND SHORT PROTECTION	Yes
OVER LOAD PROTECTION	Yes
EMI	FCC Part 15, Class A
MAX CASE HOT SPOT TEMPERATURE	75°C
OPERATING TEMPERATURE	-20°C to 40°C
SERVICE LIFE	50,000 Hours
APPROVALS/CLASS	UR Class 2, Damp Location; cUR


MECHANICAL DATA

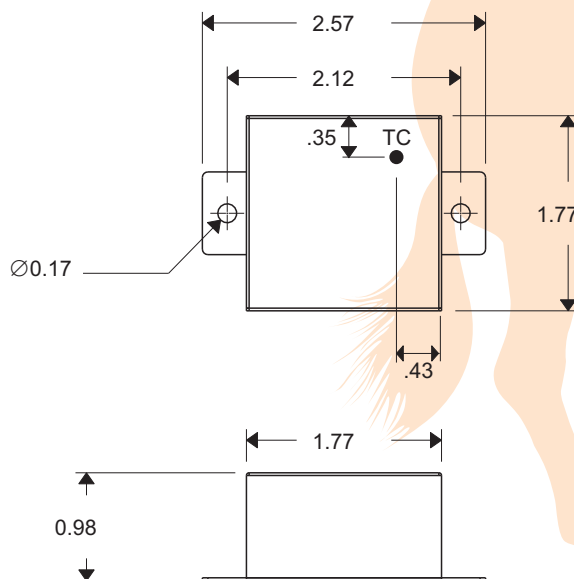

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE
LENGTH - INCHES	12 ± 1"	12 ± 1"	12 ± 1"	12 ± 1"

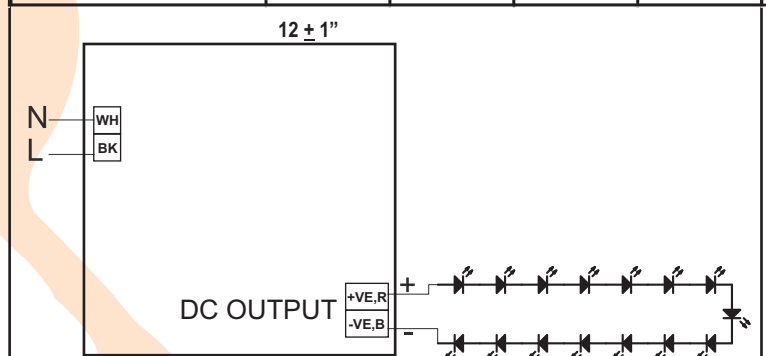

Note: This LED Driver must be grounded.

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.