
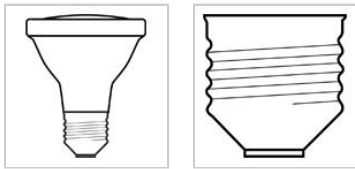


## 29485 - CMH20PAR20/SP

GE ConstantColor® PulseArc® CMH® Ceramic Metal Halide PAR20

a product of  
**ecomagination**

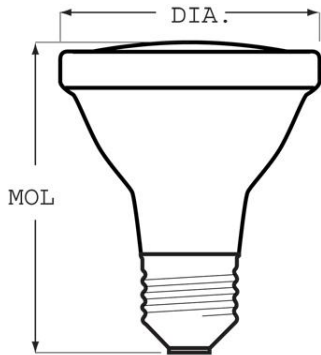

### CAUTIONS & WARNINGS

R- WARNING: This lamp can cause serious skin burn and eye inflammation from shortwave ultraviolet radiation if outer envelope of the lamp is broken or punctured, and the arc tube continues to operate. Do not use where people will remain for more than a few minutes unless adequate shielding or other safety precautions are used. Certain types of lamps that will automatically extinguish when the outer envelope is broken or punctured are commercially available. Visit the FDA website for more information: <http://www.fda.gov/cdrh/radhealth/products/urburns.html>

#### Caution

- Lamp may shatter and cause injury if broken
  - Do not use lamp if outer glass is scratched or broken.

#### Warning

- Risk of Electric Shock
  - Do not use where directly exposed to water or outdoors without an enclosed fixture.
  - Turn power off before inspection, installation or removal.
- Risk of Fire
  - Keep combustible materials away from lamp.
  - Use fused or thermally protected ballast - see instructions.
  - Use in fixture rated for this product.
- Risk of Burn
  - Allow lamp to cool before handling.
  - Do not turn on lamp until fully installed.
- Unexpected lamp rupture may cause injury, fire, or property damage
  - Do not exceed rated voltage.
  - Do not store flammable materials near/below lamp.
  - Do not turn on lamp until fully installed.
  - Do not use beyond rated life.
  - Do not use lamp if outer glass is scratched or broken.
  - Do not use where directly exposed to water or outdoors without an enclosed fixture.
  - Use only properly rated ballast.

### GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - Ceramic Metal Halide
Bulb	PAR20
Base	Medium Screw (E26)
Wattage	20
Rated Life	12000 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
LEED-EB MR Credit	183 picograms Hg per mean lumen hour
Additional Info	UV control

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	1000
Nominal Initial Lumens per Watt	50
Beam Spread	8 °
Center Beam Candlepower (CBCP)	13000
Color Temperature	3000 K
Color Rendering Index (CRI)	81

### ELECTRICAL CHARACTERISTICS

Burn Position	Universal burning position
Warm Up Time to 90% (MAX)	2 min
Hot Restart Time to 90% (MIN)	10 min
Hot Restart Time to 90% (MAX)	15 min

### DIMENSIONS

Maximum Overall Length (MOL)	3.6 cm
Nominal Length	3.5 cm
Bulb Diameter (DIA)	2.5 cm
Bulb Diameter (DIA) (MAX)	2.5 cm

### PRODUCT INFORMATION

Product Code	29485
Description	CMH20PAR20/SP
ANSI Code	M156
Standard Package	Case
Standard Package GTIN	10043168294857
Standard Package Quantity	15
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	15
UPC	043168294850