369-402a 1.25.11

# Skylark Contour™ Incandescent

Captive knob slide dimmer with an easy to use rocker switch.

# **Product Family Features**

- On / off rocker switch with a captive linear-slide dimmer for a standard designer wallplate opening
- Switch returns light to previous level
- Uses standard single-pole and 3-way wiring for easy installation in any home
- eco-dim® model guarantees at least 15% energy savings and 3x bulb life compared to a standard switch
- eco-minder® model features an LED that turns from red to green when 15% energy savings is achieved. LED brightens as you dim further and more energy is saved
- C◆L™ model provides reliable dimming performance for dimmable CFL and LED bulbs (Please see separate C◆L Specification Submittal)
- 100% factory tested
- Coordinating Claro® and Stainless Steel wallplates available separately
- Available in all Claro gloss colors



\* Faceplate sold separately

#### **SELUTRON** SPECIFICATION SUBMITTAL

WEST IST OF ESTITION SODWITTAL		
Job Name:	Model Numbers:	
Job Number:		

Page

369-402a 1.25.11

# **Specifications**

## **Regulatory Approvals**

 UL Listed to US and Canadian safety standards UL1472 / CSA C22.2 184.1

## **Power and Ratings**

- 120 V~ 60 Hz
- 600 W Incandescent/Halogen

#### **Environment**

- For indoor use only.
- Operating temperatures 32 °F (0 °C) to 104 °F (40 °C).


#### Performance

- Power-failure memory
- Captive linear slider
- Electrostatic discharge tested
- Precise color matching
- Mechanical air-gap switch to disconnect load power

### **Dimmer Capacity Chart**

Dimmer Rating	No sides removed	1 side removed	2 sides removed
600 W	600 W max	500 W max	400 W max

#### **Dimensions**

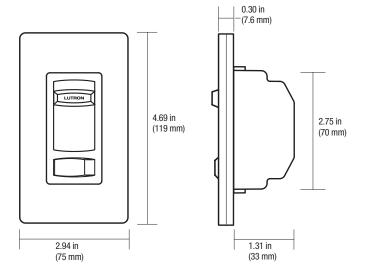

#### **Available Model Numbers**

Skylark Contour Dimmers

Single-pole 600W CT-600P- $CC^2$  3-way<sup>1</sup> 600W CT-603P- $CC^2$ 

Skylark Contour eco-dim Dimmers

Single-pole / 3-way<sup>1</sup> 600W CT-603PG-DD<sup>3</sup>

Skylark Contour eco-minder Dimmers

Single-pole / 3-way<sup>1</sup> 600W CT-603PI-DD<sup>3</sup>

#### Notes:

- <sup>1</sup> For 3-way and 4-way switching, use with Claro switches or other mechanical switches.
- <sup>2</sup> <u>CC</u> Gloss color codes, see section "Standard Colors and Finishes" below
- <sup>3</sup> <u>DD</u> eco-dim and eco-minder dimmers are only available in white, ivory, almond and light almond finishes.

#### Standard Colors and Finishes

#### **Gloss Finishes**

Add color suffix to model #

Example: CT-600P-WH

WH	White
IV	lvory
AL	Almond
LA	Light Almond
GR	Gray
BR	Brown
BL	Black

### Warranty

1 Year Limited

#### **SULTRON** SPECIFICATION SUBMITTAL


** LOTION CODMITTE		ı ago	
Job Name:	Model Numbers:		
Job Number:			

Page


369-402a 1.25.11

# Wiring Diagrams


# Single-Pole Wiring




## Single-Pole Wiring for CT-600P



# 3-Way Wiring

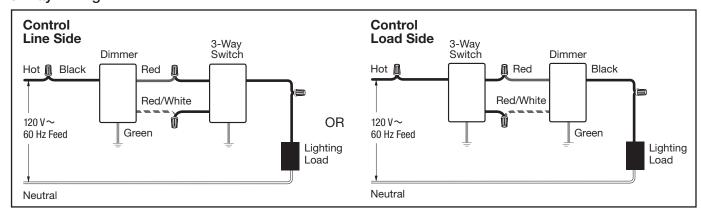

## 4-Way Wiring

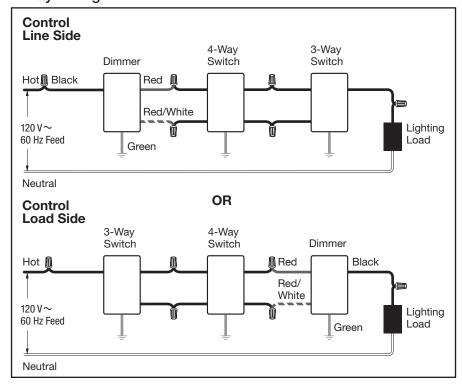

## **LUTRON** SPECIFICATION SUBMITTAL

Job Name: Model Numbers:

Job Number:

Page