



GE  
Lighting



## 18557 - F13DBXT4/SPX27

GE Biax® T4 - Facilities; Retail Display; Hospitality; Office; Restaurant; Warehouse

This product is no longer manufactured.



High Color Rendering  
Energy Savings




### CAUTIONS & WARNINGS

#### Caution

- Lamp may shatter and cause injury if broken
- Remove and install by grasping only plastic portion of the lamp.

### GRAPHS & CHARTS

#### Graphs\_Spectral Power Distribution

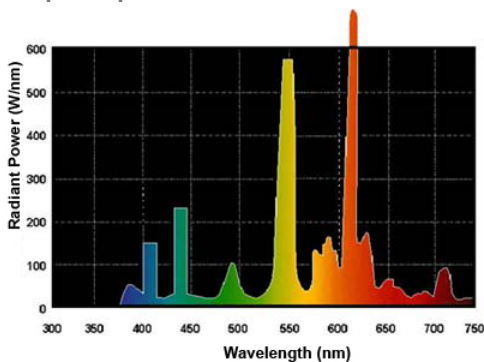

### NOTES

- Based on 60Hz reference circuit.
- Fluorescent lamp lumens decline during life

### GENERAL CHARACTERISTICS

Lamp Type	Compact Fluorescent - Plug-In
Bulb	T4
Base	G24d-1
Equivalent Wattage (NOM)	60.0 W
Rated Life (NOM)	10000.0 h
Starting Temperature (MIN)	-15.0 °C
Cathode Resistance (NOM)	10.5 Ohm
Mercury Content (NOM)	3.0 mg
Picograms of Mercury (NOM)	397.351 pg
Primary Application	Facilities;Retail Display;Hospitality;Office;Restaurant;Warehouse

### PHOTOMETRIC CHARACTERISTICS

Initial Lumens (NOM)	900.0
Mean Lumens (NOM)	755.0
Nominal Initial Lumens per Watt (NOM)	69.23077
Color Temperature (NOM)	2700.0 K
Color Rendering Index (CRI) (NOM)	82.0

### ELECTRICAL CHARACTERISTICS

Wattage (NOM)	13.0
Voltage (NOM)	91.0
Open Circuit Voltage Across Starter (MIN)	198.0 V
Lamp Current (NOM)	0.175 A
Current Crest Factor (MAX)	1.7
Supply Current Frequency (NOM)	60.0 Hz

### DIMENSIONS

Maximum Overall Length (MOL) (NOM)	5.240 in(133.1 mm)
Nominal Length (NOM)	5.300 in(134.6 mm)
Base Face to Top of Lamp (NOM)	4.370 in(111.0 mm)

### PRODUCT INFORMATION

Product Code	18557
Description	F13DBXT4/SPX27
ANSI Code	60901-IEC-0513-1
Standard Package	BUNDLE
Standard Package GTIN	30043168185579
Standard Package Quantity	50
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	50
UPC	043168185578