

PRELIMINARY



Soraa Internal Report - IES LM79-08

Test results reported for:

Customer Reference P/N: **SR111-18-36D-827-03**

Manufacturing P/N: SR111-18-36D-827-03

Soraa AR111, G53/12V, 2700K, 80CRI, 18.5W, 36degree

Relevant Standards

IES LM-79


ANSI C78.377

IES PR-16

Soraa Lamp Lab

1.0 Description of test sample

Customer reference ID	SR111-18-36D-827-03
Manufacturer reference ID	SR111-18-36D-827-03
Lamp description	Primium 2700K 80CRI 18.5W 36 degree
Rated voltage	AC 12V
Rated power	18.5W
Nominal CCT	2700K

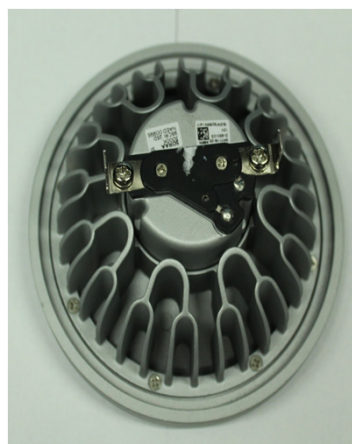


2.0 Results - Sphere Measurements

Test conditions	
Orientation	Horizontal
Stabilization time (min)	50-55
Correction factor applied	Self absorption correction
Sphere geometry	65" Sphere
	95% coating reflectance
	2pi geometry
Ambient temperature (°C)	25±1


Instrument				
	Instrument	Manufacture	Model	
Photometric	Spectrometer	Instrument systems	CAS 140T	
	Integrating sphere	Labsphere	65"	
	Standard lamp	Labsphere	CSFS-1400 lamp	
Electrical instrument	Power supply for standard lamp	Labsphere	LPS-150-0268	
	Power supply for aux lamp	Labsphere	LPS-100-0833	
	Power supply for test lamps	APT	Variplus 105	
	Power meter for test lamps	Chroma	66202	
Thermometer	Digital multimeter	YOKOGAWA	TY720	

Measurement results				
	Photometric		Electrical	
Total lumen (lm)	1121		Input voltage (V)	119.6
Luminous efficacy (lm/W)	61		Current (A)	0.156
Chromaticity coordinates	$u' = 0.2631$		Power (W)	18.5
	$v' = 0.5282$		pf	0.989
	$x = 0.4619$			
	$y = 0.4121$			
CCT (K)	2683			
CRI	83			
R9	8			
Duv				

Spectral power distribution

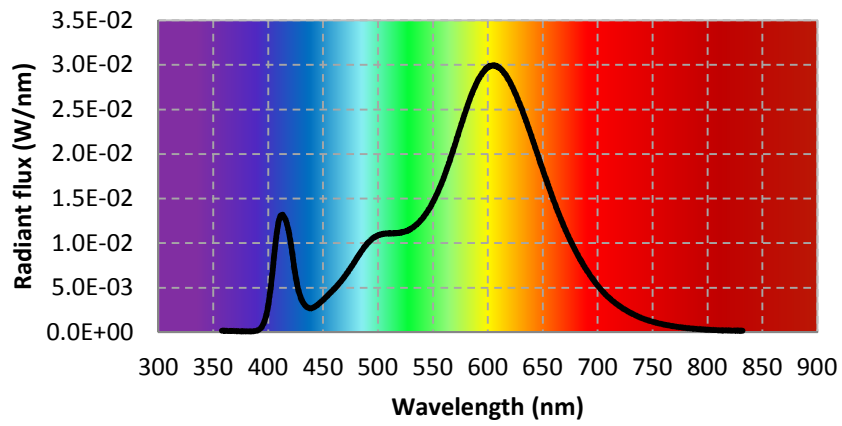


Chromaticity on CIE1931

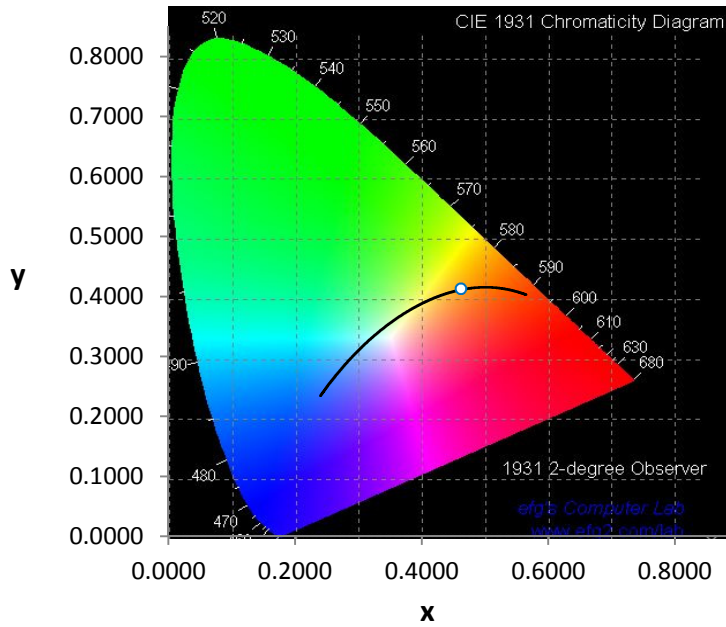

CRI

R1	82
R2	94
R3	88
R4	81
R5	85
R6	97
R7	79
R8	56
R9	7
R10	91
R11	82
R12	91
R13	85
R14	93
Ra	83

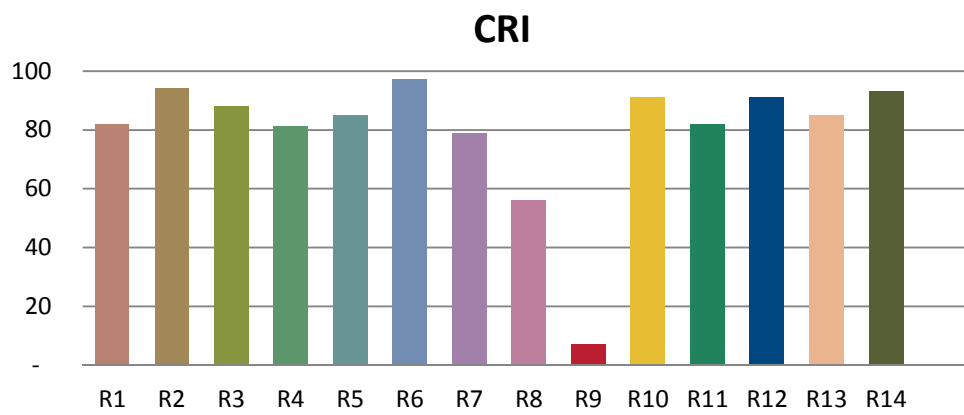

WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)
380	1.17E-04	421	9.65E-03	462	5.10E-03	503	1.10E-02	544	1.34E-02
381	1.09E-04	422	8.82E-03	463	5.27E-03	504	1.10E-02	545	1.36E-02
382	1.14E-04	423	7.92E-03	464	5.40E-03	505	1.10E-02	546	1.38E-02
383	1.08E-04	424	7.06E-03	465	5.57E-03	506	1.11E-02	547	1.39E-02
384	1.08E-04	425	6.33E-03	466	5.66E-03	507	1.11E-02	548	1.41E-02
385	1.15E-04	426	5.64E-03	467	5.83E-03	508	1.11E-02	549	1.44E-02
386	1.16E-04	427	5.02E-03	468	6.01E-03	509	1.11E-02	550	1.46E-02
387	1.25E-04	428	4.55E-03	469	6.15E-03	510	1.11E-02	551	1.49E-02
388	1.43E-04	429	4.14E-03	470	6.33E-03	511	1.11E-02	552	1.51E-02
389	1.62E-04	430	3.79E-03	471	6.49E-03	512	1.11E-02	553	1.54E-02
390	1.94E-04	431	3.51E-03	472	6.68E-03	513	1.11E-02	554	1.56E-02
391	2.52E-04	432	3.29E-03	473	6.84E-03	514	1.11E-02	555	1.59E-02
392	3.29E-04	433	3.12E-03	474	7.04E-03	515	1.11E-02	556	1.62E-02
393	4.38E-04	434	2.96E-03	475	7.24E-03	516	1.11E-02	557	1.65E-02
394	5.77E-04	435	2.87E-03	476	7.40E-03	517	1.11E-02	558	1.68E-02
395	7.95E-04	436	2.78E-03	477	7.58E-03	518	1.11E-02	559	1.71E-02
396	1.03E-03	437	2.72E-03	478	7.77E-03	519	1.11E-02	560	1.74E-02
397	1.41E-03	438	2.69E-03	479	7.96E-03	520	1.11E-02	561	1.78E-02
398	1.81E-03	439	2.70E-03	480	8.18E-03	521	1.12E-02	562	1.81E-02
399	2.34E-03	440	2.72E-03	481	8.37E-03	522	1.12E-02	563	1.85E-02
400	3.00E-03	441	2.78E-03	482	8.56E-03	523	1.13E-02	564	1.88E-02
401	3.81E-03	442	2.83E-03	483	8.74E-03	524	1.13E-02	565	1.91E-02
402	4.71E-03	443	2.92E-03	484	8.95E-03	525	1.13E-02	566	1.95E-02
403	5.70E-03	444	3.00E-03	485	9.12E-03	526	1.14E-02	567	1.99E-02
404	6.77E-03	445	3.08E-03	486	9.28E-03	527	1.14E-02	568	2.03E-02
405	8.04E-03	446	3.19E-03	487	9.47E-03	528	1.15E-02	569	2.07E-02
406	9.20E-03	447	3.30E-03	488	9.62E-03	529	1.15E-02	570	2.11E-02
407	1.03E-02	448	3.41E-03	489	9.77E-03	530	1.16E-02	571	2.14E-02
408	1.13E-02	449	3.51E-03	490	9.93E-03	531	1.17E-02	572	2.19E-02
409	1.20E-02	450	3.62E-03	491	1.01E-02	532	1.18E-02	573	2.22E-02
410	1.26E-02	451	3.74E-03	492	1.02E-02	533	1.19E-02	574	2.26E-02
411	1.30E-02	452	3.86E-03	493	1.03E-02	534	1.20E-02	575	2.30E-02
412	1.31E-02	453	3.99E-03	494	1.04E-02	535	1.21E-02	576	2.34E-02
413	1.32E-02	454	4.10E-03	495	1.05E-02	536	1.22E-02	577	2.38E-02
414	1.30E-02	455	4.23E-03	496	1.06E-02	537	1.23E-02	578	2.42E-02
415	1.28E-02	456	4.36E-03	497	1.07E-02	538	1.24E-02	579	2.45E-02
416	1.26E-02	457	4.48E-03	498	1.08E-02	539	1.26E-02	580	2.48E-02
417	1.22E-02	458	4.61E-03	499	1.08E-02	540	1.27E-02	581	2.52E-02
418	1.17E-02	459	4.75E-03	500	1.09E-02	541	1.29E-02	582	2.56E-02
419	1.11E-02	460	4.84E-03	501	1.09E-02	542	1.30E-02	583	2.60E-02
420	1.04E-02	461	4.98E-03	502	1.10E-02	543	1.32E-02	584	2.63E-02

Spectral Power Distribution

WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)	WL (nm)	SPD(W/nm)
585	2.66E-02	626	2.66E-02	667	1.25E-02	708	4.13E-03	749	1.23E-03
586	2.69E-02	627	2.62E-02	668	1.23E-02	709	4.02E-03	750	1.19E-03
587	2.72E-02	628	2.59E-02	669	1.20E-02	710	3.91E-03	751	1.15E-03
588	2.75E-02	629	2.56E-02	670	1.17E-02	711	3.80E-03	752	1.11E-03
589	2.77E-02	630	2.53E-02	671	1.14E-02	712	3.69E-03	753	1.09E-03
590	2.80E-02	631	2.50E-02	672	1.11E-02	713	3.58E-03	754	1.06E-03
591	2.83E-02	632	2.47E-02	673	1.09E-02	714	3.48E-03	755	1.02E-03
592	2.85E-02	633	2.43E-02	674	1.06E-02	715	3.38E-03	756	9.88E-04
593	2.87E-02	634	2.40E-02	675	1.03E-02	716	3.29E-03	757	9.63E-04
594	2.88E-02	635	2.36E-02	676	1.01E-02	717	3.20E-03	758	9.38E-04
595	2.91E-02	636	2.33E-02	677	9.84E-03	718	3.10E-03	759	9.13E-04
596	2.92E-02	637	2.29E-02	678	9.57E-03	719	3.01E-03	760	8.73E-04
597	2.94E-02	638	2.26E-02	679	9.35E-03	720	2.92E-03	761	8.64E-04
598	2.96E-02	639	2.22E-02	680	9.12E-03	721	2.85E-03	762	8.29E-04
599	2.96E-02	640	2.19E-02	681	8.87E-03	722	2.77E-03	763	8.13E-04
600	2.97E-02	641	2.15E-02	682	8.65E-03	723	2.68E-03	764	7.88E-04
601	2.98E-02	642	2.12E-02	683	8.41E-03	724	2.60E-03	765	7.64E-04
602	2.98E-02	643	2.08E-02	684	8.20E-03	725	2.53E-03	766	7.39E-04
603	2.99E-02	644	2.04E-02	685	7.99E-03	726	2.46E-03	767	7.21E-04
604	2.99E-02	645	2.01E-02	686	7.77E-03	727	2.38E-03	768	7.08E-04
605	2.99E-02	646	1.97E-02	687	7.56E-03	728	2.30E-03	769	6.74E-04
606	2.99E-02	647	1.93E-02	688	7.35E-03	729	2.24E-03	770	6.60E-04
607	2.99E-02	648	1.89E-02	689	7.16E-03	730	2.18E-03	771	6.39E-04
608	2.98E-02	649	1.86E-02	690	6.95E-03	731	2.12E-03	772	6.25E-04
609	2.98E-02	650	1.82E-02	691	6.77E-03	732	2.05E-03	773	6.04E-04
610	2.97E-02	651	1.79E-02	692	6.61E-03	733	1.99E-03	774	5.93E-04
611	2.96E-02	652	1.75E-02	693	6.40E-03	734	1.92E-03	775	5.69E-04
612	2.95E-02	653	1.72E-02	694	6.23E-03	735	1.87E-03	776	5.58E-04
613	2.94E-02	654	1.68E-02	695	6.06E-03	736	1.81E-03	777	5.40E-04
614	2.92E-02	655	1.65E-02	696	5.91E-03	737	1.76E-03	778	5.21E-04
615	2.90E-02	656	1.61E-02	697	5.73E-03	738	1.71E-03	779	5.05E-04
616	2.89E-02	657	1.58E-02	698	5.56E-03	739	1.64E-03	780	4.95E-04
617	2.87E-02	658	1.55E-02	699	5.40E-03	740	1.59E-03		
618	2.85E-02	659	1.51E-02	700	5.23E-03	741	1.55E-03		
619	2.83E-02	660	1.48E-02	701	5.10E-03	742	1.50E-03		
620	2.81E-02	661	1.45E-02	702	4.94E-03	743	1.45E-03		
621	2.78E-02	662	1.41E-02	703	4.79E-03	744	1.41E-03		
622	2.76E-02	663	1.38E-02	704	4.66E-03	745	1.38E-03		
623	2.74E-02	664	1.35E-02	705	4.53E-03	746	1.33E-03		
624	2.71E-02	665	1.32E-02	706	4.40E-03	747	1.29E-03		
625	2.68E-02	666	1.29E-02	707	4.24E-03	748	1.26E-03		

3.0 Results - Goniometric Measurements

Test conditions

Goniometer distance (m)	1
Temperature (°C)	25±1
Stabilization time (min)	50



Instrument

	Instrument	Manufacture	Model	
Photometric	Photometer and color meter	Minolta	CL-200A	
Electrical instrument	Power supply for test lamps	APT	Variplus 105	
	Power meter for test lamps	Chroma	66202	
Thermometer	Digital multimeter	YOKOGAWA	TY720	

Measurement results

Photometric		Electrical	
Central beam candle power(cd)	2909	Input voltage (V)	119.6
Beam Angle (°)	31	Current (A)	0.156
Field Angle (°)	59	Power (W)	18.4900
Chromaticity coordinates	u'= 0.2631	pf	0.9890
	v'= 0.5282		
	x = 0.4619		
	y = 0.4121		
CCT (K)	2683		

Luminous intensity distribution

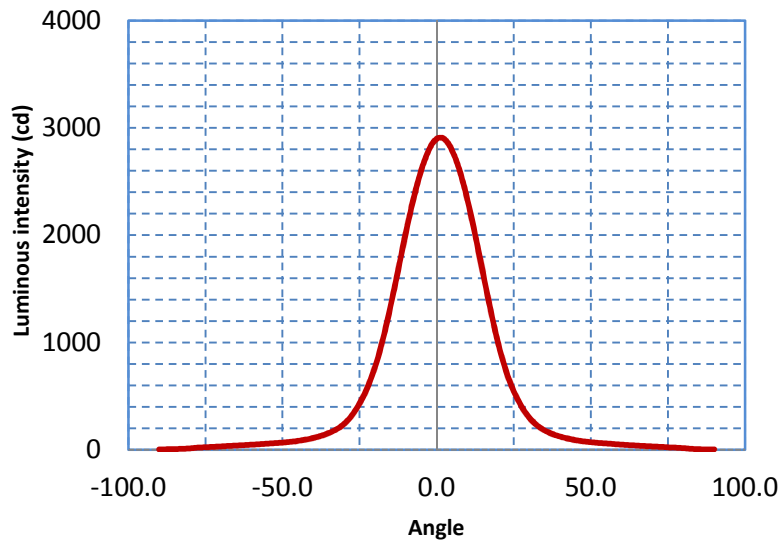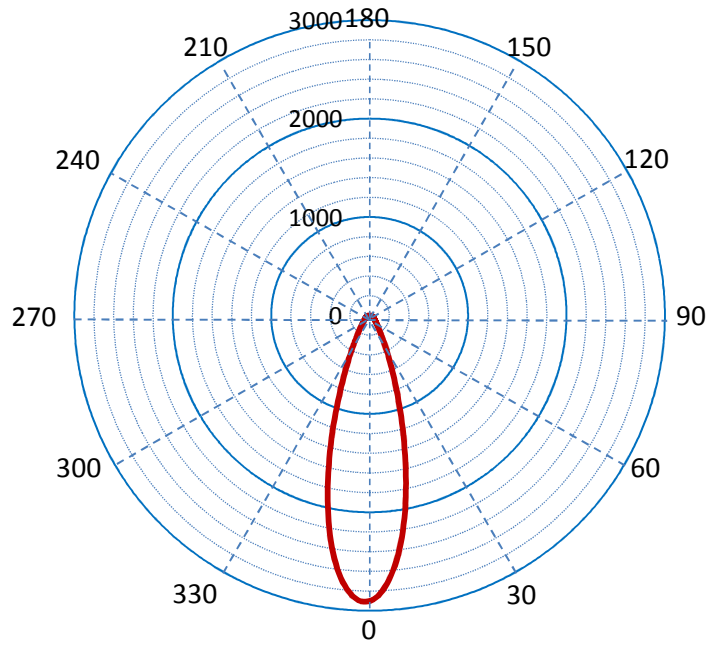


Zonal Lumen Tabulation					
Zones (°)	Lumens	%lamp	Zones (°)	Lumens	%lamp
0-5	32.2	5.4%	45-50	15.0	2.5%
5-10	86.5	14.5%	50-55	13.1	2.2%
10-15	110.7	18.6%	55-60	11.6	2.0%
15-20	99.9	16.8%	60-65	9.9	1.7%
20-25	71.8	12.1%	65-70	8.4	1.4%
25-30	47.8	8.0%	70-75	6.8	1.1%
30-35	31.5	5.3%	75-80	5.0	0.8%
35-40	23.0	3.9%	80-85	2.4	0.4%
40-45	18.1	3.0%	85-90	1.0	0.2%
Total lumen					595

Accumulated Zonal Lumen Tabulation					
Zones (°)	Lumens	%lamp	Zones (°)	Lumens	%lamp
0-5	32.2	5.4%	0-50	536.6	90.2%
0-10	118.8	20.0%	0-55	549.6	92.4%
0-15	229.4	38.6%	0-60	561.3	94.4%
0-20	329.4	55.4%	0-65	571.2	96.0%
0-25	401.1	67.4%	0-70	579.6	97.4%
0-30	449.0	75.5%	0-75	586.4	98.6%
0-35	480.4	80.8%	0-80	591.4	99.4%
0-40	503.5	84.6%	0-85	593.8	99.8%
0-45	521.6	87.7%	0-90	594.8	100.0%

Center and edge illuminance, beam and field diameter

Distance (m)	E on axis (lx)	Beam D(m)	E on the edge of beam (lx)	Field D(m)	E on the edge of field (lx)
1.0	3657	0.33	1758	0.7	308
1.5	1626	0.49	781	1.0	137
2.0	914	0.65	440	1.4	77
2.5	585	0.81	281	1.7	49
3.0	406	0.98	195	2.1	34
3.5	299	1.14	144	2.4	25
4.0	229	1.30	110	2.8	19
4.5	181	1.47	87	3.1	15
5.0	146	1.63	70	3.5	12
5.5	121	1.79	58	3.8	10
6.0	102	1.95	49	4.2	9
6.5	87	2.12	42	4.5	7
7.0	75	2.28	36	4.9	6
7.5	65	2.44	31	5.2	5
8.0	57	2.61	27	5.6	5
8.5	51	2.77	24	5.9	4
9.0	45	2.93	22	6.3	4
9.5	41	3.09	19	6.6	3
10.0	37	3.26	18	7.0	3

Beam illuminance vs. distance

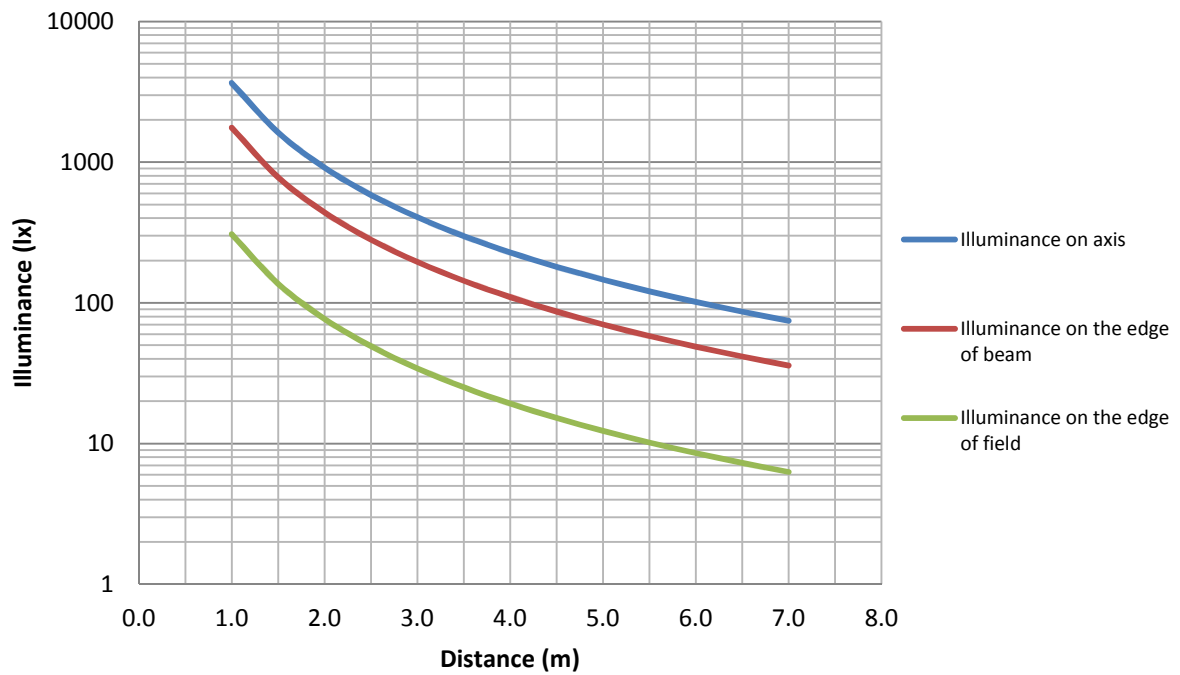

Luminous Intensity Distribution

Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)
-90.0	4.8	-69.5	32.7	-49.0	70.2	-28.5	285.2	-8.0	2280.5
-89.5	4.9	-69.0	33.6	-48.5	71.5	-28.0	302.1	-7.5	2340.1
-89.0	4.9	-68.5	34.4	-48.0	73.0	-27.5	320.5	-7.0	2398.4
-88.5	5.0	-68.0	35.2	-47.5	74.4	-27.0	340.2	-6.5	2453.1
-88.0	5.1	-67.5	35.9	-47.0	76.1	-26.5	361.1	-6.0	2506.7
-87.5	5.4	-67.0	36.8	-46.5	77.7	-26.0	383.4	-5.5	2556.7
-87.0	5.6	-66.5	37.6	-46.0	79.6	-25.5	407.0	-5.0	2604.3
-86.5	5.8	-66.0	38.4	-45.5	81.5	-25.0	431.9	-4.5	2649.5
-86.0	6.1	-65.5	39.2	-45.0	83.6	-24.5	458.0	-4.0	2690.0
-85.5	6.4	-65.0	39.9	-44.5	85.7	-24.0	485.6	-3.5	2729.3
-85.0	6.9	-64.5	40.7	-44.0	87.8	-23.5	514.7	-3.0	2763.8
-84.5	7.4	-64.0	41.4	-43.5	90.2	-23.0	545.4	-2.5	2795.9
-84.0	7.9	-63.5	42.3	-43.0	92.7	-22.5	577.8	-2.0	2824.5
-83.5	8.6	-63.0	43.0	-42.5	95.3	-22.0	612.2	-1.5	2849.5
-83.0	9.2	-62.5	43.8	-42.0	98.1	-21.5	648.5	-1.0	2869.7
-82.5	9.8	-62.0	44.6	-41.5	101.1	-21.0	687.0	-0.5	2885.2
-82.0	10.5	-61.5	45.5	-41.0	104.1	-20.5	727.8	0.0	2898.3
-81.5	11.2	-61.0	46.3	-40.5	107.4	-20.0	771.2	0.5	2905.4
-81.0	11.9	-60.5	47.1	-40.0	110.9	-19.5	816.5	1.0	2909.0
-80.5	12.9	-60.0	48.1	-39.5	114.5	-19.0	863.9	1.5	2909.0
-80.0	14.0	-59.5	49.0	-39.0	118.2	-18.5	914.4	2.0	2905.4
-79.5	15.4	-59.0	49.9	-38.5	122.1	-18.0	967.7	2.5	2895.9
-79.0	16.9	-58.5	50.8	-38.0	126.3	-17.5	1022.8	3.0	2882.8
-78.5	18.3	-58.0	51.8	-37.5	130.6	-17.0	1080.6	3.5	2865.0
-78.0	19.4	-57.5	52.7	-37.0	135.1	-16.5	1141.5	4.0	2844.7
-77.5	20.2	-57.0	53.7	-36.5	140.0	-16.0	1203.4	4.5	2818.5
-77.0	21.1	-56.5	54.6	-36.0	145.1	-15.5	1266.4	5.0	2790.0
-76.5	21.8	-56.0	55.3	-35.5	150.6	-15.0	1331.9	5.5	2757.8
-76.0	22.6	-55.5	56.4	-35.0	156.3	-14.5	1398.6	6.0	2723.3
-75.5	23.4	-55.0	57.4	-34.5	162.2	-14.0	1466.4	6.5	2684.0
-75.0	24.2	-54.5	58.2	-34.0	168.9	-13.5	1534.2	7.0	2641.2
-74.5	25.0	-54.0	59.2	-33.5	175.7	-13.0	1604.5	7.5	2597.2
-74.0	25.7	-53.5	60.1	-33.0	183.2	-12.5	1673.5	8.0	2547.2
-73.5	26.5	-53.0	61.1	-32.5	191.2	-12.0	1743.7	8.5	2497.2
-73.0	27.3	-52.5	62.1	-32.0	199.6	-11.5	1814.0	9.0	2443.6
-72.5	28.0	-52.0	63.1	-31.5	209.1	-11.0	1884.2	9.5	2385.3
-72.0	28.8	-51.5	64.2	-31.0	219.1	-10.5	1954.4	10.0	2327.0
-71.5	29.6	-51.0	65.3	-30.5	230.2	-10.0	2022.3	10.5	2266.3
-71.0	30.4	-50.5	66.4	-30.0	242.2	-9.5	2088.9	11.0	2203.2
-70.5	31.2	-50.0	67.6	-29.5	255.3	-9.0	2154.4	11.5	2137.7
-70.0	31.9	-49.5	68.9	-29.0	269.6	-8.5	2217.5	12.0	2071.1

Luminous Intensity Distribution

Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)	Angle (°C)	CP (cd)		
12.5	2003.2	33.0	218.2	53.5	62.3	74.0	25.5		
13.0	1933.0	33.5	207.8	54.0	61.2	74.5	24.8		
13.5	1864.0	34.0	198.4	54.5	60.1	75.0	24.0		
14.0	1792.5	34.5	189.5	55.0	59.0	75.5	23.2		
14.5	1721.1	35.0	181.3	55.5	58.1	76.0	22.5		
15.0	1649.7	35.5	173.8	56.0	57.1	76.5	21.8		
15.5	1578.3	36.0	166.8	56.5	56.2	77.0	20.9		
16.0	1508.1	36.5	160.2	57.0	55.1	77.5	20.2		
16.5	1437.8	37.0	154.1	57.5	54.0	78.0	19.4		
17.0	1370.0	37.5	148.3	58.0	53.0	78.5	18.7		
17.5	1302.1	38.0	142.8	58.5	51.8	79.0	17.9		
18.0	1236.7	38.5	137.7	59.0	50.7	79.5	17.0		
18.5	1171.2	39.0	132.8	59.5	49.6	80.0	16.1		
19.0	1106.9	39.5	128.2	60.0	48.6	80.5	14.6		
19.5	1046.2	40.0	123.8	60.5	47.5	81.0	13.1		
20.0	986.3	40.5	119.7	61.0	46.5	81.5	11.5		
20.5	930.8	41.0	115.8	61.5	45.5	82.0	10.4		
21.0	877.8	41.5	112.1	62.0	44.6	82.5	9.4		
21.5	827.6	42.0	108.6	62.5	43.7	83.0	8.7		
22.0	779.9	42.5	105.1	63.0	42.8	83.5	8.0		
22.5	735.1	43.0	102.0	63.5	42.0	84.0	7.4		
23.0	692.6	43.5	98.9	64.0	41.2	84.5	6.8		
23.5	652.6	44.0	95.9	64.5	40.3	85.0	6.2		
24.0	615.1	44.5	93.2	65.0	39.6	85.5	5.6		
24.5	579.5	45.0	90.6	65.5	38.8	86.0	5.0		
25.0	546.0	45.5	88.2	66.0	38.1	86.5	4.6		
25.5	514.7	46.0	85.8	66.5	37.3	87.0	4.3		
26.0	485.0	46.5	83.6	67.0	36.5	87.5	4.0		
26.5	457.2	47.0	81.5	67.5	35.7	88.0	3.8		
27.0	430.8	47.5	79.5	68.0	35.0	88.5	3.6		
27.5	405.9	48.0	77.6	68.5	34.2	89.0	3.5		
28.0	382.6	48.5	75.8	69.0	33.4	89.5	3.3		
28.5	360.4	49.0	74.2	69.5	32.6	90.0	3.2		
29.0	339.7	49.5	72.5	70.0	31.8				
29.5	320.1	50.0	70.9	70.5	30.9				
30.0	301.9	50.5	69.6	71.0	30.1				
30.5	284.9	51.0	68.2	71.5	29.4				
31.0	269.4	51.5	66.9	72.0	28.6				
31.5	255.0	52.0	65.7	72.5	27.9				
32.0	241.6	52.5	64.5	73.0	27.0				
32.5	229.5	53.0	64.2	73.5	26.3				