



GE
Lighting

WORLDWIDE PARTNER

Commercial Products & Solutions

[SITE SEARCH](#)

» [HOME](#)

» [PRODUCTS](#)

» [EDUCATION / RESOURCES](#)

» [LIGHTING APPLICATIONS](#)

[Where to Buy](#) | [FAQs](#) | [Contact Us](#) | [EliteNet](#)

[Products](#) > 13253


13253 – LU150/D/MED/ECO

GE Lucalox® High Pressure Sodium B17

RoHs Compliant

GENERAL CHARACTERISTICS


Lamp type	High Intensity Discharge - High Pressure Sodium
Bulb	B17
Base	Medium Screw (E26)
Bulb Finish	Diffuse
Wattage	150
Rated Life (MIN)	24000 hrs
Bulb Material	Hard glass
Lamp Enclosure Type (LET)	Open or enclosed fixtures
LEED-EB MR Credit	46 picograms Hg per mean lumen hour
Additional Info	TCLP compliant



Bulb



Base



[View Larger](#)

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	15000
Mean Lumens	13500
Nominal Initial Lumens per Watt	100
Color Temperature	2000 K
Color Rendering Index (CRI)	22

ELECTRICAL CHARACTERISTICS

Burn Position	Universal burning position
Open Circuit Voltage (RMS lag ballast) (MIN)	110 V
Warm Up Time to 90% (MIN)	3 min
Warm Up Time to 90% (MAX)	4 min
Hot Restart Time to 90% (MAX)	1 min

DIMENSIONS

Maximum Overall Length (MOL)	5.7500 in (146.0 mm)
Nominal Length	5.750 in (146.0 mm)

genet.gelighting.com/.../Dispatcher?RE...

ADDITIONAL RESOURCES

[Catalogs](#)

[Testimonials](#)

Brochures

Product Brochures

- [HID Lamps](#)

[MSDS \(Material Safety Data Sheets\)](#)

[Disposal Policies & Recycling Information](#)


GRAPHS & CHARTS

[Spectral Power Distribution](#)

Bulb Diameter (DIA)	2.125 in (53.9 mm)
Light Center Length (LCL)	3.500 in (88.9 mm)

PRODUCT INFORMATION

Product Code	13253
Description	LU150/D/MED/ECO
ANSI Code	S55
Standard Package	Case
Standard Package GTIN	10043168132531
Standard Package Quantity	6
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	6
UPC	043168132534

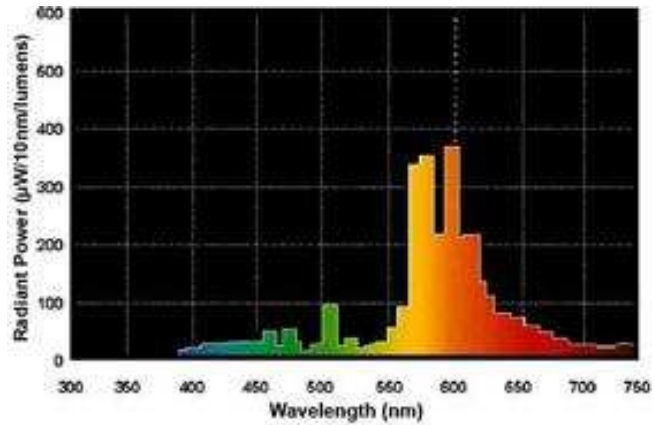

COMPATIBLE GE BALLASTS

Product Code	Description	# of Bulbs	Power Factor	Ballast Factor
86606	1233154U0001	1	0.8	1.0
87087	GES15048TLC3D-5	1	0.9	1.0
87094	GES150MLTLC3D-5	1	0.9	1.0

⚠ CAUTIONS & WARNINGS

[See list of cautions & warnings.](#)

[Return To Top](#)