

# A19 6W DIM. TITANIUM LED SERIES



PRO

- ⌚ Omnidirectional: 330° beam angle
- ⌚ High efficacy 75 LPW in Warm White
- ⌚ 30% energy savings compared to CFL
- ⌚ Comfortable warm diffused light
- ⌚ Natural A-lamp look fits all applications
- ⌚ Ideal for lamps with shades

6W REPLACES



**40W Inc.**

80% Energy Savings


**\$117 Savings per lamp\***



25,000 H



DIMMABLE



75 LPW EFFICACY



3 YR WARRANTY



80 CRI (Ra)



OMNI DIRECTIONAL




## A19 PRODUCT FEATURES

### Omnidirectional Lighting

This A19 meets the new ENERGY STAR V1.1 requirements for omnidirectional bulbs by providing 330° of evenly distributed light intensity. In the 135° to 180° zone, this lamp emits 65% more lumens than what is required by ENERGY STAR, providing a fuller light than other LED A-lamps.



### Exceptional Efficacy

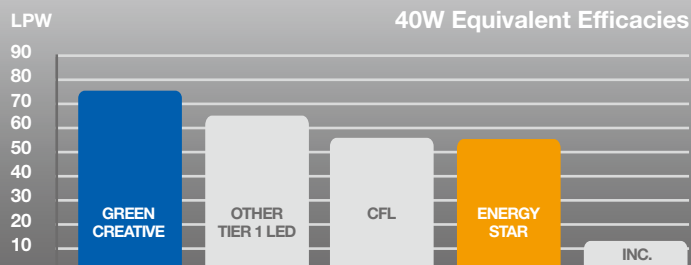

At 75 LPW, this lamp's efficacy is over 10% higher than the Tier 1 LED A19 40W replacement average and exceeds the new ENERGY STAR requirements by upwards of 35%. This energy-saving performance makes this lamp a smart retrofit choice for incandescent and CFL bulbs.

# A19 6W DIM. TITANIUM LED SERIES



## APPLICATIONS


### General Lighting



### Downlighting



### Uplighting

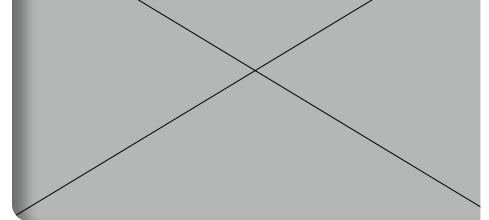

Ref.#: DS119-A19-6W

## SPECIFICATIONS

Product Model	97731 6A19DIM/827/R	97732 6A19DIM/830/R
Type	A19	A19
Base	E26	E26
Power (W)	6	6
Voltage - Frequency	120V 60Hz	120V 60Hz
Color Temp. (ANSI)	Soft White 2700K	Warm White 3000K
CRI (Ra)	80	80
Typical lumens (lm)	450	450
Efficacy (LPW)	75	75
Beam Angle	330°	330°
Dimmable	Yes**	Yes**
Power Factor	0.9	0.9
Rated Lifetime - L70 (hrs.)	25,000	25,000
Dia. x MOL	2.36"x4.41" (60x112mm)	2.36"x4.41" (60x112mm)
Weight (lb. / g)	0.24lb. / 111g	0.24lb. / 111g

\* Savings per lamp based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, \$2 incandescent with 1000-hr lifetime, \$9 LED with 25,000-hr lifetime

\*\* List of tested dimmer switches available on website

\*\*\* Suitable for damp locations. Not for use where directly exposed to weather or water