



SAFETY COATED / SHATTER RESISTANT

T8 LINEAR FLUORESCENT

LOW MERCURY/ENVIRO-LUME™

Enjoy top lamp performance with Superior Life® fluorescent lamps. Built stronger to last longer, these lamps outperform the competition, giving you the best overall value for a superior product.

- **ENERGY EFFICIENT**

use about 1/5 as much electricity as an incandescent lamp to produce the same amount of light.

- **BRASS PINS**

for better contact with sockets.

- **METAL ENDS**

for increased durability.

- **STRONGER LEAD-IN WIRES**

contributes to 44,000 user hours.

- **EXTENDED LIFE PHOSPHORS**

blended scientifically to reduce color shift and provide consistent light over the life of the lamp.

- **TRIPLE TUNGSTEN CATHODE**

heavy duty, triple wound to improve electrode emissions and coated with rare earth oxides to lengthen the cathode life.

- **CATHODE GUARD***

special alloy retards end blackening and improves lumen maintenance.


LOW MERCURY ENVIRO-LUME™ CERTIFIED



All of our Superior Life® linear fluorescents are certified to protect the environment and allow for convenient domestic disposal.

ENVIRONMENTAL FEATURES:

- Passes EPA tests for substances that might dissolve into the ecosystem.
- 80% less mercury protects the environment from excess mercury in discarded lamps. Use a cleaner, low-mercury gas for a more crisp, clean light output Approved for domestic disposal.
- Saves money on lamp disposal costs and offers you more disposal options.
- Krypton/Argon Gas mixture for reduced energy consumption.
- No loss in performance – high efficiency offers the same color temperature as a standard fluorescent lamp.

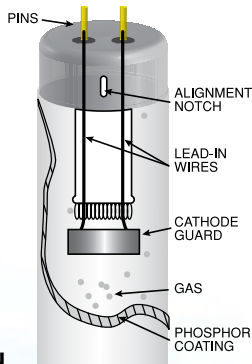

CATHODE GUARD LAMP CONSTRUCTION

**Some technical characteristics may change based on the model number.*

E EISA COMPLIANT - Meets United States Minimum Efficiency Standards.

Hg This lamp contains mercury. For proper lamp disposal contact your local municipal solid waste agency directly, call 888-537-4874 or visit lamprecycle.org for state-specific lamp recycling options.



Ordering Information

| ITEM# | DESCRIPTION | WATTS | COLOR | LUMENS (INITIAL) | LUMENS (MEAN) | CRI | LENGTH (INCHES) | BASE | HOURS (AVERAGE) | CASE |
|-------|--|-------|-------|------------------|---------------|-----|-----------------|------------|-----------------|------|
| 91521 | F17T8/830 - SUPERIOR LIFE® | 17 | 3000K | 1400 | 1300 | 86 | 24 | MED BI PIN | 36,000 | 25 |
| 91524 | F17T8/835 - SUPERIOR LIFE® | 17 | 3500K | 1400 | 1300 | 86 | 24 | MED BI PIN | 36,000 | 25 |
| 91527 | F17T8/841 - SUPERIOR LIFE® | 17 | 4100K | 1400 | 1300 | 86 | 24 | MED BI PIN | 36,000 | 25 |
| 91530 | F17T8 - SKY-BRITE PLUS™ | 17 | 5000K | 1400 | 1300 | 86 | 24 | MED BI PIN | 36,000 | 25 |
| 91533 | F25T8/830 - SUPERIOR LIFE® | 25 | 3000K | 2225 | 2050 | 86 | 36 | MED BI PIN | 36,000 | 25 |
| 91536 | F25T8/835 - SUPERIOR LIFE® | 25 | 3500K | 2225 | 2050 | 86 | 36 | MED BI PIN | 36,000 | 25 |
| 91539 | F25T8/841 - SUPERIOR LIFE® | 25 | 4100K | 2225 | 2050 | 86 | 36 | MED BI PIN | 36,000 | 25 |
| 91542 | F25T8 - SKY-BRITE PLUS™ | 25 | 5000K | 2225 | 2050 | 86 | 36 | MED BI PIN | 36,000 | 25 |
| 91729 | F32T8/835/25W - SUPERIOR LIFE® CEE | 25 | 3500K | 2500 | 2425 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 91730 | F32T8/841/25W - SUPERIOR LIFE® CEE | 25 | 4100K | 2500 | 2425 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 91637 | F32T8/SKY-BRITE®/25W SAFETY COATED | 25 | 5000K | 2400 | 2330 | 82 | 48 | MED BI PIN | 24,000 | 30 |
| 91732 | F32T8/SKY-BRITE PLUS™/25W CEE | 25 | 5000K | 2500 | 2425 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 72732 | F32T8/850/25W CEE | 25 | 5000K | 2500 | 2425 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 91620 | F28T8/835 - SUPERIOR LIFE® CEE | 28 | 3500K | 2725 | 2560 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 91621 | F28T8/841 - SUPERIOR LIFE® CEE | 28 | 4100K | 2725 | 2560 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 72621 | F28T8/841 CEE | 28 | 4100K | 2970 | 2800 | 86 | 48 | MED BI PIN | 36,000 | 30 |
| 91640 | F28T8/SKY-BRITE® SAFETY COATED | 28 | 5000K | 2650 | 2515 | 82 | 48 | MED BI PIN | 24,000 | 30 |
| 91622 | F28T8/SKY-BRITE PLUS™ CEE | 28 | 5000K | 2725 | 2560 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 72622 | F28T8/850 CEE | 28 | 5000K | 2770 | 2800 | 86 | 48 | MED BI PIN | 36,000 | 30 |
| 81613 | F32T8 - SKY-BRITE™ | 32 | 5000K | 2850 | 2670 | 78 | 48 | MED BI PIN | 36,000 | 30 |
| 91595 | F32T8/830 - SUPERIOR LIFE® CEE | 32 | 3000K | 3100 | 2950 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 91601 | F32T8/835 - SUPERIOR LIFE® CEE | 32 | 3500K | 3100 | 2950 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 72601 | F32T8/835 CEE | 32 | 3500K | 3100 | 2950 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 91607 | F32T8/841 - SUPERIOR LIFE® CEE | 32 | 4100K | 3100 | 2950 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 91644 | F32T8/841 - SUPERIOR LIFE® SAFETY COATED | 32 | 4100K | 3000 | 2850 | 82 | 48 | MED BI PIN | 24,000 | 30 |
| 72607 | F32T8/841 CEE | 32 | 4100K | 3100 | 2950 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 91645 | F32T8/SKY-BRITE® SAFETY COATED | 32 | 5000K | 2900 | 2825 | 82 | 48 | MED BI PIN | 24,000 | 30 |
| 91613 | F32T8 - SKY-BRITE PLUS™ HI LUMEN CEE | 32 | 5000K | 3100 | 2950 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 72613 | F32T8/850 CEE | 32 | 5000K | 3100 | 2950 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 91615 | F32T8 - VITA-BRITE® CEE | 32 | 5700K | 3100 | 2950 | 91 | 48 | MED BI PIN | 36,000 | 30 |
| 82614 | F32T8/865 - SUPERIOR LIFE® CEE | 32 | 6500K | 3100 | 2950 | 85 | 48 | MED BI PIN | 36,000 | 30 |
| 91618 | F32T8/BLB - SUPERIOR LIFE® | 32 | BLACK | N/A | N/A | N/A | 48 | MED BI PIN | 20,000 | 30 |
| 91631 | F40T8/835 - SUPERIOR LIFE® | 40 | 3500K | 3725 | 3500 | 85 | 60 | MED BI PIN | 24,000 | 25 |
| 91632 | F40T8/841 - SUPERIOR LIFE® | 40 | 4100K | 3725 | 3500 | 85 | 60 | MED BI PIN | 24,000 | 25 |
| 91633 | F58T8/835 - SUPERIOR LIFE® | 58 | 3500K | 5300 | 4950 | 85 | 60 | MED BI PIN | 20,000 | 25 |
| 91635 | F58T8/841 - SUPERIOR LIFE® | 58 | 4100K | 5300 | 4950 | 85 | 60 | MED BI PIN | 20,000 | 25 |
| 90148 | F96T8/841 - SUPERIOR LIFE® | 59 | 4100K | 5800 | 5610 | 85 | 96 | SINGLE PIN | 24,000 | 25 |
| 90150 | F96T8/SKY-BRITE PLUS™ | 59 | 5000K | 5800 | 5610 | 85 | 96 | SINGLE PIN | 24,000 | 25 |
| 90153 | F96T8/SKY-BRITE PLUS®/HO | 86 | 5000K | 8100 | 7525 | 85 | 96 | RDC | 24,000 | 25 |

T8 U-BEND

| | | | | | | | | | | |
|-------|--------------------------------|----|-------|------|------|----|------|------------|--------|----|
| 91625 | FB28T8/835/U6 - SUPERIOR LIFE® | 28 | 3500K | 2725 | 2560 | 85 | 22.5 | MED BI PIN | 36,000 | 20 |
| 91626 | FB28T8/841/U6 - SUPERIOR LIFE® | 28 | 4100K | 2725 | 2560 | 85 | 22.5 | MED BI PIN | 36,000 | 20 |
| 91627 | FB28T8/SKY-BRITE PLUS™/U6 | 28 | 5000K | 2725 | 2560 | 85 | 22.5 | MED BI PIN | 36,000 | 20 |
| 91602 | FB32T8/835/U6 - SUPERIOR LIFE® | 32 | 3500K | 2800 | 2535 | 85 | 22.5 | MED BI PIN | 36,000 | 20 |
| 91608 | FB32T8/841/U6 - SUPERIOR LIFE® | 32 | 4100K | 2800 | 2535 | 85 | 22.5 | MED BI PIN | 36,000 | 20 |
| 91614 | FB32T8/SKY-BRITE PLUS™/U6 | 32 | 5000K | 2800 | 2535 | 85 | 22.5 | MED BI PIN | 36,000 | 20 |
| 91609 | FB32T8/865/U6 - SUPERIOR LIFE® | 32 | 6500K | 2800 | 2535 | 85 | 22.5 | MED BI PIN | 36,000 | 20 |

INITIAL LUMENS: Lumen output based upon the performance after 100 hours of operating life.

MEAN LUMENS: Lumen output at 40% of the lamps rated average life.

AVERAGE LIFE: Lamps turned off and restarted no more frequently than once every 3 operating hours, lamp life can be considerably longer if started less frequently.

Lamp life will be 36,000 hours for program rapid start operation and 24,000 hours for instant start operation at 3 hours per start.

WARRANTY: Lamps are warranted for 24 months.



E EISA COMPLIANT - Meets United States Minimum Efficiency Standards.

Hg This lamp contains mercury. For proper lamp disposal contact your local municipal solid waste agency directly, call 888-537-4874 or visit lamprecycle.org for state-specific lamp recycling options.

TCLP COMPLIANT

ENVIRO-LUME™
LOW
MERCURY PRODUCT



GO GREEN