## **IOS-DDR**




## PIR Occupancy/ Vacancy Sensor dual load for 120V/277V



## **Features:**

- Two ON/OFF push buttons allow control of two loads independently
- No neutral required
- For use with electronic fluorescent ballasts
- Time delay OFF ranging from 15 seconds to 30 minutes
- Passive Infrared technology
  - Adjustable sensitivity settings
  - Standard decorator wall plate included
  - ISO9001 Registered manufacturing facility
  - UL/cUL Listed device
  - Five Year Limited Warranty

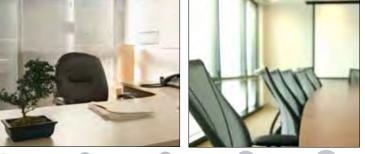




*Ideal for:* Offices, Copy Rooms, Small Conference Rooms, Break Rooms










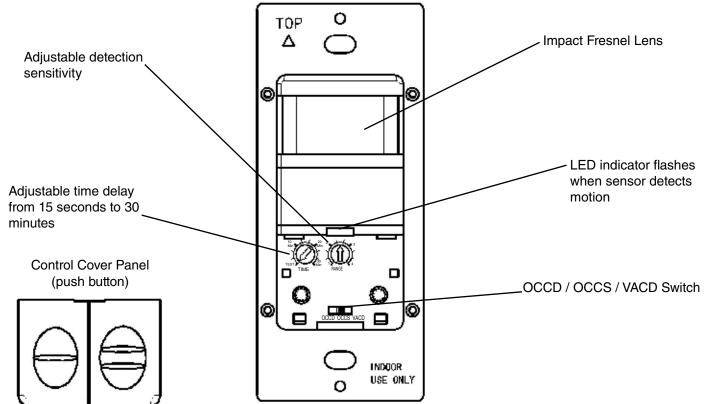

Primary Secon Load Loa



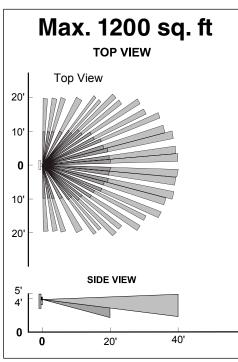

180° Field of View

**IOS-DDR** Part # Double Pole, Wall Switch PIR Desc Occupancy/Vacancy Sensor Switch for 120V/277V Rating Incandescent / Tungsten: 800W-120VAC Fluorescent / Ballast: 800VA-120VAC / 1600VA-277VAC Motor: 1/4HP-120VAC Time Delay: 15 Sec to 30 Min Light Level: 30 Lux--Daylight Operation Temperature: 32°F--131°F / 0-55°C No minimum Load required. For use with electronic fluorescent ballasts Coverage 180°, Max 1200 sq.ft Color White **Five Year Limited Warranty** 

## Model Ordering Info:

Series	Style	_	Туре	_	Finish
IOS	D		DR		WH
Intermatic	Decorator		Dual Relay		White
Occupancy	Plate				
Sensor					

©2011 Intermatic Inc. 7777 Winn Road, Spring Grove, IL 60081 Phone: (815) 675-2321 www.intermatic.com 3000V00016