

LINDRIVE

CONSTANT VOLTAGE CLASS 2 PHASE CUT DIMMABLE LED DRIVER



CLASS 2

12V
DC

P/N: SLT40L12DC



The LinDrive Series of Constant Voltage Class 2 LED Drivers offer smooth flicker free dimming with a wide variety of compatible dimmers.

The drivers low profile plastic enclosure enables easy and safe installation making it the perfect choice for under cabinet lights, tape lights and various LED fixture installations.

Our electrical specification includes auto reset, over current and short circuit protection.

As always, 5-year warranty is a standard on all of Magnitude's products.

QUICK SPECS

Input Voltage	Max Output Power	Output Voltage	Output Current	Efficiency @ Max Load	Env. Protection Rating	Weight
100-130VAC	40W	12VDC	3330mA	> 82%	IP21	312gr / 11oz


ENCLOSURE DETAILS In. (mm)

Length	7 (177.8)
Mounting Length	6.7 (169.7)
Width	2.4 (60.8)
Height	1 (24.5)

FEATURES

- Phase Cut Dimmable
- Super compact plastic case, less than 1" high.
- Class 2
- ETL Listed
- Auto-Reset Protection for short circuits & over-voltage.

WIRING DIAGRAM

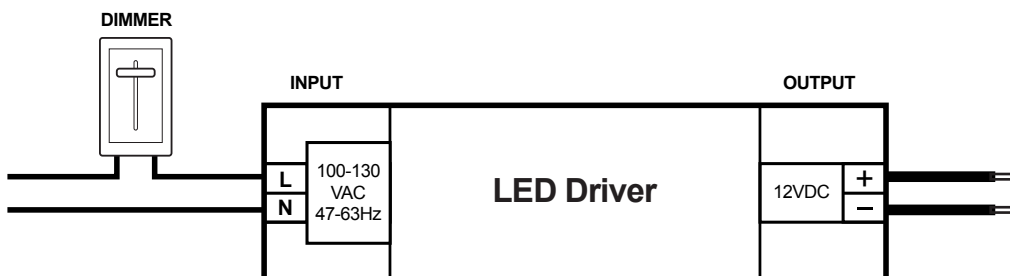

SPECIFICATIONS

Input

Input Voltage Range	100 - 130VAC
Input Frequency	47 - 63Hz
Input current	0.9A Max
Inrush Current	13A Max
Efficiency	> 82% @Max Load
Power Factor	> 0.65

Output

Output Voltage	12VDC
Output Current	3330mA Max
Line Regulation	± 3%
Load Regulation	± 3%
Turn On Delay Time	< 0.4 Sec @Max Load

Environmental

Env. Protection Rating	Dry and Damp Locations
Operating Ambient temperature	-25°C - +45°C
Max Case Temp. (Tcase)	75°C for a 5 year warranty
Storage temperature	-40°C - +85°C
Expected life time	50K Hours > 75°C Tc Max
Audible Noise	< 24db Class A

Dimming

Dimming Control	Phase cut
Dimming Range	1 - 100%

Protections

Over Current Protection	Yes, CC mode
Short Circuit Protection	Yes, Hiccup mode
Over Voltage Protection	Yes
Over Temperature Protection	Yes, Hiccup mode
Over Load Protection	Yes, CC mode

Mechanical & Housing Specification	
Length	178mm / 7"
Width	61mm / 2.40"
Height	24mm / 0.94"
Housing Material	ABS
Housing Color	Blue
Connectors type	Terminals 14-26 AWG
Weight	312g / 11oz
Approval Markings	
Certificates / Approval signs	ETL Listed under UL 8750 and 1310

MECHANICAL DIAGRAM

