

MD-SERIES

MAGNETIC DIMMABLE LED DRIVER







P/N: MD-200-24




KLUS - MD-200-24 is the most compact LED driver on the market with a magnetic transformer core. It is equipped with two push-to-reset circuit breakers on the input and output, which protect both the load and driver. The driver is encased in a coated metal box that includes 2 knock-outs on the bottom to enable easy installation that complies with electrical code requirements.

QUICK SPECS

Input Voltage	Max Output Power	Output Voltage	Output Current	Efficiency @ Max Load	Power Factor @ Max. Load	Envir. Protection Rating	Weight
120VAC	200W	24VDC	10.9 A	> 87%	> 0.93	NEMA 3R	87oz

WIRING DIAGRAM





ENCLOSURE DETAILS In. (mm)

Length	10.06 (255.5)		
Width	3.09 (78.5)		
Height	2.84 (72.1)		

FEATURES

- Dimmable with any standard MLV/Incandescent TRIAC- (Leading edge) dimmer switch
- Dual protection two manual push-to-reset circuit breakers on the primary and secondary sides
- Low operating temperature
- Nema 3R Outdoor Use
- Two bottom knock-outs
- Optional 10% voltage boost to compensate for voltage drop
- ETL Listed
- Certified to CSA Standard








SPECIFICATIONS

Input					
Input Voltage	120VAC				
Input Current @ Max Load	2.51 A				
Power Factor	0.93				
Efficiency	> 87%				
Output					
Max Load	200W				
Output Voltage	23.3 VDC				
Output Current @ Max Load	10.9 A				
Open Circuit Output Voltage	26.2 VDC				
Coil Former	Double Section Bobbin				
Envrionmental					
Operating Temperature	-30°c - 45°c (-22°F - 113°F)				
Min Installation space between drivers	5"Inch				
Thermal Class	B130°c				
Protections					
Circuit Breaker	Primary and secondary push to reset				
Mechanical & Housing					
Leads Primary	PVC 600V #18				
Leads Secondary	PVC 300V #12				
Length	10.06" (255.5mm)				
Width	3.09" (78.5mm)				
Height	2.84" (72.1mm)				
Weight	87oz				
Housing Material	Coated metal				
Housing Color	Black				
Junction Box	Yes				
Mounting	Two Hole flange mounting				
Approval Markings					
Certificates / Approval Signs	UL 8750				


MD-SERIES MAGNETIC DIMMABLE LED DRIVER

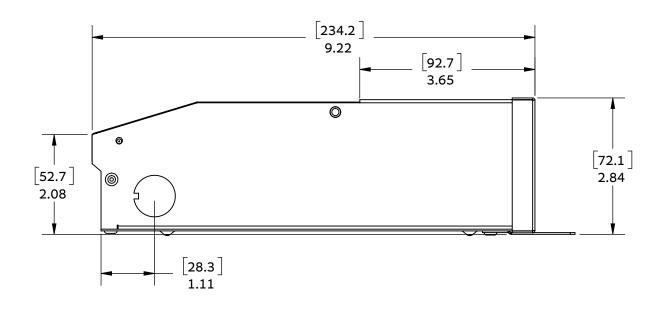

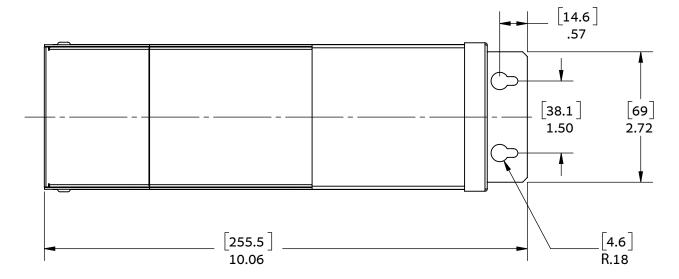

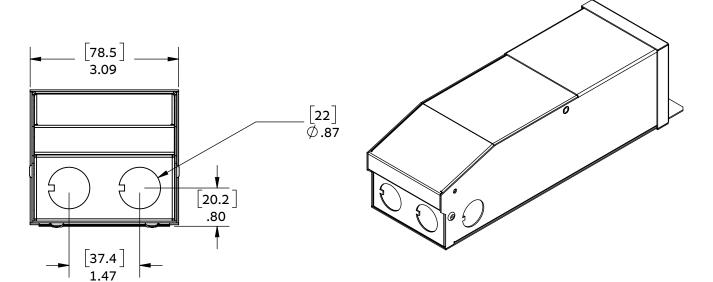

MD-SERIES MAGNETIC DIMMABLE LED DRIVER

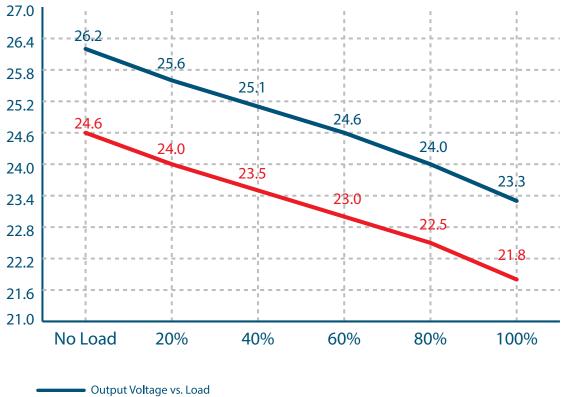

Output Voltage With a Typical Dimmer