



LED T8 Tube






"Plug" and "Play" procedure

1. Turn off the power to the light fixture at the breaker panel before installation.
2. Open the diffuser from the light fixture.
3. Remove the fluorescent tubes. Please dispose of these items properly as they contain mercury.
4. Put led tube into the lighting fixture.
5. Install the LED tubes, close the diffuser.
6. Turn on the power.

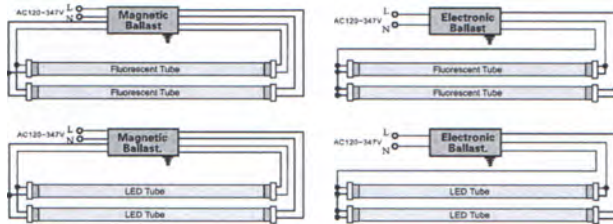

Retrofit Procedure

- 1, Turn off the power to the light fixture at the breaker panel before installation.
- 2, Open the diffuser from the light fixture.
- 3, Remove the fluorescent tubes. Please dispose of these items properly as they contain mercury.
- 4, Cut the wires shown as the diagram below.
- 5, Make the new wire connect to branch circuit shown as the diagram below.
- 6, Replace the cover over the wiring channel.
- 7, Install the LED tubes, close the diffuser.
- 8, Turn on the power.

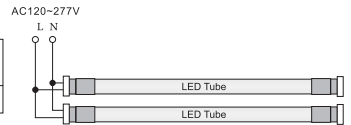

CAUTION:

CAUTION-RISK OF FIRE - IF THE LAMP OR LUMINAIRE EXHIBITS UNDESIRABLE OPERATION (BUZZING, MANUFACTURER FLICKERING, ETC.), IMMEDIATELY TURN OFF POWER, REMOVE LAMP FROM LUMINAIRE AND CONTACT.

WARNING-DO NOT INSTALL THIS LAMP IN A PRE-HEAT LUMINAIRE, SUITABLE USE IN DRY OR DAMP LOCATION, USE WITH OR WITHOUT DIFFUSER.

CAUTION-THIS LAMP OPERATES ON INSTANT START ELECTRONIC BALLASTS ONLY. IF LAMP DOES NOT LIGHT WHEN THE LUMINAIRE IS ENERGIZED, REMOVE LAMP FROM LUMINAIRE AND CONTACT LAMP MANUFACTURER OR QUALIFIED ELECTRICIAN.

THESE DEVICES ARE NOT INTENDED FOR USE WITH EMERGENCY EXIT FIXTURES OR EMERGENCY EXIT LIGHTS.