

T8 11.5W 4FT. DEB TITANIUM LED SERIES



PRO



BYPass

11.5W REPLACES



**32W
Fluo.**

60% Energy Savings

\$143 Savings
per fixture*

- Double-ended BYPass installation – wired at both ends
- Utilizes existing lampholders – non-shunted or shunted
- Wide beam design: 310° light emitting area
- Suitable for use in totally enclosed fixtures
- Frosted glass tube for increased light diffusion efficiency
- Meets NSF/ANSI Standard 2 requirements



LM 79

LM 80

TM 21


IES



50,000 H



UNIVERSAL




EFFICACY



WARRANTY



CRI (Ra)




ENCLOSURE**

TUBE FEATURES

Double-ended BYPass Installation


The T8 DEB lamp installs quickly and safely without the need to rewire to a single end or replace lampholders. After bypassing the ballast the lamp utilizes the existing non-shunted or shunted lampholders and line and neutral are connected to each end. The lamp adheres to UL requirements to be wired in this configuration.

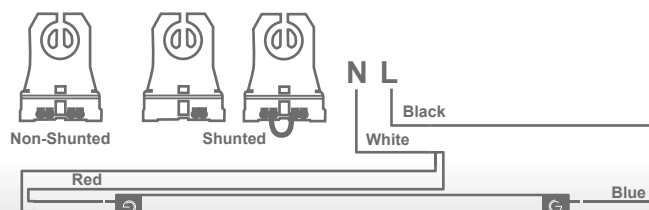

Extra Wide Beam Design - Frosted Glass Body



Lamp Front View

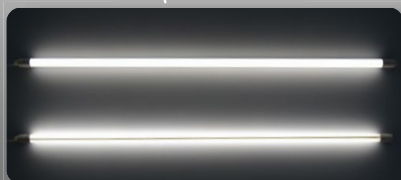


Lamp Back View

This lamp uses an innovative coated glass design that diffuses heat and light more evenly than plastic. As a result of its compact light engine, this lamp produces a light emitting area of 310°. This wider beam angle improves a fixture's total light distribution and creates a more complete lighting effect.

T8 11.5W 4FT. DEB TITANIUM LED SERIES



BYPASS INSTALLATION

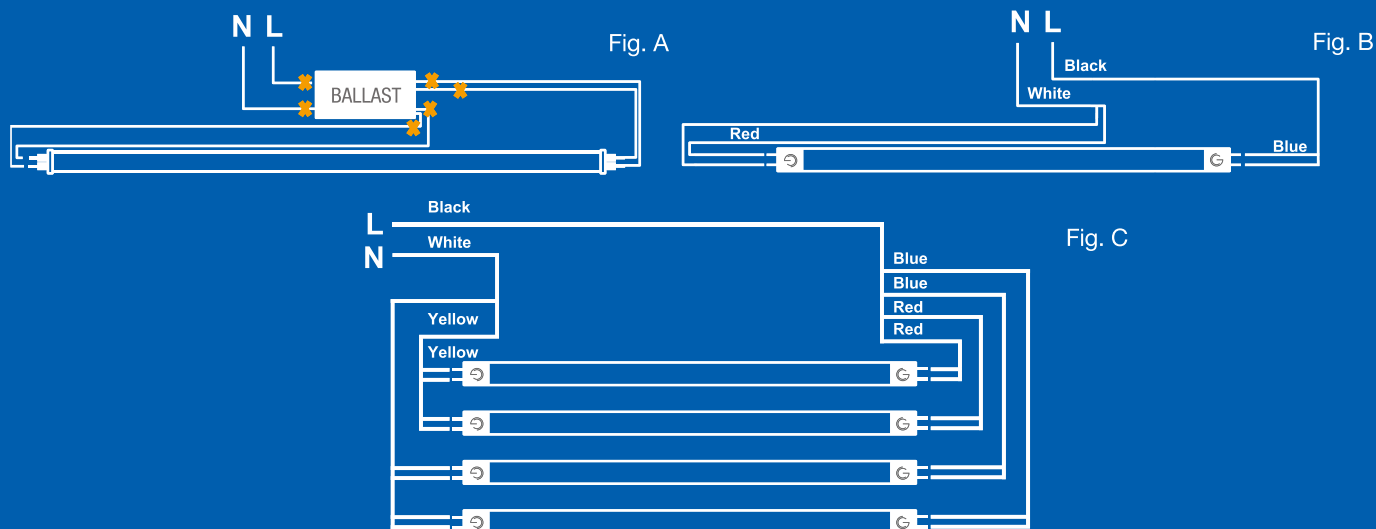

- ⌚ Bypass ballast by cutting all wires as in Fig. A
- ⌚ For single tube, follow wiring instructions in Fig. B. For multiple tubes follow wiring instructions in Fig. C
- ⌚ Lampholders do not need to be replaced. Continue using existing non-shunted or shunted lampholders
- ⌚ Existing fixture maintains original UL compliance as per UL 1598C tube

SPECIFICATIONS***

Product Model	58272 11.5T8/4F/830/DEB	58273 11.5T8/4F/835/DEB	58274 11.5T8/4F/840/DEB	58275 11.5T8/4F/850/DEB
Type	T8	T8	T8	T8
Base	Medium Bi-Pin G13	Medium Bi-Pin G13	Medium Bi-Pin G13	Medium Bi-Pin G13
Power (W)	11.5	11.5	11.5	11.5
Voltage - Frequency	120-277V 50-60Hz	120-277V 50-60Hz	120-277V 50-60Hz	120-277V 50-60Hz
Color Temp. (ANSI)	Warm White 3000K	Neutral White 3500K	Natural White 4000K	Daylight 5000K
CRI (Ra)	82	82	82	82
Typical lumens (lm)	1650	1650	1700	1700
Efficacy (LPW)	143	143	148	148
Light Emitting Area	310°	310°	310°	310°
Beam Angle	160°	160°	160°	160°
Dimmable	No	No	No	No
Power Factor	0.9	0.9	0.9	0.9
THD	<20%	<20%	<20%	<20%
Rated Lifetime - L70 (hrs.)	50,000	50,000	50,000	50,000
Dia. x MOL	1.14"x47.76" (29x1213mm)	1.14"x47.76" (29x1213mm)	1.14"x47.76" (29x1213mm)	1.14"x47.76" (29x1213mm)
Weight (lb. / g)	0.57lb. / 259g	0.57lb. / 259g	0.57lb. / 259g	0.57lb. / 259g

* Savings per fixture based on \$0.11 / kw energy cost, 12 hrs / day lamp usage, 2x36W fixture / \$10 fluorescent tube, \$45 ballast with 15,000 hr lifetime, \$35 LED tube with 50,000 hr lifetime

** Suitable for use in totally enclosed fixtures

*** Specification data is preliminary and may be subject to change

**** Suitable for damp locations. Not for use where directly exposed to the weather or water