


# 90+ LIGHTING CHANDELIER C12 4.5W



**40W**  
REPLACEMENT

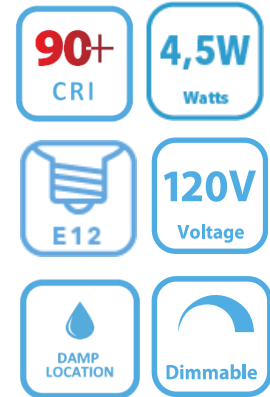

High quality of light and color rendering (90+ CRI, 50+ R9),  
with low flicker, flicker <30%,  
Smooth dimming. Dimming lower than 10%.




## ELECTRICAL SPECIFICATIONS


MODEL NO.	LUMEN	POWER	CCT	BEAM	CRI	PF	CBCP
SE-350.043	320LM	4.5W	2700K	180°	>90	>0.9	-
SE-350.151	320LM	4.5W	3000K	180°	>90	>0.9	-

## MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SE-350.043	1.42in X 3.93in	1.38oz	-20°C - 40°C	12pcs	48pcs
SE-350.151	1.42in X 3.93in	1.38oz	-20°C - 40°C	12pcs	48pcs



# 90+ LIGHTING CHANDELIER C12 4.5W

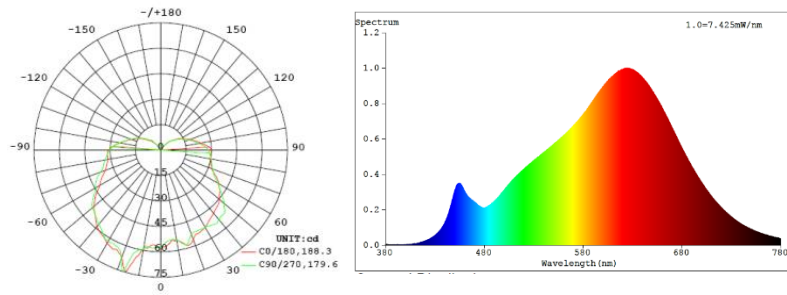


## RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

## R VALUES

R1=94	R2=98	R3=99	R4=93	R5=94	R6=97	R7=92
R8=82	R9=62	R10=93	R11=94	R12=86	R13=95	R14=99

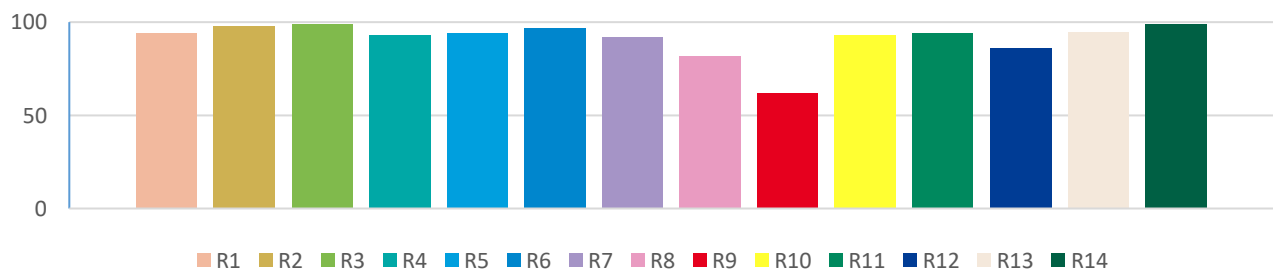

## TM30 GRAPHIC

TM-30 deals with the color rendition of object.

Rf- a fidelity index that is similar to the commonly used CRI

Rg- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

