



Elite LED Deco Lamps

TCP Elite Decorative lamps closely mimic the look and feel of incandescent but last much longer.

Limitless options for the following applications:

- Accent and decorative lighting
- Chandeliers
- Ceiling fans
- Indoor/outdoor fixtures

Great features and benefits:

- Energy efficient: 80% energy savings
- Replaces 25W and 40W incandescent lamps
- Smooth, uniform dimming—perfect for chandeliers
- Long life: 25,000 hours
- Excellent color consistency and high color rendering (CRI)
- UL damp location rated—excellent for use in outdoor applications



Candelabra Blunt Tip*
Frosted and Clear



Candelabra Flame Tip*
Clear



* Also available in an E26 base (frosted and clear)



LED
we know light.™



CREATING BEAUTY

TCP has a **20-year** history in energy-efficient lighting.

Thanks to our **cutting edge technology** and manufacturing

expertise, we have shipped billions of high quality lamps. Our

integrated technology and manufacturing provides

expedited time-to-market. With TCP, you can count on

unique lighting products designed to meet very specific needs—lighting that

transforms your surroundings and envelopes you in warmth—**lighting**

that generates beauty with every flip of the switch.

LED



LED ELITE Series LED Dimmable Decorative Series Specifications

LED	25,000 hours average rated life, 120 volts
-----	--

Applications

Ideal for decorative dimming applications. Suitable for outdoor fixtures. Also perfect for applications with hard to reach areas, vibration, and frequent starts.

Accent and decorative lighting including:

- + Chandeliers
- + Indoor Fixtures
- + Ceiling Fans
- + Outdoor Fixtures
- + Decorative
- + Wall Scones

Light output equivalency:

5w = 40w


4w = 25w



Features and Benefits

- Long life: 25,000 hours — no more bulb replacements
- Fully dimmable, brilliant LED light
- Excellent white color consistency from bulb to bulb
- UL approved for dry and damp locations
- Available in E12 and E26 base

** Three or more lamps per dimming circuit is recommended for optimal dimming*

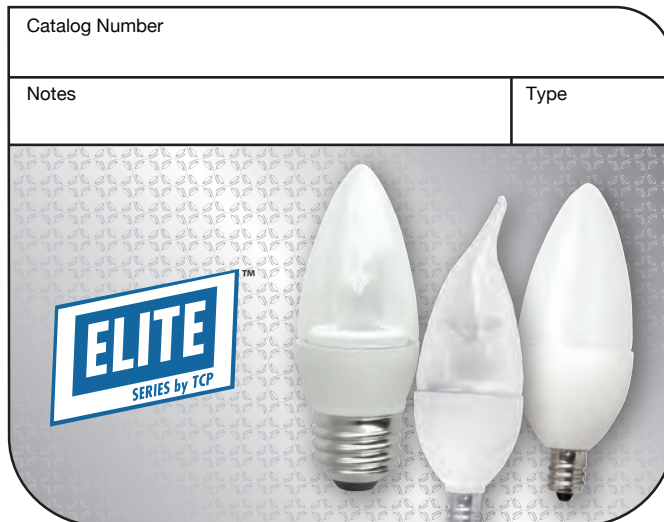

Specifications (at full brightness)


Input Line Voltage:	120VAC
Input Line Frequency	60HZ
Lamp Life (Rated)	25,000 hrs
Minimum Starting Temp	-30°C
Maximum Operating Temp	40°C
UL/cUL Listed	Yes
Power Factor	92%
CRI	80



LED5E12B11XXK
LED4E12B11XXK



LED5E26B11XXK
LED4E26B11XXK



LED5E12F1127K
LED4E12F1127K



LED5E26F1127K
LED4E26F1127K



LED5E12B11XXKF
LED4E12B1127KF



LED5E26B1127KF
LED4E26B1127KF



LED5E26F1127KF
LED4E26F1127KF



5 YEAR
WARRANTY

RoHS
COMPLIANCE

For the most up-to-date specs, please visit www.tcp.com



LED ELITE Series LED Dimmable Decorative Series Specifications

Warranties and Certifications:  5 YEAR WARRANTY RoHS COMPLIANT	Item #	Description	Voltage	Wattage	Wattage Equivalent	M.O.L. (inches)	Diameter (inches)	Lumens	LPW	CCT	CRI
	3.5W Decorative Lamps										
	LED4E12B1124K	LED 4W B11 DIM 2400K E12	120	3.5	25W	3.8	1.4	250	71.4	2400K	80
	LED4E12B1124KF	LED 4W B11 DIM 2400K E12 FROST	120	3.5	25W	3.8	1.4	250	71.4	2400K	80
	LED4E12B1127K	LED 4W B11 DIM 2700K E12	120	3.5	25W	3.8	1.4	280	80	2700K	80
	LED4E12B1127KF	LED 4W B11 DIM 2700K E12 FROST	120	3.5	25W	3.8	1.4	280	80	2700K	80
	LED4E26B1124K	LED 4W B11 DIM 2400K E26	120	3.5	25W	3.8	1.4	250	71.4	2400K	80
	LED4E26B1124KF	LED 4W B11 DIM 2400K E26 FROST	120	3.5	25W	3.8	1.4	250	71.4	2400K	80
	LED4E26B1127K	LED 4W B11 DIM 2700K E26	120	3.5	25W	3.8	1.4	280	80	2700K	80
	LED4E26B1127KF	LED 4W B11 DIM 2700K E26 FROST	120	3.5	25W	3.8	1.4	280	80	2700K	80
	LED4E12F1127K	LED 4W F11 DIM 2700K E12	120	3.5	25W	3.8	1.4	280	80	2700K	80
	LED4E26F1127K	LED 4W F11 DIM 2700K E26	120	3.5	25W	3.8	1.4	280	80	2700K	80
	5W Decorative Lamps										
	LED5E12B1127K	LED 5W B11 DIM 2700K E12	120	5.0	40W	3.8	1.4	350	70	2700K	80
	LED5E12B1127KF	LED 5W B11 DIM 2700K E12 FROST	120	5.0	40W	3.8	1.4	350	70	2700K	80
	LED5E12B1130K	LED 5W B11 DIM 3000K E12	120	5.0	40W	3.8	1.4	375	75	3000K	80
	LED5E12B1150K	LED 5W B11 DIM 5000K E12	120	5.0	40W	3.8	1.4	375	75	5000K	80
	LED5E12B1150KF	LED 5W B11 DIM 5000K E12 FROST	120	5.0	40W	3.8	1.4	375	75	5000K	80
	LED5E26B1127K	LED 5W B11 DIM 2700K E26	120	5.0	40W	3.8	1.4	350	70	2700K	80
	LED5E26B1127KF	LED 5W B11 DIM 2700K E26 FROST	120	5.0	40W	3.8	1.4	350	70	2700K	80
	LED5E26B1130K	LED 5W B11 DIM 3000K E26	120	5.0	40W	3.8	1.4	350	70	3000K	80
	LED5E12F1127K	LED 5W F11 DIM 2700K E12	120	5.0	40W	3.8	1.4	350	70	2700K	80
	LED5E26F1127K	LED 5W F11 DIM 2700K E26	120	5.0	40W	3.8	1.4	350	70	2700K	80