

# Features & Specifications



**INTENDED USE** – LED area lights are all-purpose site lighting fixtures that can be used for parking lots, car dealerships, outdoor stadiums, pathways, and parks. These LED fixtures will yield a significant reduction in energy consumption compared to standard HID systems and virtually eliminate ongoing maintenance expenses with a long-lasting lifespan. Designed for outdoor applications, the LED area light fixtures will provide reduced offsite visibility as well as effective security lighting.

**CONSTRUCTION** – Heavy-duty die cast aluminum housing with bronze polyester powder paint for corrosion-free durability. Resistant to rough vibrations and external impacts. Acrylic lens protects the LEDs and provides even light distribution. Housing is sealed with a silicone gasket, protecting against moisture and environmental contaminants (IP65 rated). Modular LED bricks wired in parallel for ease of maintenance.

**OPTICS** – High-performance LEDs maintain a 14,400 Lumen output at 5000K for 50,000 hours of use. ≥70 CRI. Effective Projected Areas: 0.272 square feet

Type III light distribution is intended for perimeter lighting of parking lots and along the edges of an open area as well as large roadways and parking lot aisles. It casts more light forward so that it can be used to light roads and pathways from the side of the road rather than being installed in the median.

LED area lights are designed to have a more directional beam angle than metal halide and high pressure sodium fixtures so no light is lost within or above the fixture. These LED fixtures also do not lose Lumens in the same way as a HID fixture, meaning the brightness stays consistent longer and needs to be replaced far less frequently.

**ELECTRICAL** – Input voltage of 120-277 VAC, 50/60Hz. Consider adding a surge protector to protect your fixtures from power surges in your electrical system as an added insurance policy to your investment.



**INSTALLATION** – A slipfitter mounting bracket for round pole mounting applications makes retrofit installation simple, resulting in reduced installation time and additional labor savings. Slipfitter mounts provide more flexibility and control over installation and light distribution by offering a broader range of angles than a stationary arm.

**LISTINGS** – UL Certified to safety standards for wet location. Rated for -40°C to 45°C ambient temperature. IP-65 Rated.


**WARRANTY** – 5-year warranty. PLT products that are damaged or defective will be repaired or replaced at PLT's choosing for a period of 5 years. Contact 1-800-624-4488 for more information.

**ADD-ONS** – Pair with timers, photocells, and motion sensors for hassle free bright night time lighting and energy savings during the day. If pairing with a photocell, it must be LED compatible in order to operate properly. If using a conventional photocell, be sure to replace it with one rated for use with LEDs. While conventional light sensors will still work with LED fixtures at first, they will burn out prematurely. The same is true for motion sensors.

If you live in the northern hemisphere, your photocells should face north whenever possible. North-facing light sensors allow for the most balanced on/off schedule based on the arc of the sun. If pointed west, it will turn on and off late and vice versa for east-facing light sensors. Photocells facing the south will be exposed to the most direct sunlight which can burn out the components and cause premature failure. If you want your lights to come on early or late, we recommend pointing the light sensor northeast or northwest, respectfully. The opposite is true south of the equator.




**Dimensions**  
 Height: 13.06 in.  
 Width: 12.31 in.  
 Depth: 2.5 in.


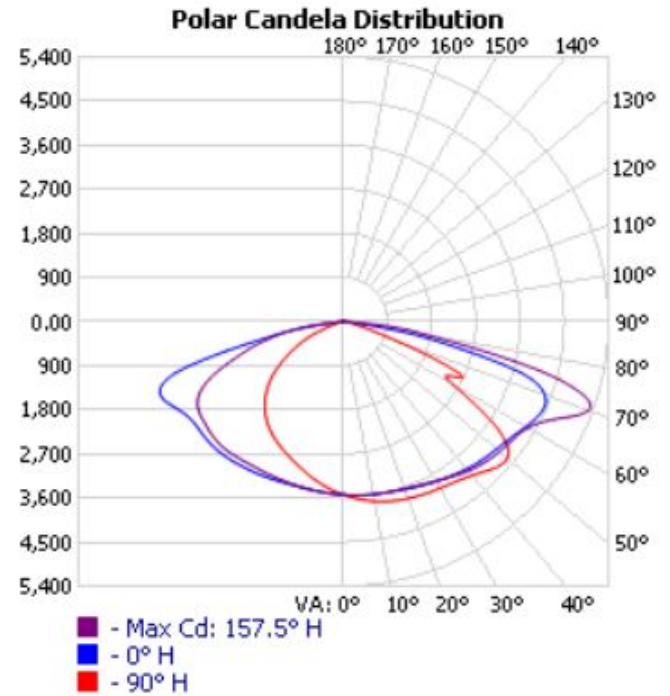


SKU #	Kelvin	Lumens	Wattage	Voltage	CRI	DLC?	Mounting	Life Hours	Warranty
LEDF-10104	5000	14,400	120	120-277	70	NO	SLIP FITTER	50,000	5 YEARS

INTENSITY DISTRIBUTION DIAGRAM  
IN C PLANS

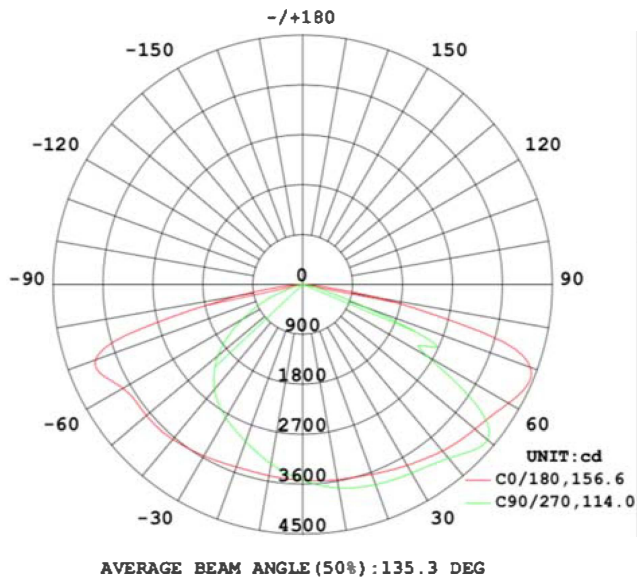

MAX INTENSITY CONE SURFACE  
DISTRIBUTION DIAGRAM

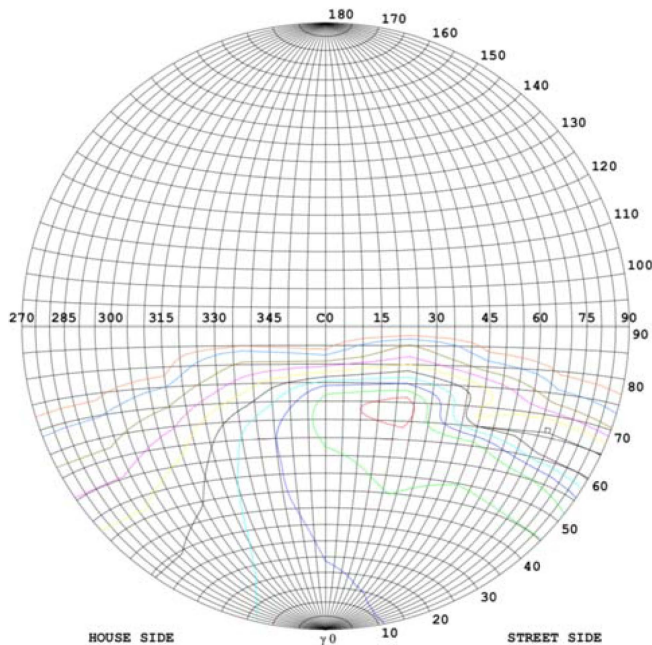
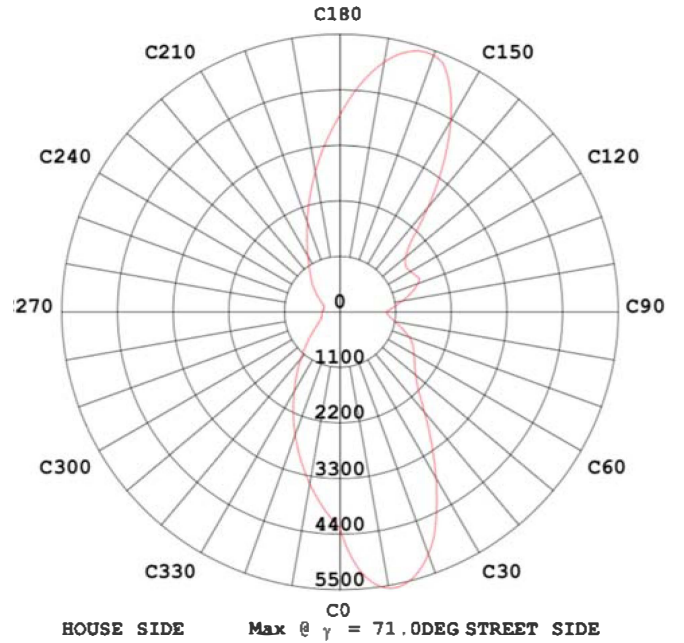



Classification:



IES: Type III - Medium  
 CIE: Average - Long IES:  
 Semi cut-off  
 CIE: Non-cut-off  
 Max. At 80: 140.7 cd/klm  
 Max. At 90: 0.4806 cd/klm  
 Max. 80-90: 140.7 cd/klm

ISOCANDELA DIAGRAM

UNIT	cd
I <sub>max</sub> =100%	5328
90%	4795
80% 4262	
70%	3729
60%	3197
50%	2664
40%	2131
30%	1598
20%	1066
10%	533
5%	266

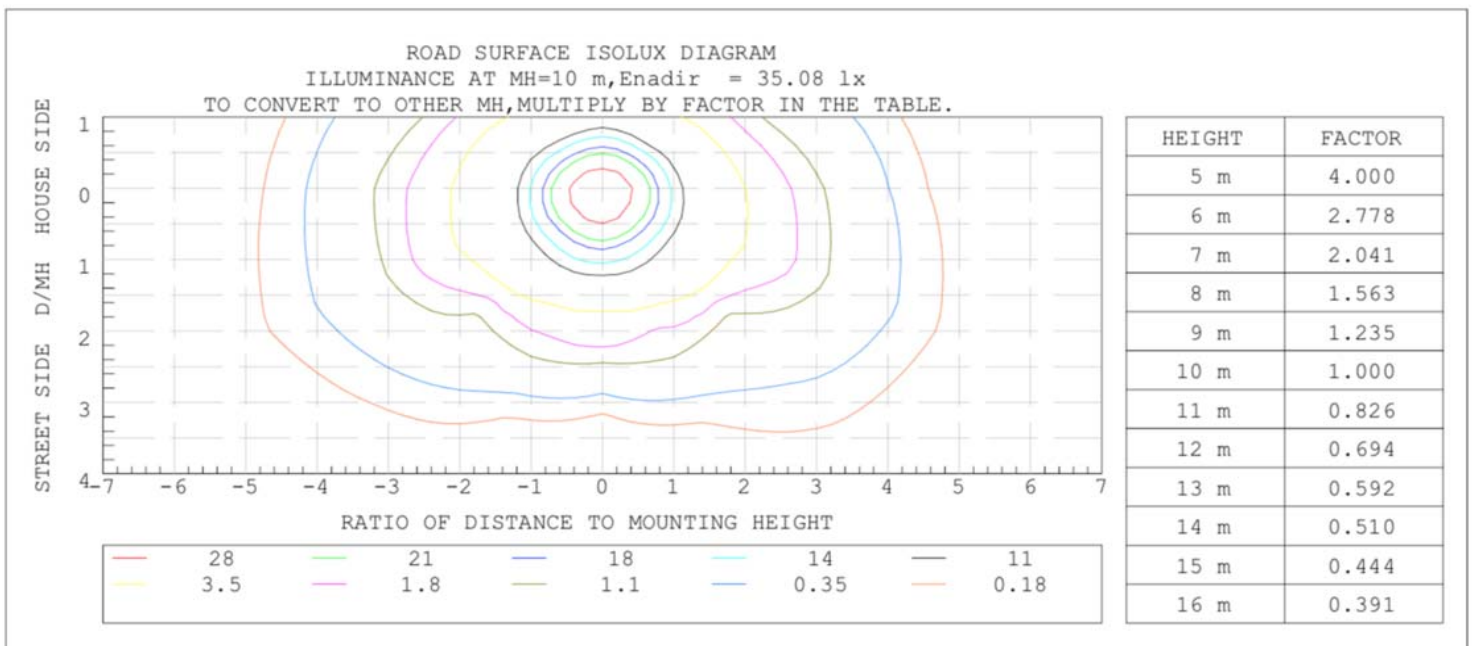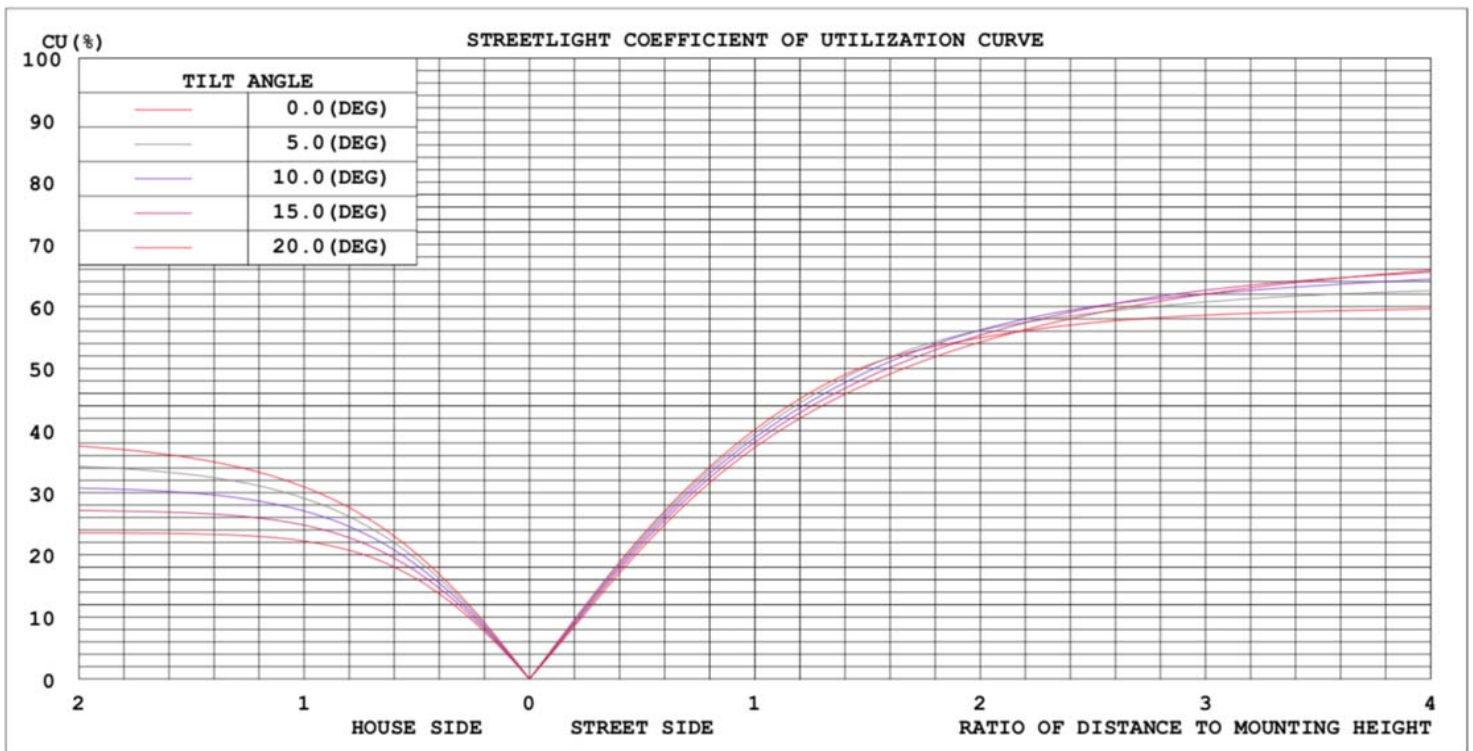

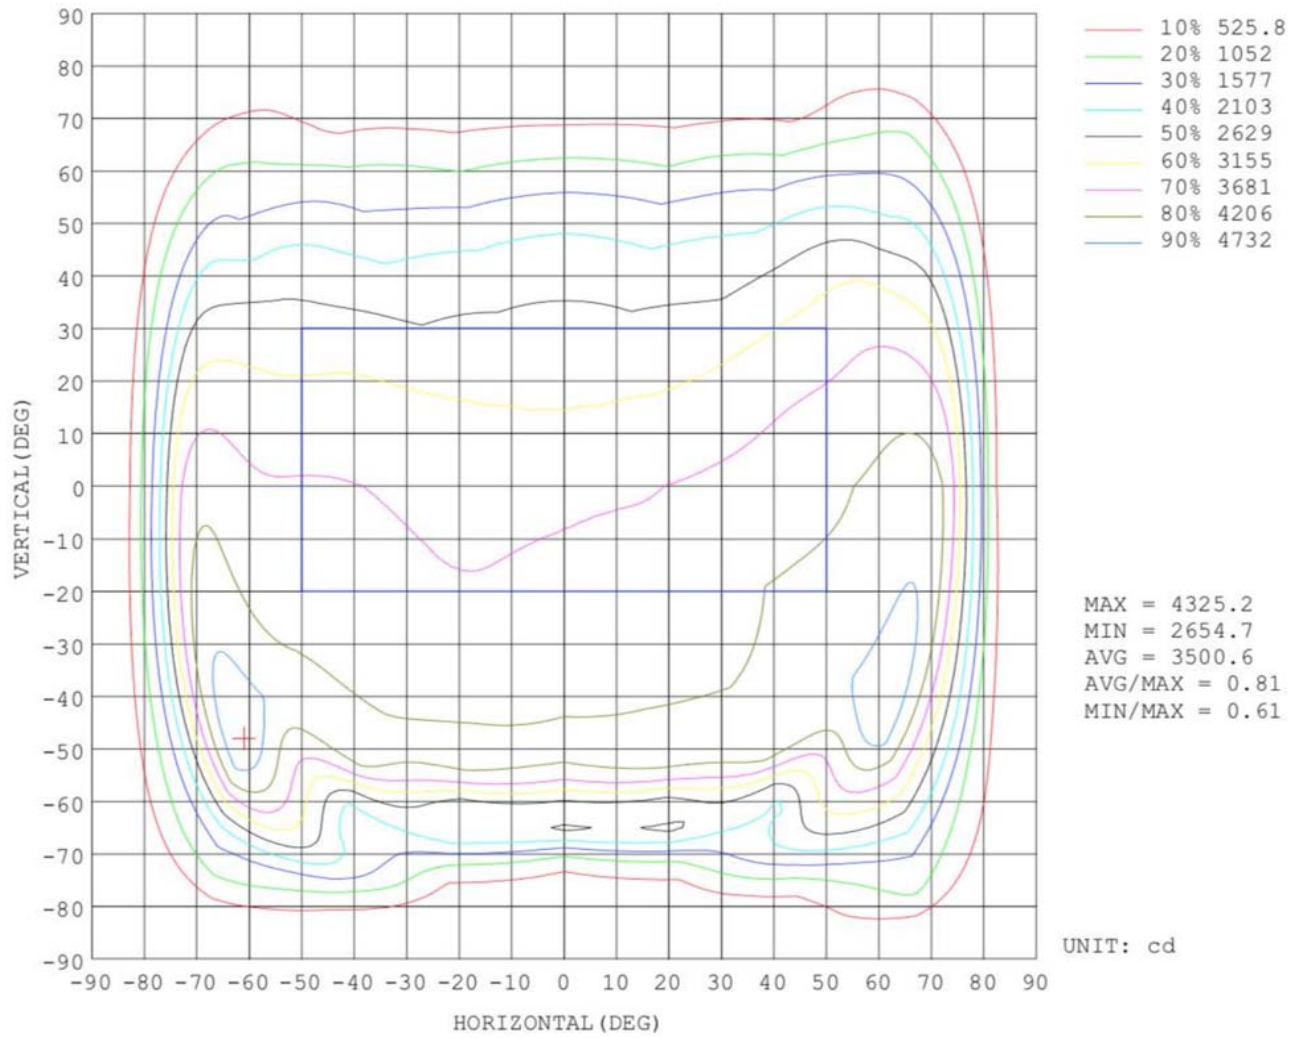

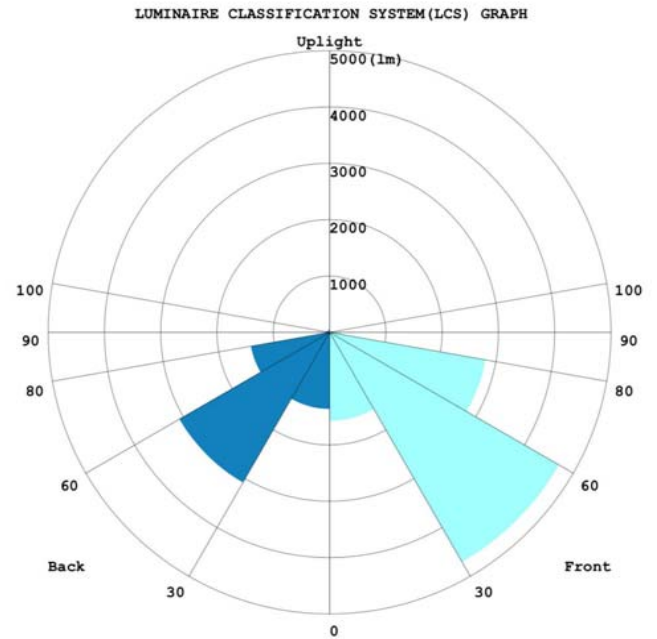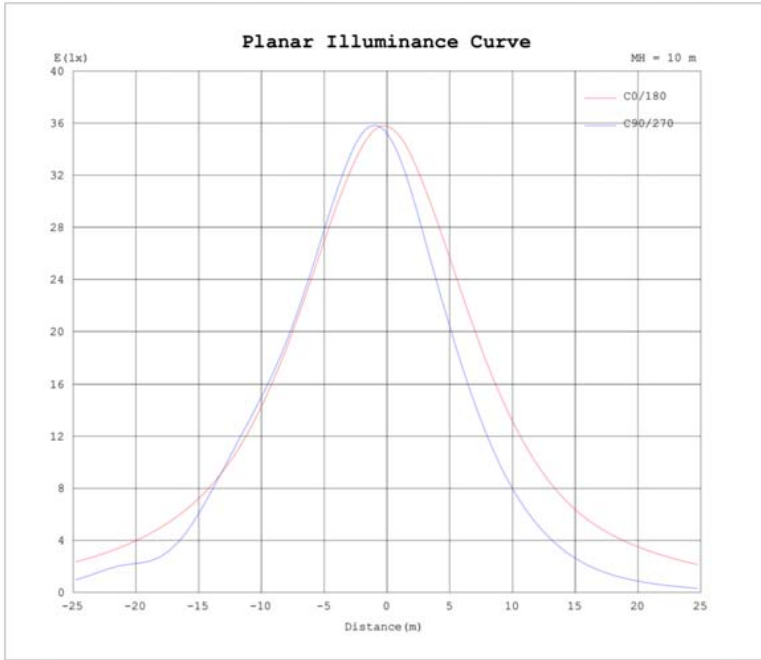

### Improved LED Modules design

- \*\* No soldering on production line, assembly speed fastened
- \*\* Plug-in pin for LED modules, easy assembly & replace in future
- \*\* Temp of LED Board: 60° C (Ambient Temp=25° C)

### LED Lens

- \*\* Type III, Type V, 90x120°
- \*\* With small pins on the back side for locating the connection hole on the LED board, to avoid wrong direction assembly.

Waterproof apron for LED modules.

### Extruded aluminum heat sink, coefficient of heat transfer up to 221

- \*\* Heat dissipation trippled than before
- \*\* Lighter weight
- \*\* LED Modules can directly connected to heat sink, the temp difference between is only 2-3° C
- \*\* Temp for heat sink= 60° C (Ambient Temp=25° C)


### Die-casting aluminum power pack

- \*\* Reliable structure
- \*\* Better for IP rating
- \*\* Isolates the heat generated from the LED Modules to power supply
- \*\* Simple but reliable way to fix driver, easy to replace in future.

### Patent, Unique slide-in Mount installation

- \*\* Ideal for inventory
- \*\* Ideal for SKD
- \*\* Easy installation
- \*\* Save labor cost
- \*\* Will not affect light, power & IP rating when changing the mount.

Clamshell power supply cover  
Much more convenient for installation, save labor cost.

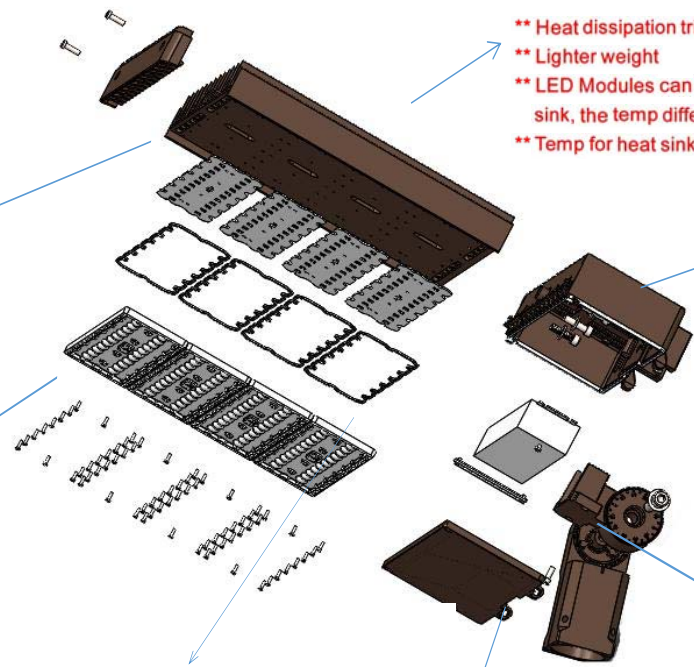

## STANDARD MOUNT-SLIP FITTER



- ◆ Installation angle: 0-90°
- ◆ Max Pole size: 2-3/8"
- ◆ Each rotation is 4°
- ◆ Max Load Weight: 110lbs
- ◆ Installation: for round pole

