



FEATURES

- System Light Efficacy 125 LPW
- Easy Installation & Maintenance
- IP65
- 5 Year Warranty
- Optional Shade Included for Field Installation
- ETL Listed



50% ENERGY EFFICIENCY & LONG LIFE
60% MORE ENERGY EFFICIENT THAN STANDARD HID LAMPS
TYPICAL PAYBACK OF 1 - 3 YEARS

SKU #	Kelvin	Lumens	CRI	Wattage	Voltage	DLC?	Mounting	Life Hours	Warranty
PLT-10958	3500	20000	80	160	120-277	No	RING	155000	5 years

ADDITIONAL PHOTOS



FEATURES

- Easy Installation & Maintenance
- System Light Efficacy 125 LPW
- Superior Heat Management

TYPICAL APPLICATIONS

- Warehouse, Retail, Gymnasiums
- Convention Centers, Sport Arenas

WARRANTY

WARRANTY **5 Years**

SPECIFICATIONS

PERFORMANCE

Philips Lumileds LED Chip
 20,000 Lumen Output (IES)
 160W Power Consumption
 ≥125 lm/W Efficacy (IES)
 3500K Color Temperature
 ≥80 CRI
 L70>155,000 Hours Lumen Maintenance
 120-277 VAC Input Voltage
 0.95 Power Factor

ENVIRONMENTAL



IP-65 Rating
 -30 to 45°C Operating Temperature
 15% to 90% RH Humidity

PHYSICAL

Dimensions (16.3 x 16.3 x 13.1 in.)
 Weight 9.3 lbs.
 Hanging Ring Mounting Options
 Fixture Material Aluminum Alloy



PHOTOMETRICS

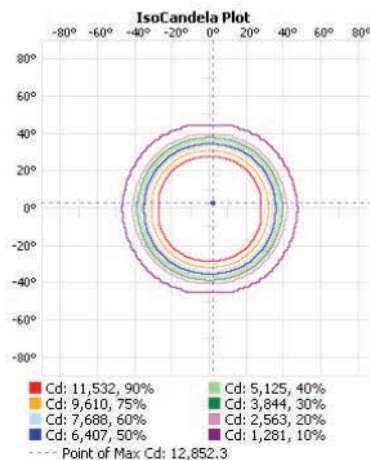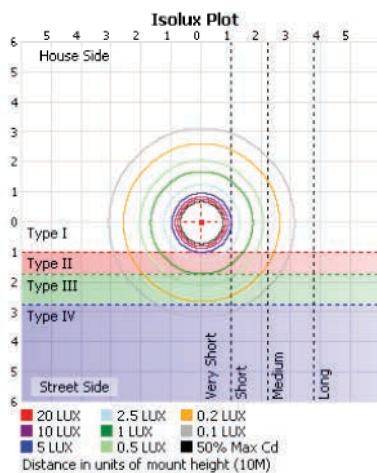

Illuminance at a Distance

Distance	Center Beam LUX	Beam Width
2.0M	3,199.5 LUX	2.8 M
4.0M	799.9 LUX	5.6 M
6.0M	355.5 LUX	8.3 M
8.0M	200.0 LUX	11.1 M
10.0M	128.0 LUX	13.9 M

■ Vert. Spread: 69.6°
 ■ Horiz. Spread: 70.6°