

DESCRIPTION

Replace existing fluorescent wraparound fixture with these LED wraparound fixtures to reduce maintenance and energy costs.

FEATURES

- Efficiently replaces a 4 lamp fluorescent fixture
- Delivers up to 120 LPW; output will vary depending on the wattage selected
- Wide body helps cover any marks or imperfections left by old fixtures
- 0-10V dimming

LISTINGS

- UL rated for damp locations
- RoHS

PERFORMANCE

- CRI: 80+
- CCT: 5000K
- Rated Lifetime L70: 50,000 hours

THERMAL

- -4°F to 122°F (-20°C to 50°C) operating temperature

ELECTRICAL

- THD: <20%
- Power Factor: >0.9
- Input Voltage: 120-277V
- Dimmable power supply (0-10V)

INSTALLATION

- Designed for surface mounting with included mounting hardware; see installation instructions for more details

CONSTRUCTION

- Steel plate housing with white finish and plastic endcap
- PMMA lens protects LEDs while evenly distributing light

WARRANTY

- 5 year limited warranty; see pltsolutions.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date




APPLICATIONS

- Stairways
- Bathrooms
- Utility and Storage Areas
- Hallways
- Offices

PERFORMANCE SUMMARY

Item #	Watts	Lumens	LPW	CCT	CRI	Dimming	Voltage	Replaces
PLT-90183	65W	7800	120	5000K	80+	Yes	120-277V	4 Lamp Fluorescent

DIMENSIONS

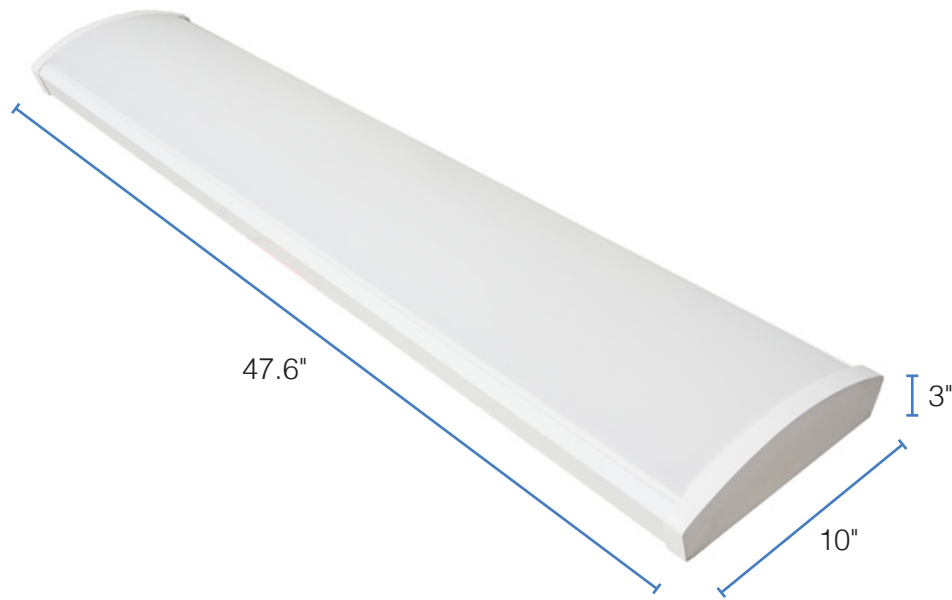

DIMENSIONS

Length: 47.6"

Height: 3"

Width: 10"

Weight: 7.05 lbs