

Project Name:	Type:
Part Number:	Date:




GREENCREATIVE

# PREMIUM FILAMENT DECO. FAMILY

## FEATURES

- Suitable to replace 40W and 60W incandescent
- Vintage look fits most decorative applications
- 320° omnidirectional beam angle
- Smooth dimming with most forward and reverse phase controls\*
- Comfortable warm diffused light
- Full glass construction
- Suitable for use in wet locations, not suitable for use in totally enclosed fixtures
- Fixture operating temperature: -13°F to 95°F (-25°C to 35°C)
- Lamp ambient temperature: -13°F to 113°F (-25°C to 45°C)
- Rated Lifetime (L70): 15,000hrs
- 3 year limited warranty\*\*

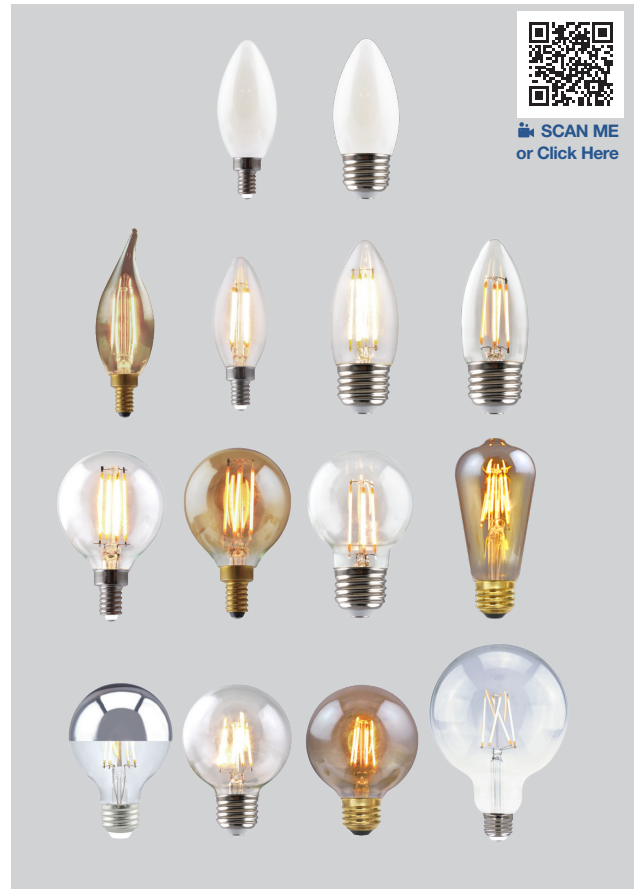

060523



## SPECIFICATIONS

Product	Model	Equiv.	CCT	Finish	Wattage (W)	Lumens (LM)	Efficacy (LPW)	Power Factor	Input Voltage	CRI	Beam Angle	Dim.*	UL Location	Fixture Rating	ES / T20
36061	3.3FB11DIM/927/R	40W	2700K	Clear	3.3	300	91	0.7	120V	92	320°	Yes	Wet	Non-Enclosed	√ / √
36062	3.3FB11DIM/927/E26/R	40W	2700K	Clear	3.3	300	91	0.7	120V	92	320°	Yes	Wet	Non-Enclosed	√ / √
36063	3.3FB11DIM/927/FR/R	40W	2700K	Frosted	3.3	300	91	0.7	120V	92	320°	Yes	Wet	Non-Enclosed	√ / √
36064	5.5FB11DIM/927/R	60W	2700K	Clear	5.5	500	91	0.7	120V	92	320°	Yes	Wet	Non-Enclosed	√ / √
36065	5.5FB11DIM/927/E26/R	60W	2700K	Clear	5.5	500	91	0.7	120V	92	320°	Yes	Wet	Non-Enclosed	√ / √
36066	3.5FBA11DIM/820/FT/A/R	40W	2000K	Amber	3.5	240	69	0.7	120V	82	320°	Yes	Wet	Non-Enclosed	N.A. / N.A.
36745	3.3FB11DIM/824/FR	40W	2400K	Frosted	3.3	300	91	0.7	120V	82	320°	Yes	Wet	Non-Enclosed	N.A. / N.A.
36670	3.3FB11DIM/824/FR/E26	40W	2400K	Frosted	3.3	300	91	0.7	120V	82	320°	Yes	Wet	Non-Enclosed	N.A. / N.A.
35085	3.8FB11DIM/824/FR	40W	2400K	Frosted	3.8	300	79	0.7	120V	82	300°	Yes	Wet	Non-Enclosed	N.A. / N.A.
35086	3.8FB11DIM/824/FR/E26	40W	2400K	Frosted	3.8	300	79	0.7	120V	82	300°	Yes	Wet	Non-Enclosed	N.A. / N.A.
36067	3.8FG16.5DIM/927/R	40W	2700K	Clear	3.8	350	91	0.7	120V	92	320°	Yes	Wet	Non-Enclosed	√ / √
36068	3.8FG16.5DIM/927/E26/R	40W	2700K	Clear	3.8	350	91	0.7	120V	92	320°	Yes	Wet	Non-Enclosed	√ / √
36069	4FG16.5DIM/820/A/R	40W	2000K	Amber	4	250	63	0.7	120V	82	320°	Yes	Wet	Non-Enclosed	N.A. / N.A.
36070	3.8FG25DIM/927/R	40W	2700K	Clear	3.8	350	92	0.7	120V	92	320°	Yes	Wet	Non-Enclosed	√ / √
36071	4FG25DIM/820/A/R	40W	2000K	Amber	4	250	63	0.7	120V	82	320°	Yes	Wet	Non-Enclosed	N.A. / N.A.
36072	4.5FG25DIM/827/SB/R	40W	2700K	Silver Bowl	4.5	400	89	0.7	120V	82	320°	Yes	Wet	Non-Enclosed	N.A. / N.A.
36073	5.5FG40DIM/927/R	60W	2700K	Clear	5.5	500	91	0.7	120V	92	320°	Yes	Wet	Non-Enclosed	√ / √
36074	4FST19DIM/820/A/R	40W	2000K	Amber	4	300	75	0.7	120V	82	320°	Yes	Wet	Non-Enclosed	N.A. / N.A.

\* This lamp might not be compatible with all dimmers. Please visit [www.greencreative.com](http://www.greencreative.com) for compatibility information.

\*\* Please visit [www.greencreative.com](http://www.greencreative.com) for Limited Warranty terms.



# PREMIUM FILAMENT BULB & DECO

## MODEL

- Model: 3.3FB11DIM/927/R
- 3.3FB11DIM/927/E26/R
- 3.3FB11DIM/927/FR/R
- 3.5FBA11DIM/820/FT/A/R
- 3.8FG16.5DIM/927/R
- 3.8FG16.5DIM/927/E26/R
- 4FG16.5DIM/820/A/R
- 3.8FG25DIM/927/R
- 4FG25DIM/820/A/R
- 4.5FG25DIM/827/SB/R
- 5.5FG40DIM/927/R
- 5.5FB11DIM/927/R
- 5.5FB11DIM/927/E26/R
- 3FT6DIM/820/A/R
- 5FA19DIM/927/R
- 5FA19DIM/927/FR/R
- 5FA19DIM/820/A/R
- 9FA19DIM/927/FR/R
- 9FA19DIM/927/R
- 7.5FA19DIM/827/SB/R



## DIMMER COMPATIBILITY


Brand	Series	Model	Load (W)	Dimming Range	Compatibility
Lutron	Diva	DV-600P	600	0-100%	Compatible
	Toggler	TG-600P	600	0-100%	Compatible
	Skylark Contour	CTCL-153P	150	0-100%	Compatible
	Diva	DVCL-153P	150	0-100%	Compatible
	Maestro C•L	MACL-153P	150	0-100%	Compatible
	Maestro	MAELV-600	600	0-100%	Compatible
	Skylark Contour	CTELV-303P	300	0-100%	Compatible
	Diva	DVELV-300P	300	0-100%	Compatible
	Nova	NTELV-600P	600	0-100%	Compatible
	Caseta	PD-5NE	250	0-100%	Compatible
Leviton	Sureslide Decora	6674	600	0-100%	Compatible*
	Trimatron	6602	600	-	Not Compatible
	Illumatech	IPE04-1LZ	300	0-100%	Compatible
Cooper	Aspire	9536	1000	-	Not Compatible

\*: Not compatible only for these models: 5FA19DIM/927/R; 5FA19DIM/927/FR/R; 5FA19DIM/820/A/R 4.5FG25DIM/827/SB/R; 5.5FG40DIM/927/R; 5.5FB11DIM/927/R; 5.5FB11DIM/927/E26/R.

GREEN CREATIVE has provided this dimmer switch compatibility chart for guidance when selecting a dimmer and lamp combination. Our lamps were tested for compatibility with the above listed dimmers. Dimmers that do not appear on the chart might still be compatible but have not been tested. All testing has been performed with a stable main supply. The quality of the local main, existing installation and wiring, as well as different manufacturer versions of the above dimmers may affect dimming performance. Since no assurance can be provided regarding these factors, it is a general recommendation to perform a test on-site prior to installing the LED lamps.

# PREMIUM FILAMENT DECO. FAMILY

## DIMENSION & WEIGHT

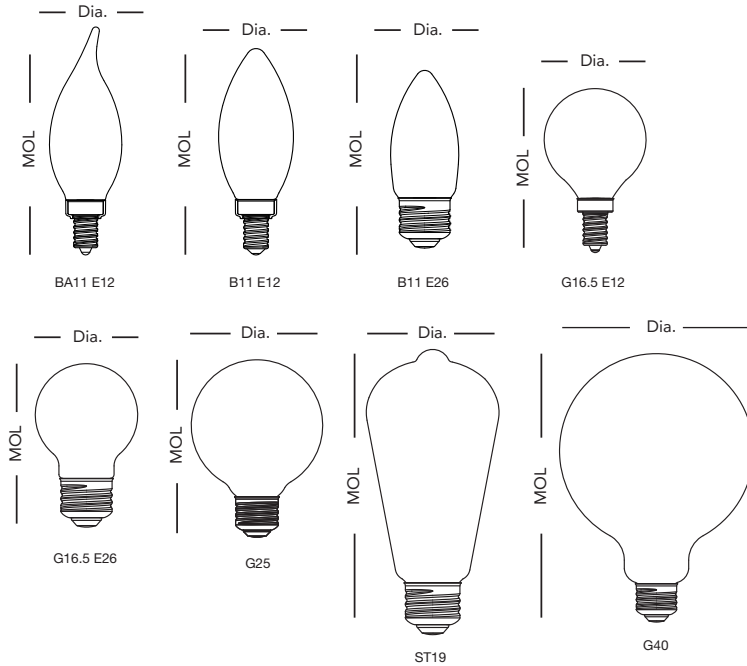

Product	Model	Base	MOL	Dia.	Weight
36061	3.3FB11DIM/927/R	E12	3-13/16"	1-3/8"	0.03lb
36062	3.3FB11DIM/927/E26/R	E26	3-9/16"	1-3/8"	0.04lb
36063	3.3FB11DIM/927/FR/R	E12	3-13/16"	1-3/8"	0.03lb
36064	5.5FB11DIM/927/R	E12	3-13/16"	1-3/8"	0.03lb
36065	5.5FB11DIM/927/E26/R	E26	3-9/16"	1-3/8"	0.04lb
36066	3.5FBA11DIM/820/FT/A/R	E12	4-3/8"	1-3/8"	0.03lb
36745	3.3FB11DIM/824/FR	E12	3-13/16"	1-3/8"	0.03lb
36670	3.3FB11DIM/824/FR/E26	E26	3-9/16"	1-3/8"	0.04lb
35085	3.8FB11DIM/824/FR	E12	3-13/16"	1-3/8"	0.03lb
35086	3.8FB11DIM/824/FR/E26	E26	3-9/16"	1-3/8"	0.04lb
36067	3.8FG16.5DIM/927/R	E12	3-3/16"	1-15/16"	0.04lb
36068	3.8FG16.5DIM/927/E26/R	E26	3-1/4"	2-1/16"	0.04lb
36069	4FG16.5DIM/820/A/R	E12	3-3/16"	1-15/16"	0.04lb
36070	3.8FG25DIM/927/R	E26	4-5/16"	3-1/8"	0.09lb
36071	4FG25DIM/820/A/R	E26	4-5/16"	3-1/8"	0.09lb
36072	4.5FG25DIM/827/SB/R	E26	4-5/16"	3-1/8"	0.09lb
36073	5.5FG40DIM/927/R	E26	6-7/8"	4-15/16"	0.22lb
36074	4FST19DIM/820/A/R	E26	5-3/8"	2-1/2"	0.1lb

## ORDERING INFORMATION

Model	Product Series	Master Carton			Shipping Carton		
		Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
36061	3.3FB11DIM/927/R	6 PCS	4-15/16" x 3-5/16" x 4-3/4"	0.53lb	24 PCS	10-5/8" x 7-1/2" x 5-5/16"	2.34lb
36062	3.3FB11DIM/927/E26/R	6 PCS	4-15/16" x 3-5/16" x 4-3/4"	0.53lb	24 PCS	10-5/8" x 7-1/2" x 5-5/16"	2.34lb
36063	3.3FB11DIM/927/FR/R	6 PCS	4-15/16" x 3-5/16" x 4-3/4"	0.53lb	24 PCS	10-5/8" x 7-1/2" x 5-5/16"	2.34lb
36064	5.5FB11DIM/927/R	6 PCS	4-15/16" x 3-5/16" x 4-3/4"	0.53lb	24 PCS	10-5/8" x 7-1/2" x 5-5/16"	2.34lb
36065	5.5FB11DIM/927/E26/R	6 PCS	4-15/16" x 3-5/16" x 4-3/4"	0.53lb	24 PCS	10-5/8" x 7-1/2" x 5-5/16"	2.34lb
36066	3.5FBA11DIM/820/FT/A/R	6 PCS	4-15/16" x 3-5/16" x 5-1/8"	0.59lb	24 PCS	6-7/8" x 7-11/16" x 5-7/8"	2.65lb
36745	3.3FB11DIM/824/FR	6 PCS	4-15/16" x 3-5/16" x 4-3/4"	0.53lb	24 PCS	10-5/8" x 7-1/2" x 5-5/16"	2.34lb
36670	3.3FB11DIM/824/FR/E26	6 PCS	4-15/16" x 3-5/16" x 4-3/4"	0.53lb	24 PCS	10-5/8" x 7-1/2" x 5-5/16"	2.34lb
35085	3.8FB11DIM/824/FR	6 PCS	4-15/16" x 3-5/16" x 4-3/4"	0.53lb	24 PCS	10-5/8" x 7-1/2" x 5-5/16"	2.34lb
35086	3.8FB11DIM/824/FR/E26	6 PCS	4-15/16" x 3-5/16" x 4-3/4"	0.53lb	24 PCS	10-5/8" x 7-1/2" x 5-5/16"	2.34lb
36067	3.8FG16.5DIM/927/R	12 PCS	6-7/8" x 4-3/4" x 8-7/16"	1.32lb	48 PCS	14-3/8" x 10-1/16" x 9-1/16"	5.69lb
36068	3.8FG16.5DIM/927/E26/R	12 PCS	6-7/8" x 4-3/4" x 8-7/16"	1.32lb	48 PCS	14-3/8" x 10-1/16" x 9-1/16"	5.69lb
36069	4FG16.5DIM/820/A/R	12 PCS	6-7/8" x 4-3/4" x 8-7/16"	1.32lb	48 PCS	14-3/8" x 10-1/16" x 9-1/16"	5.69lb
36070	3.8FG25DIM/927/R	6 PCS	10-7/16" x 7-1/16" x 5-11/16"	1.29lb	24 PCS	21-5/8" x 14-15/16" x 6-11/16"	5.62lb
36071	4FG25DIM/820/A/R	6 PCS	10-7/16" x 7-1/16" x 5-11/16"	1.29lb	24 PCS	21-5/8" x 14-15/16" x 6-11/16"	5.62lb
36072	4.5FG25DIM/827/SB/R	6 PCS	10-5/8" x 7-1/4" x 5-5/16"	1.29lb	24 PCS	21-13/16" x 14-7/8" x 6-1/8"	5.62lb
36073	5.5FG40DIM/927/R	6 PCS	15-15/16" x 10-13/16" x 7-7/8"	2.31lb	12 PCS	16-9/16" x 11-1/4" x 16-9/16"	9.70lb
36074	4FST19DIM/820/A/R	6PCS	8-3/4" x 5-15/16" x 6-1/2"	1.08lb	24PCS	18-1/8" x 12-5/8" x 7-1/2"	5.29lb



# PREMIUM FILAMENT DECO. FAMILY

## CERTIFICATION INFORMATION

Product	Model	ES ID#
36061	3.3FB11DIM/927/R	2329592
36062	3.3FB11DIM/927/E26/R	2331414
36063	3.3FB11DIM/927/FR/R	2378377
36064	5.5FB11DIM/927/R	2378396
36065	5.5FB11DIM/927/E26/R	2378395
36067	3.8FG16.5DIM/927/R	2378394
36068	3.8FG16.5DIM/927/E26/R	2378387
36070	3.8FG25DIM/927/R	2331415
36073	5.5FG40DIM/927/R	2381717

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.