



LED DLC-4020e

Part #: EFDLCDM/H/12W/840/96D/27K/E26/E Fixture Class: Fixed Recessed



Product Description

LED DLC-4020e, Designed for residential and commercial applications, the DLC-4020e performs with advanced LED energy-saving technology. This 12-Watt LED downlight flawlessly replaces a 75-Watt incandescent without sacrificing an ounce of brightness. Long-lasting and shatter resistant, the Euri Lighting DLC-4020e provides a dimmable Warm White (2700K) color, guarantees 90+ CRI and is compatible with most 5-6" recessed light housings. See DLC-4000e for Soft White (3000K) or DLC-4040e for Bright White (4000K).



Estimated Energy Cost: \$1.44 per year



*Note: Design, features and specifications subject to change without notice. Some features may not be available on all models. Please visit www.eurilighting.com or call 1-888-743-5766 for more information.

Specifications

Input Power	Input Voltage	Lumen Output	Beam Angle	Center Beam	CCT
12 W	120 V	840 lm	96°	N/A	2700 K
CRI	Luminous Efficacy	Power Factor	Input Current	Base	Lamp Lifespan
90+	70 lm/W	0.9	0.11 A	E26 Adapter	35,000 Hrs.

Product Features



Dimmable



Instant-On/Off




Mercury Free




Wet Rated

Product Dimensions

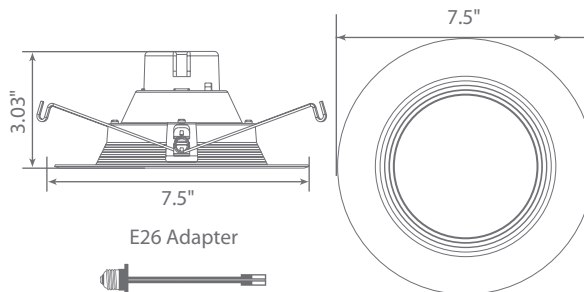

Product Photometric Data

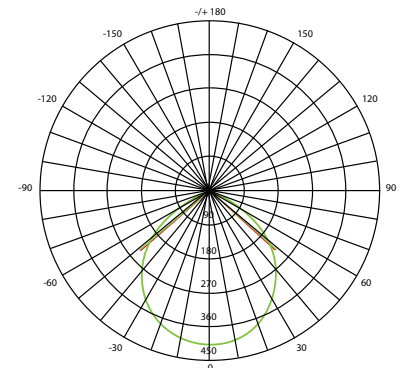

Euri Lighting | A Division of IRTRONIX Inc.

20900 Normandie Avenue Bldg. B, Torrance, CA 90502 | Tel: 888.743.5766 | Fax: 310.787.1166 | www.eurilighting.com
 ©2018 Euri Lighting. All Rights Reserved



LED DLC-4020e

Part #: EFDLCDM/H/12W/840/96D/27K/E26/E Fixture Class: Fixed Recessed

Compatible Dimmers

LUTRON: SCL-153P, AY600P, CN-600, D-603PH, LGCL-153PL, DV-603PG, TTCL-100H, TT-300, DV-600P, GL-600H, AYCL-153P, TG-600PHLH, TGCL-153P, DVCL-153PL, MA-600, DVLV-600, LGCL-153PL, DVCL-153P, NELV-450, DVELV-300P, SELV-300P

LEVITON: IPI06, 6683, 6633-P, 6674, 6672, 6613-P

LEGRAND: CD703-PW, H703PTCCCV6, HCL453PTCCCV6, D703-PTC, DLV703-PLA

COOPER: 9530WS, DLC03P