



Accessory | Remote



Buttons	Function	Performance
	ON/OFF	Turn ON or OFF light and keep the sensor in ON/OFF mode.
	Auto	Enter into SENSOR MODE and perform the last time setting.
	Reset	Go back to default program; Enter into SENSOR MODE and perform the default program.
Function Programming Buttons ▼		
	Scenes	Keep favorable program(Detection area, holdtime, daylight threshold, standby dim level and standby period) into different scenes and apply them quickly.
	Start	Press this button to start programming, S icon on LCD screen display started to blink; after programming press MEMORY button, S icon keeps being.
	Memory	Press this button to memorize program and saved it into SCENES; after pressing it, M icon's bright then off after 3S.
	Apply	Press this button to send the program(detection area, holdtime, daylight threshold, standby dim level and standby period) and sensor works in SENSOR mode.
	Mounting Height	Adjust detection area/sensitivity levels according to real installation situations, higher or lower.
	Send	Memorize and send out the last time setting of individual parameters(detection area, hold time, standby dim level, standby period, daylight threshold, power, CCT, Daylight Harvesting, ON/OFF, Auto, Reset, Mounting Height, test)
	Detection Area	Adjust from detection area options 25%, 50%, 75% and 100%.
	Daylight Threshold	Adjust from daylight threshold options, there are "-"(disable), 2lux, 10lux, 30lux, 50lux, 80lux, 120lux, 200lux, 250lux, 300lux, 350lux, 400lux, LEN(daylight learning).
	Standby Dim Level	Adjust from standby dim levels, 10%, 20%, 30% and 50%.
	Hold Time	Adjust from hold time options: 5S, 30S, 1min, 3min, 5min, 10min, 20min and 30min.
	Standby Period	Adjust from Standby Period options, 0S, 10S, 30S, 1min, 5min, 10min, 30min, 60min and "-" as infinite.
	CCT Selectable	[To work with CCT supported sensors]Adjust from CCT options, 2700K, 3500K, 4000K, 5000K, 5700K, 6500K.
	Brightness Adjustable	Adjust brightness in both ON/OFF mode & SENSOR mode, minimum 10%, max 100%, each pressing makes 5% change.
	Reserved Button	This remote control works for the next years, we keep this reserved button for the future reference.
	Daylight Harvesting	Daylight harvesting function enabled or disabled.
	Test Button	Quick testing button for only 2S ON then OFF.
	+	Choose higher parameters. Tips: 1. Press POWER button then keep pressing + button get you directly to 100%.
	-	Choose lower parameters. Tips: 1. Press POWER button then keep pressing - button get you directly to 10%.



## ELECTRIC PARAMETERS

Working Voltage:	AAA Battery - 2pcs (2.2-3V)
Screen OFF Duration:	60s
Icon Flicking Duration:	5s
M(Memory) button Flicking Duration:	10s
Carrier Frequency:	3s
Operation Distance Max.:	38KHz±2KHz
Emission Angle:	15M/ 49ft (3V)
Standby Current:	< 30 degree
Working Current:	<1.2uA
Peak Current:	<30mA
Working Temp:	- 20°C~ +60°C (- 4°F~ 140°F)
Storage Temp:	- 30°C~ +85°C (- 22°F~ 185°F)


## USER LED SCREEN DISPLAY

100%	Detection Area
0 1m	Hold Time
50%	Standby Dim Level
00 S	Standby Period
200 lux	Daylight Threshold
100%	Brightness
2700k	CCT Selected
AM	AM means "Auto Mode," not "Manual Control Mode"
DH OFF	Daylight Harvesting Enabled or Disabled
S M	"Start" or "Memory" Scene Parameters
SK-02	Reserved Area for the Future
HP	Mounting Height

## WARNING

Remove the batteries from compartment if the remote will not be used in 30 days.

## DIMENSIONS

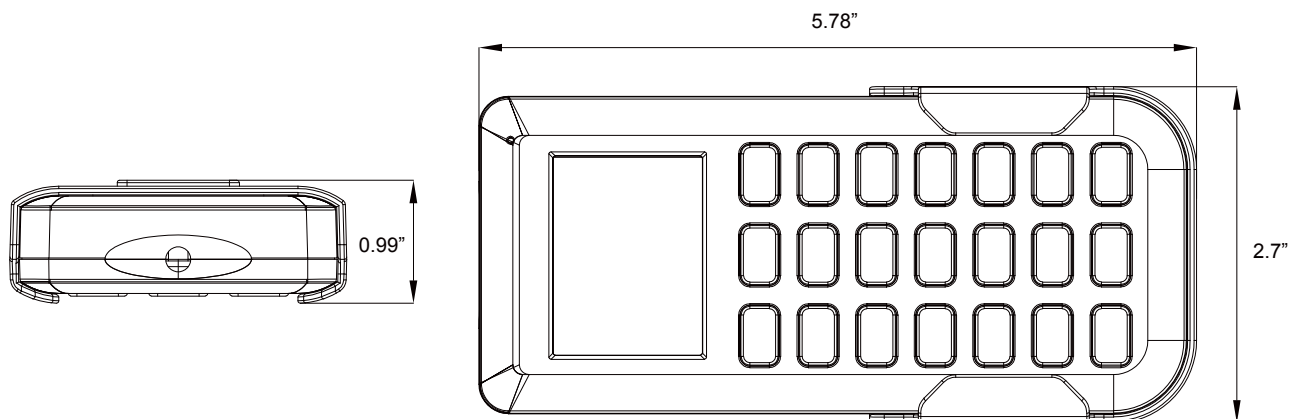

## ARCHIPELAGO LIGHTING

Archipelago Lighting, Inc. is a leading prime manufacturer of commercial and residential lighting products in USA and China. We are a team of passionate lighting professionals whose goal is to improve life through disruptive LED lighting products. We manufacturer a wide variety of products to support the growing adoption of energy efficient LED.

