

PLTS-12278

DESCRIPTION

Reduce energy and maintenance costs by replacing existing HALO track heads with these more efficient color selectable LED step cylinder track heads.

FEATURES

- Energy efficient replacement for 75W PAR30 halogen lamps
- High color rendering index (CRI) of 90 helps makes colors appear brighter and more vivid
- Compatible with HALO single and dual circuit track
- Arm can spin up to 350-degrees vertically; head can be adjusted up to 90-degrees horizontally
- Dimmable; see dimmer compatibility sheet for full list of compatible dimmers
- Color temperature can be adjusted via switch on arm of fixture; see installation instructions for more information

LISTINGS

ETL Listed for indoor/dry locations

PERFORMANCE


- CRI: 90
- CCT: 3000K, 4000K, and 5000K
- LED L70 Life Hours: ≥100,000 hours

ELECTRICAL

- Power Factor: >0.89
- THD: <50%
- Input Voltage: 120V

CONSTRUCTION

- Aluminum housing with white finish
- Polycarbonate lens







WARRANTY

• 5-year limited warranty; see pltsolutions.com for warranty details

APPLICATIONS


- Offices
- Lobbies
- Kitchens
- Art Galleries

PERFORMANCE	Power Consumption	10 Watt		
	Lumens	750		
	Efficacy (LPW)	75		
	CRI	90		
	ССТ	3000K, 4000K, 5000K		
	LED L70 Life Hours	≥100,000		
	Beam Angle	36°		
ELECTRICAL	Power Factor	>0.89		
	THD	<50%		
	Input Voltage	120V		
CONSTRUCTION	Finish	White		
	Lens	Clear		
LISTINGS	Certifications	ETL		
	Environment	Indoor/Dry Locations		

PERFORMANCE SUMMARY

Item #	Lumens	Wattage	LPW	Voltage	Replaces	ССТ	CRI	LED L70 Life Hours	Dimmable
PLTS-12278	750	10	75	120V	75W Halogen	3000K/ 4000K/ 5000K	90	≥100,000	Yes

DIMENSIONS

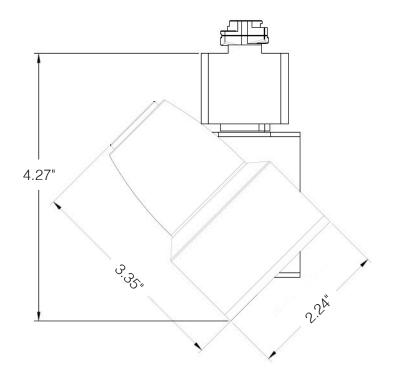

DIMENSIONS

Length: 3.35" Height (with arm): 4.27" Width: 2.24" Weight: 0.69 lbs Arm Length: 3.80"

WARNINGS

• Only use this LED track light head with the dimmers listed in the compatibility list. Using this downlight with incompatible dimmers may cause performance issues including humming, buzzing, flickering, and poor dimming performance.