

LED LINEAR FIXTURE

LINEAR STRIP LIGHT

Model No. ELS8-90W203W

LED ELS8-90W203sw has a color adjustable feature to choose 3500K, 4000K or 5000K. The strip light designed for seamless surface mounting applications. Combining a durable steel housing body and an average rated life of 50,000 hours, this strip light is designed for many years of reliable operation. Ideal for stairwells, hallways, restrooms, storage areas, closets, etc. This high-efficacy luminaire provides long-life and 3CCT selectable, as well as standard dimming option.



N/A

REPLACEMENT



3 Wattage Selectable



3CCT Selectable



0-10V Dimmable



Energy Efficient



High Output

Electrical Specifications


| Input Power | Equivalency | Lumen Output(3500K) | Lumen Output(4000K) | Lumen Output(5000K) | CCT | Estimated Yearly Cost |
|-------------|-------------|---------------------|---------------------|---------------------|-----------------|-----------------------|
| 60 W | N/A | 7800 | 7980 | 7860 | 3500/4000/5000K | \$ 7.22 |
| 75 W | N/A | 9750 | 9750 | 9760 | 3500/4000/5000K | \$ 9.03 |
| 90 W | N/A | 11700 | 11970 | 11790 | 3500/4000/5000K | \$ 10.84 |

| Input Voltage | Luminous Efficacy | Beam Angle | CRI | Input Current | Base | Lamp Lifespan |
|---------------|-------------------|------------|-----|---------------|------|---------------|
| 120-277 V | 130 lm/W | 140° | 80 | 0.83 A | N/A | 50,000 Hrs. |

Mechanical Specifications

| Rating | Operational Temperature | Inner Box QTY. | Master Box QTY. | Dimensions(in.) | UPC Code |
|------------|-------------------------|----------------|-----------------|--------------------------------|--------------|
| Damp Rated | -4°F - 122°F | 1 pc | 4 pcs. | 95.07"(W) x 2.64"(H) x 2.6"(D) | 811174039266 |

Product Dimensions

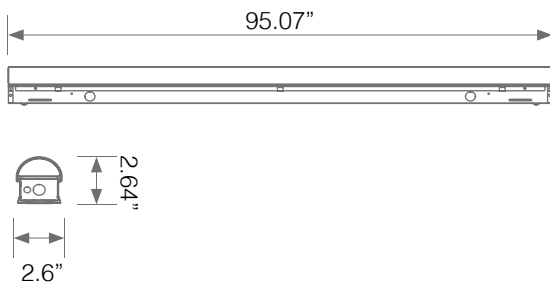

Product Photometric Data

